

SCIENTIFIC AMERICAN

A WEEKLY JOURNAL OF PRACTICAL INFORMATION, ART, SCIENCE, MECHANICS, CHEMISTRY, AND MANUFACTURES.

Vol. XVII.—No. 18.
[NEW SERIES.]

NEW YORK, NOVEMBER 2, 1867.

\$3 per Annum
[IN ADVANCE.]

Improved Single-Needle Knitting Machine.

The Hinkley Family Knitting Machine is the result of a successful attempt to produce a Knitting Machine adapted to the formation of all plain or fancy knit fabrics for family use in a simple and expeditious manner, while free from the complications to which all other "Knitters," with needles numbering from 75 to 125, are subject, although they are generally capable of producing merely a straight circular tube, only susceptible of change by varying the tension of the loop or stopping the machine and taking out or inserting needles each time it is desired to widen or narrow a single stitch.

The desideratum of a simple, cheap, and yet substantial household machine, producing the handsomest and best work, is obtained by the use of a single eye-pointed needle, in connection with a simple looping mechanism and a work-supporting comb traversing longitudinally in front of the needle, which by suitable contrivances, is governed in its motion either automatically or by the operator at option, according to the design of the intended fabric.

The driving wheel, A, Fig. 1, is supported by a standard on the base of the machine, adapted by its crank for hand power, and by passing a band over its grooved periphery to a balance wheel under the table, for a treadle, as in sewing machines. It drives the friction pulley, B, on the shaft, C, which engages in the groove of the driver.

This pulley is the subject of a special patent, and is composed of two parts or halves—one fast and the other loose—facing each other and holding between them a thin circular disk of steel, which by two equi-distant corrugations, springs them apart and is adjustable by set screws, thus giving a short connection without the usual wear on the journal, making no noise, and having a slip sufficient to save the working parts should any obstruction suddenly interfere when in rapid motion.

The disks, D and E, on shaft, C, engage through a right and left hand worm respectively on their inside faces, with the gear, F, and through its shaft and corresponding gear, G, communicate a traversing motion to the rack on the comb, H, of one tooth to each revolution of themselves, each of course reversing the former direction, as by the lever, I, the gear, F, is thrown from connection with one to the other worm.

This shifting lever, I, is either worked automatically at its anterior projection by the arrival of the indexes, J, on the comb—which are moved to any point on the comb at pleasure, governing the width of the fabric—or by shifting the lever by the finger of the operator, in each case, if desired, while the machine is at high speed. The change of position of the lever, I, cants the dog, K, centered in a slot on a swinging bearing, which dog, then striking a small projection on the inner face of D or E, between the worm and the journal, throws the gear, F, into connection with the opposite worm at once, reversing the direction of the rack.

The necessary reciprocating movement of the needle carrier, which holds the needle and its tension, is obtained from the crank pin on the disk, E, by a connecting bar, M, which also operates the looping mechanism, supported on the bracket, L, through the medium of the slotted arm, N, and the oscillating quadrant, O, (see Figs. 2 and 3), in exact conjunction with the advance of the needle, P, and replaces a new loop on such successive tooth of the traversing comb as the needle removes its predecessor.

The numbers to which the indexes, J, Fig. 1, point show at once the width of the fabric, while they remain in that position, and the counter, Q, is pushed forward one notch by

each change of the lever, R, giving, at a glance, the number of stitches in length that the work has progressed, thus automatically saving the old drudgery of counting each stitch, as is still necessary in hand work, or by other knitting machines, and reducing the labor of knitting a stocking or any other fabrication, to a simple rule of changing the indexes at such times as the counter has enumerated a certain number of loops or stitches in length.

The bobbin, S, is attached or detached from the base by means of a short screw, projecting from its bottom, which screw also fits in a screw shank in the center of disk, E, and

ing it on the tooth in readiness, it "sets up" its own work and will not require the loops to be "cast on" previously by hand, that the stitch must be the same as that taken by hand from one needle to the other, and that each edge will be a selvage edge like cloth, and the top of the work—as for instance, a stocking—will be "finished" as it comes from the machine.

From the simple arrangement of parts, it is also evident that both the work and the machinery are in full view of the operator, and easily understood by any one; the machine can be run by the hand or the foot, like a sewing machine; that any size yarn or cord can be used that will pass between the teeth of the comb, which are constructed to admit of all grades; that by its gearing an extreme high speed can be reached, which, with the quickness of widening and narrowing, gives it the preference over the hitherto "fast" knitters; that any desired shape can be produced, regular or irregular; that the tension can be altered in a second; that by reason of its friction gear and worm arrangement it is almost noiseless. It also knits the button-holes in a garment, knits in different yarns without tying them together; knits any fabric from an Afghan to a pair of gloves; knits a stocking complete with a hand heel, knits double if desirable, and requires only a seam up the back to produce hosiery equal to hand-knit, and superior to those formed of a tube with only a small "bulge" on them for heels, and which, after washing, are liable to return to an almost uniform tube.

This machine is patented in this country, Great Britain, France, Belgium, New Brunswick, etc., and received a medal for simplicity at the Paris Exposition. It is manufactured by the Hinkley Knitting Machine Co., at Bath, Me., and all orders and applications for agencies, etc., should be addressed to Edward Sewall, the Sup't and Treas.,


at that place. G. E. Harding, the General Agent for New York, will also furnish information and machines at his office, 726 Broadway, New York city.

Period of the Growth of Man.



Prof. B. A. Gould, from statistics derived from the register of two and a half millions of men in the U. S. Army, has brought out the fact that men attain their maximum stature much later than is generally supposed. This takes place commonly at 29 or 30 years of age; but there are frequent instances of growth until 35, not very noticeable,—a yearly gain of a tenth of an inch perhaps, still a growth. After 35 the stature subsides in similar proportions, partly perhaps from the condensation of the cartilages, partly because of the change in the angle of the hip bone. The age

for maximum stature comes earliest to the tallest men, as if it were the necessity of unusual development. Foreigners were shorter than men of native birth. The heights of men seemed to depend on the place of enlistment. A Massachusetts man enlisting in Iowa was an inch taller than if he had staid at home. As we go West, men grow taller. One man measured more than 6 feet 10 inches. Out of one million, there were five hundred thousand who measured more than 6 feet 4 inches; but men of such stature do not wear well. In Maine, men reached their greatest height at 27, in New Hampshire at 35, in Massachusetts at 29, in New Jersey at 31. The tallest men, of 69 inches, come from Iowa. Maine, Vermont, Ohio, Indiana, Minnesota, and Missouri, give us men a little over 68; and the average of all shows the Americans to be "a very tall people."

THE WEIGHT of a million of dollars in gold (currency) is 53,750 Troy ounces, or 4,479 lbs. 2 oz., equal to 2 $\frac{1}{2}$ tons.

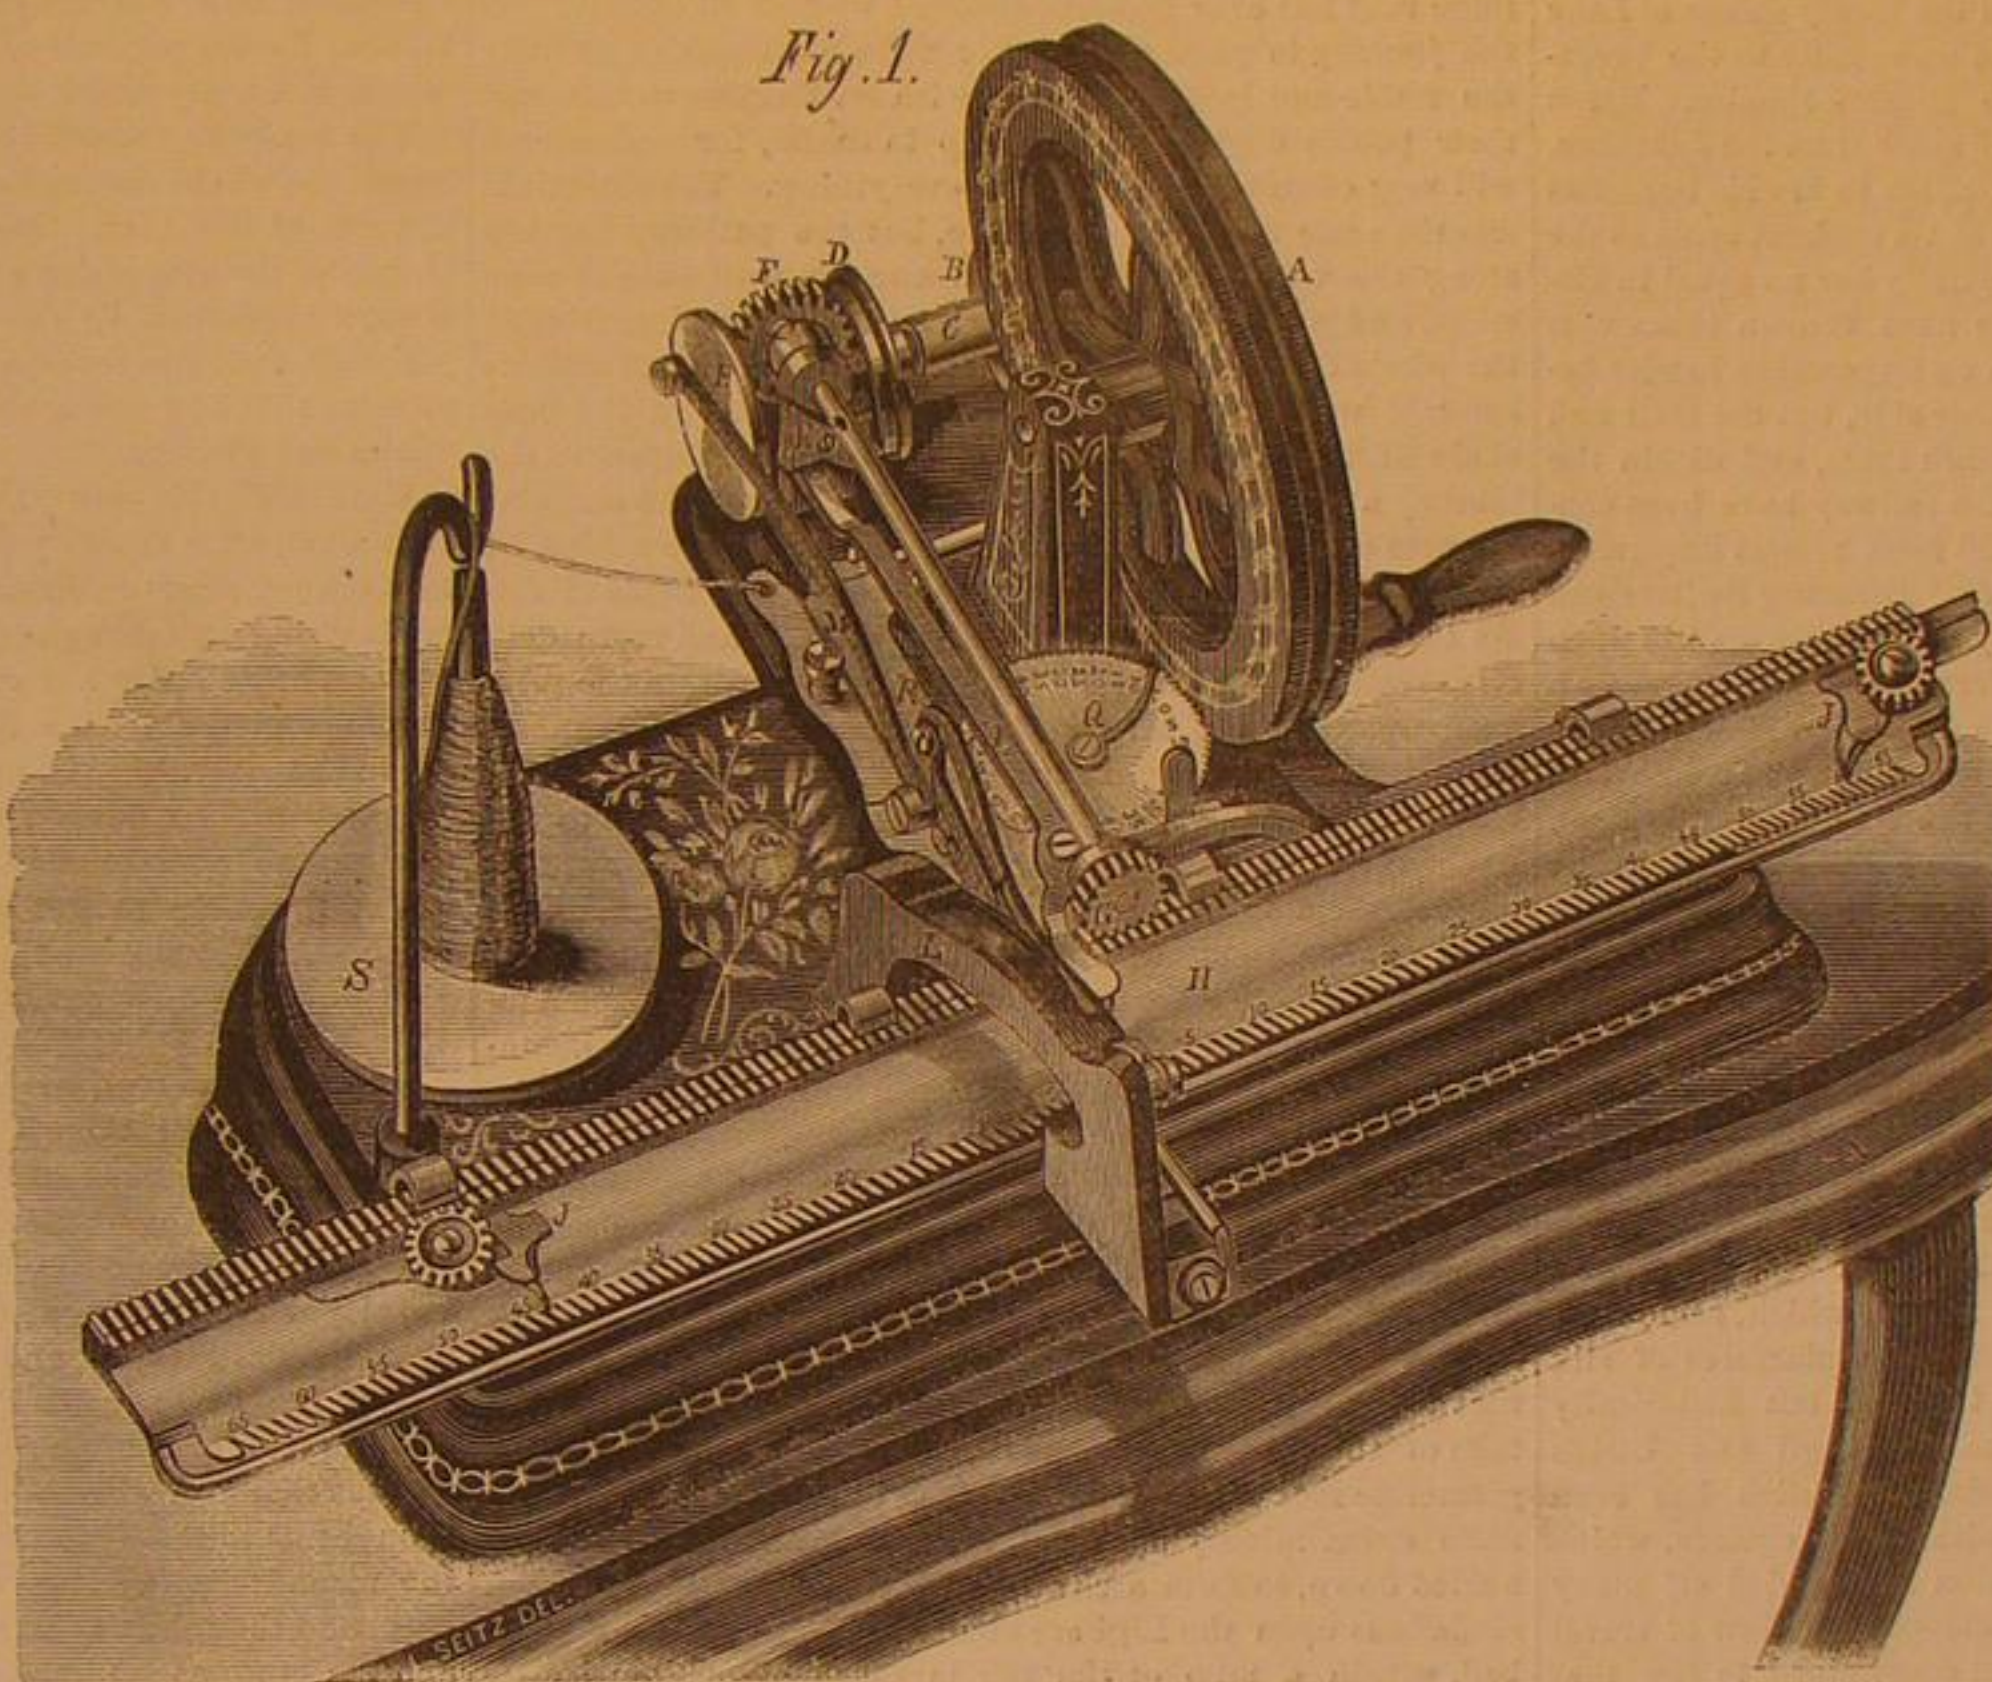

THE HINKLEY PATENT KNITTING MACHINE.

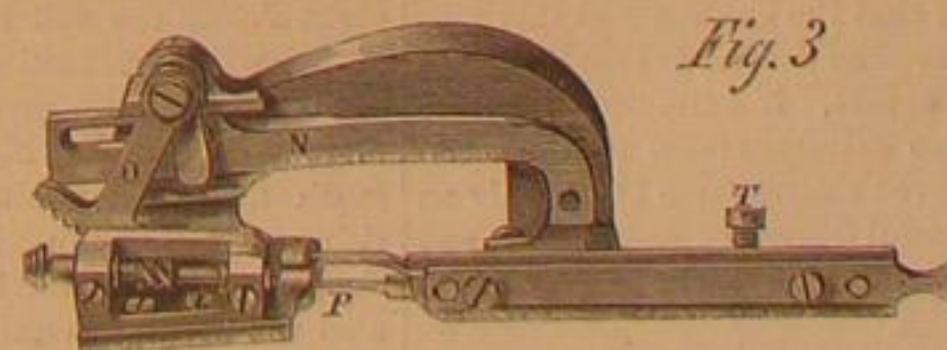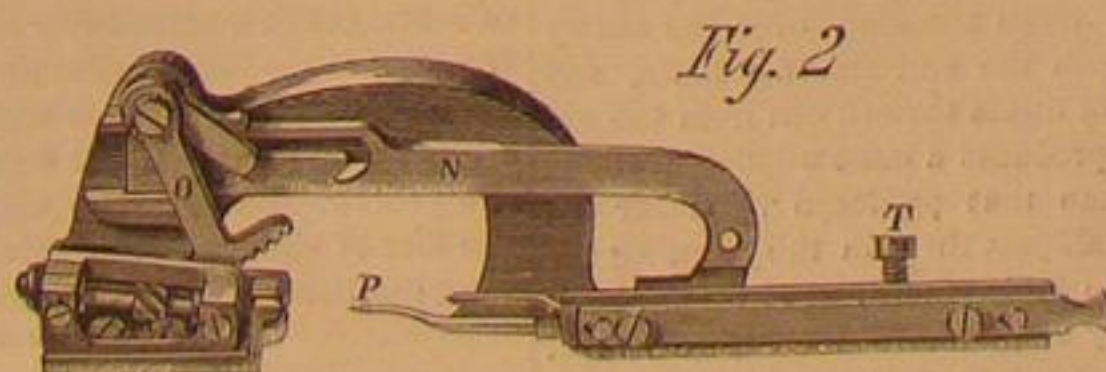

The work hangs from the teeth of the comb in front of the machine, in the plain view of the operator, and, unlike all other knitting machines, this uses no weights to drag down the work from the needles, thus requiring a different weight for each variety of work; here a small rod, seen under the comb, obviates their necessity. In Figs. 2 and 3, T represents the tension screw, which will regulate the yarn to be knit, close or loose. In one the looper and needle are in contact, as when the stitch is to be removed, and the other shows them receded from one another.

It will also be apparent, that by the use of a traversing comb, of any length, either straight, curved, or circular, that one needle performs the work previously requiring as many needles as the comb has teeth, that the "widening" and "narrowing" is adjusted, stitch by stitch, or as many as is desirable, in an instant, by sliding the indexes along the comb. By the arrangement of the "looper," taking the loop from the under side of the needle at each advance, and plac-

EDITORIAL CORRESPONDENCE.

From Germany to Italy over the St. Gothard—Swiss Towns, Mountains, Lakes, Glaciers, and Rivers

ARONA, Lake Maggiore, Sept. 10, 1867.

I suppose that no other country in Europe is so well known to tourists as Switzerland. Easy of access from Great Britain and all parts of the Continent, it is not surprising that so many travelers rush to this most wonderful region. It is roughly estimated that fifty thousand English people visit Switzerland during the months of July, August, and September, and I should judge that about one half of the whole number of visitors this season were Americans, some of whom are wonderfully expert at climbing Alpine heights, and in itinerating on foot over long fatiguing passes. The only ascents of Mont Blanc which have been made this season were performed by two gentlemen from New York. With the exception of some of the smaller mountains, the ascents of which are comparatively easy, I have contented myself with a view of the immense snow-capped summits from beneath, rather than undergo the peril and fatigue of undertaking to climb to their tops. Switzerland is literally a land of mountains, lakes, cascades, glaciers, and rivers, the charms and grandeur of which have inspired the pens of poets, philosophers, and sages, who seem never to weary of their ceaseless beauty and variety. Gibbon found a spot upon the lovely shores of Lake Lemano where he devoted himself in tranquility to the preparation of his great history of the Roman Empire. Byron watched the falling of avalanches of snow from the Jungfrau, and visited the gloomy prison of Chillon to fire his immortal genius, and Rousseau selected one of its choicest spots as the scene of his *Héloïse*, which sentimentally has no equal in European literature. Nature seems to have thrown these vast mountain chains together to form an impassable barrier between the countries that lie on either side, but the skill and ingenuity of man has broken through them, and within the last few years the high road and the railway have been constructed to penetrate where it would seem almost impossible for man or beast to thread their way. Entering Switzerland from the rich and populous old city of Bale, which lies upon the Rhine, the railway for a considerable distance traverses a flat country, and then commences to ascend the mountains by a gradient of 1 in 20; the Mont Cenis pass is 1 in 12. Several valleys are crossed on bridges, and the line constantly rises, until in some cases the trains run high above the picturesque little villages down in the valleys below. The Unter Hauenstein, which is two thousand feet high, is pierced by a tunnel over eight thousand feet in length, and serves as an outlet for the chief traffic between western Germany and Italy over the great pass of the St. Gothard. From the heights at this point the first view is had of the immense snow peaks of the Bernese Alps, and the traveler is conscious of having entered a land which combines more of grandeur and sublimity than any other spot of equal size upon the globe.

The next most important city is Zurich, which, aside from its agreeable situation and extensive manufactures of silk and cotton, possesses very little interest, but historically it is remarkable as the place where Zwingli and Ulrich began the reformation in Switzerland. Zurich has been sadly afflicted this summer by a visitation of cholera, which in spite of every sanitary precaution has carried off many of its inhabitants and effectually stopped the flow of travel in that direction. And here I feel constrained to say that amidst all these wonderful charms of nature which abound in Switzerland, there are also added some repulsive features which cannot escape the notice of travelers. In spite of the abundance of water which invites every inhabitant to observe the strictest degree of cleanliness, I should say as a general thing that the rural populations were quite as filthy as those of any other country I have visited. The *châlets* are constructed to shelter under the same roof men, women, children, cows, goats, pigs, and poultry, and the practice is very common, even among farmers near the larger villages, to form the compost of stable manure and household refuse in the front door yard, the odors of which, it seems to me, ought to arrest the attention of the sanitary authorities. I do not wonder that the cholera has this year visited some of the Swiss towns—the wonder is that it has not prevailed to a more fearful extent. If extremes in nature abound in Switzerland, so also extremes meet in the social life, for among the more improved classes there is not only an aristocratic pride but a wonderful degree of good order and cleanliness; therefore as a general rule there is very much more to admire than to condemn.

Of the many points of attraction in Switzerland, no spot possesses more interesting features than Luzerne. The town itself is old and picturesque and by no means particularly nice, but the lake and surrounding mountain scenery, together with the historic associations connected with the name of William Tell, all combine to render this place one of the most sought after in all the Swiss Cantons. The land side of the town is still protected by an ancient wall surmounted by watch towers erected five hundred years ago, and there are some quaint old bridges across the Reuss, one of which has a curious fresco of the dance of death, which represents how the grim monster indiscriminately took his victims of every age, rank, and station, during the visitation of the plague in 1409.

A carriage drive of an hour and a half leads to the rude old chapel which was erected on the spot where Tell shot the tyrannical Gessler. The drive to this chapel along the borders of Lake Luzerne is grand and lovely in the extreme. The roadway is skirted by cheerful Swiss cottages, usually of the first class, beautiful fields well covered with fine fruit and park trees, and in sight of the Rigi and some of the peaks of

the snowy Alps, which lift their white caps far above this most beautiful lake.

The most interesting object in Luzerne is the monument to the Swiss guards who fell while defending the royal family of France, Louis, XVI., Marie Antoinette and their children, when the infuriated mob attacked the Palace of the Tuilleries during the first French revolution of 1792. The design is by Thorwaldsen, and represents a lion of colossal size mortally wounded, with a broken spear in his side, endeavoring to hold in his paws the shield of the Bourbon family. The figure, 18 feet long and 18 feet high, is chiseled in the perpendicular face of a sandstone rock overhung by creeping vines and shrubs, and there is a small pond of water at the base of the rock supplied by a little streamlet that flows down the cliff, which forms a sort of mirror to reflect the image of the dying lion. The design of this monument is certainly unique, and when it is considered that these brave Swiss were hired soldiers and fell fighting for the royal family when assailed by their own subjects, it becomes most touching and impressive.

The ascent of the Rigi is made from the pleasant little village of Weggis, which is reached from Luzerne by steamer in about half an hour. It is very fashionable to ascend the Rigi; therefore almost everybody undertakes it, and I must confess that the toil and fatigue are amply repaid by the wonderful panorama that breaks upon the vision. No carriage road has ever been constructed up this mountain, but the journey is performed either upon horseback or on foot; the feeble and infirm, together with fat English women and their poodle dogs, are carried up in chairs, for such people will very often persist in seeing everything. The summit is less than one mile above the lake, but the pathway zigzags along the western slope of the mountain a distance of nine miles, and traverses gardens, fruit orchards, and pasturage the whole distance. The view of the lake beneath and its emerald waters, which always remain visible, and the long chain of the Oberland Alps that lie beyond, impart to the journey a constant and thrilling interest. One of the singular features of the Rigi, peculiar also to many of these Alps, is, that it affords pasturage for flocks of sheep and herds of cattle to its very summit. Nothing is sweeter and more delicious than these mountain grasses, which constitute the principal wealth of the neighboring inhabitants. As the snows disappear the flocks and herds gradually ascend the mountain, following the productions of spring, which rise to life under their feet from day to day, until the snows of autumn compel them to retire to the valleys below. There are upward of four thousand cattle, chiefly cows, and numerous flocks of sheep that feed upon the Rigi, and the herdsmen reside in rough little *châlets* all along up the sides of the mountain. About one third of the distance up a small chapel has been erected for the use of the herdsmen. Apart from the spiritual benefits which this place affords to the humble worshippers, there is also attached to it a shed where excellent beer is supplied to refresh the weary body. This combination of chapel and beer-shed is not exactly according to the rigid institutes of Calvin—who I believe was a Swiss—but I notice that the pilgrims of Mont Rigi are usually very glad to partake of the refreshment thus offered. Vast masses of conglomerate rock lay scattered all along the wayside, and during some extraordinary upheaval immense boulders have been hurled down, to form archways over the path. Hotel accommodations upon the Rigi are abundant. The best, the Kaltbad, within a mile of the top, is much frequented for its magnificent views and bracing mountain air, and many visitors spend weeks at this comfortable resting place. A smaller hotel stands a little nearer the top, and the Rigi Kulm, a house capable of lodging two hundred people, is perched upon the very pinnacle, and is always crowded during the season, chiefly by those who wish to spend a single night.

I noticed upon the register of this hotel that names were registered as early as March 22d and as late as December 26th. In some places the narrow bridle path runs along the edge of fearful precipices, and a single misstep would throw the traveler hundreds of feet into the dark abyss beneath.

The day of our ascent was cloudless, and we reached the summit in good time to behold a most brilliant sunset, and at eight o'clock the full moon came beaming over the snowy peaks, which, reflecting upon the surrounding lakes, and combined with the myriad of lights thrown out from the numerous villages and *châlets* produced a most wonderful effect, much finer to my mind than that produced by either the rising or setting sun. At half-past three in the morning the sleepers were aroused by the Alpine horn, and in a few minutes the house was hurriedly emptied of its occupants, men, women, and children rushing out to gain the highest peak, some with bed blankets thrown over their shoulders, some in morning gowns and slippers, all anxious to witness the rising of the sun, which is considered one of the chief features of this mountain view; and indeed the sight is well worth all the trouble it cost to obtain it, but frequently, owing to the fogs that gather about the summit, thousands go away disappointed. I met one old gentleman who had doggedly persevered ten days in endeavoring to see the sun rise, and finally had his perseverance rewarded. The panorama of the Rigi sweeps over a circumference of three hundred miles, and embraces a combination which in extent and variety is scarcely equaled by any other in Switzerland. The labor of supplying the wants of so many visitors is prodigious. The supplies are carried up chiefly upon the backs of mules, but trunks, valises, and other articles are carried upon the backs of men and women. It is not unusual to see one of these men with his wooden rack strapped upon his back, lugging one of those immense trunks which are nearly as large as the *châlet* that covers his head, and scores of lads are eagerly watching to carry the pedestrians' effects up or down, and it

is surprising how much they will undertake to perform. These people will sometimes make two of these trips in a day. The descent of the Rigi is most usually made on foot, as the exercise of riding down is not considered the most agreeable, and although not much of a pedestrian, by the assistance of an Alpenstock and an occasional draft of fresh milk, which is readily obtained at the wayside, I made the walk without much fatigue in three hours.

Lake Luzerne, or more properly the Lake of the Forest Cantons of Uri, Unterwalden, Schwytz, and Luzerne, which surround its shores, is unquestionably grander and more sublime than any other lake in Europe. It is completely walled in by stupendous mountains, with here and there a picturesque village, which seems to stand upon the accumulated debris which for ages has been washed down from the heights above. At one time, before roads were cut along the lake, one of these little villages boasted of being the smallest independent state in Europe, as its inhabitants, sheltered from assault, refused to recognize any other earthly government except their own.

At the upper end of the lake is the poor little village of Fluelen, where begins the carriage road over the St. Gothard into northern Italy. Dilligences leave daily for Bellinzona, 76 miles, but travelers who wish to enjoy the scenery of this great pass to advantage, must either take a carriage or perform the journey on foot. Preferring the former as the more agreeable and less fatiguing, we engaged an outlandish-looking Italian *vetturini* to transport us over to Lake Lugano, which is twenty miles beyond Bellinzona.

The roadway follows the tortuous windings of the river Reuss the whole distance clear up to Lake Lucendo, near the summit of the pass. Its waters rush through the wild gorges of the mountains at a fearful velocity, the effect being always heightened by the immense rocks that stand in its pathway, and the volume is augmented by the numerous streams that flow down the mountain sides from the melting snows and glaciers.

Until 1832 this pass was only made over a bridle path. At that time, after twelve years of labor, the neighboring Cantons opened a carriage road—one of the finest in Europe. The engineering in some places is of the boldest character. Side terraces or galleries are cut along the face of the granite heights, sometimes at a distance of nearly a thousand feet above the river. In the narrower gorges it was necessary to let the workmen down from the top of the mountains by means of ropes, to enable them to drill and blast into the face of the rocks to get a foothold to work a tunnel underneath. And thus ascending, we reach at length

"The Gothard's heights, where everlasting lakes,
Fills'd from Heaven's fountains, supply the streams below—
Another river, issuing thence, will guide
Thee into Italy, thy land of promise."

At the summit there are two common hotels, some peat beds, five St. Bernard dogs, and several little lakes of clear water, from one of which rises the river Ticino, which accompanies the tourist on his journey to Italy, down through the awful Val Tremolo, so deep that snow lays in midsummer upon its dark edges, and the roadway descends from this fearful height by abrupt zigzags, which coil along the steep slopes like the folds of a huge serpent basking in sunlight.

I was thankful when we had rounded the last curve that brought us to the little village of Ariolo, where we rested for the second night. Here everything has an Italian appearance, and though it is many miles from Italy, the language and the customs are Italian. Owing to the existence of cholera in Italy, we were compelled to obtain a certificate from the Syndic at Faido that we had come from the mountains, but this did not save us from suspicion; therefore, upon arriving at Lugano, at ten o'clock at night, our carriage was stopped and we were invited to walk into a small room and undergo the agreeable process of fumigation; and upon leaving Lugano the next day for Lake Maggiore, and before crossing the frontier into Lombardy, we were again entertained at "Hotel Fumiger." People coming up from Italy were required to quarantine for a few days before being allowed to proceed.

Many years ago I remember to have read a graphic description of the sensation of gloom experienced by the writer, of midnight in a ruined city and upon the lonely desert, but it seems to me that almost anything would be preferable to the awful dullness of this region. Hotels, streets, carriages, steamers all deserted, and a general melancholy hangs about everything. Such is the effect upon a people oppressed by the fear of cholera. The skies, however, are bright, and the vine, mulberry, and the fig grow luxuriantly. S. H. W.

Gatling's Gun in Europe.

A French journal announces that the Ordnance Department of France is quietly supplying Gatling's Gun to the artillery corps. The Press of Vienna says: The artillery committee, in presence of the Archdukes William and Regnier, as well as the Minister of War and a large number of officers, has just made some experiments with a new firearm, which has been called the *mitrailleuse*, invented by MM. Montigny and Christoph of Brussels. This weapon is composed of 31 steel barrels placed in a common tube. The apparatus opens behind and receives 31 cartridges which, by means of a piece of mechanism, enter the barrels. The 31 shots are fired successively, and the whole operation only takes 30 or 40 seconds. The experiments were not successful; many of the shots missed fire, and very few went straight. The *mitrailleuse* appears very inferior to the cannon on the Gatling system (American). The latter fires 100 to 120 shots a minute, and the former only 60 to 70. Messrs. Gatling, moreover, have much improved their cannon, and before long are going to submit to the Austrian Government a ten-barrelled revolver cannon which will fire 300 shots a minute.

A NEW THEORY OF CHEMISTRY--THE GALVANIC BATTERY DISSECTED, AND SPECULATIONS CONCERNING OZONE.

At the meeting of the New York Lyceum of Natural History on Monday, 14th inst., a paper was read by Prof. Charles A. Seely, of this city, on "Chemical Dynamics." We present below the principal features of the communication in a condensed form.

In recent treatises on chemical physics may be found tables of the calorific equivalents of various elements. These tables show the amount of heat evolved in the union of various pairs of elements. This heat is commonly known as the heat of combustion. One gramme of hydrogen (H), burning in chlorine (Cl), evolves 23,783 units of heat. This amount of heat involves, indicates, or represents a certain definite amount of force which was used in its production. This force has been designated chemical affinity, and is often supposed to be a species of attraction. The heat of combustion is a measure of chemical affinity.

The heat of combustion has been supposed to be the result of a collision or clash of atoms; the atoms are brought together by an attractive force, and on the collision, the movement takes the form of heat. Is affinity an attractive force, and does it obey the laws of gravity, and other forces of attraction? Is affinity proportioned to mass, and does it vary inversely as the square of the distance? Attraction implies condensation, a phenomenon which does not necessarily take place in chemical unions, and if affinity were like gravity, the force being proportioned to the mass, the ordinary numbers of the chemical equivalents would express its distribution among the elementary atoms. Can the force which the heat of combustion represents be divided among the atoms, and if so, what is the portion of each? Of the 23,783 units of heat involved in the combustion of H in Cl, how much was due to the H, and how much to the Cl? What is the potency equivalent of H, and what of Cl?

It has been found by experiment that if three metals, A, B, and C, be so related that A is capable of displacing B and C from their combinations, and B is also capable of displacing C, the heat developed by a substitution of A for C will be exactly equal to that developed in the substitution of A for B, together with that developed in the substitution of B for C. From this and other similar facts, the author infers that each free atom is endowed with a definite and constant potency, which exists in it as a latent force, and which assumes the form of kinetic or effective energy only in the act of combination, when it appears, and is measurable as heat. The author has constructed a table of atomic potencies by the following process: Let A, B, and C, be three elements, and let their respective potencies be represented by x, y, and z, expressed in terms of heat units. Then from experimental data we have $x+y=m$, $x+z=n$, $y+z=o$, from which the values of x, y, and z, are easily determined. The numbers, however, thus obtained, as true representatives of the dynamical value of atoms, are not altogether satisfactory or consistent with each other. The available experimental data are, at the present time, insufficient in amount and accuracy for a determination of numbers with that exactness which is demanded by scientific men. But a study of the table in its imperfect form suggests entirely new paths of research, and will assist in the comprehension of facts already known.

As an example of the application of this dynamical theory, the following illustration will suffice: In the union of H and Cl, the potency or energy of the atoms appears and escapes in the form of heat. After the union, they remain together by virtue of a sort of atomic inertia. To decompose the HCl (hydrochloric acid), the lost potency must be restored; the decomposition involves the same amount of force as the original act of union. If zinc (Zn) be added to HCl, and takes the place of H, then Zn must give up its potency, and H must resume as much as it lost in the original union. The H is eager for that which the Zn seeks to give; the force passes directly from the Zn to the H, and the Cl is throughout impassive. It happens that Zn has an excess of potency above the H, and this excess escapes with the H in the form of heat. This view of the case is well confirmed by experiment.

Again: suppose a plate of Zn and of platinum (Pt) be immersed in hydrochloric acid, a condition of things which may be represented thus: Pt, H Cl, H Cl, H Cl, Zn, and which, moreover, is a type of a voltaic circle. The Zn being pure or amalgamated, does not combine with the contiguous Cl. But yet there exists an affinity between them. Also, there is an affinity between the Pt and the contiguous H. There is a pull on all the Cl toward the Zn, and of the H toward the Pt. Moreover, the H at the right is held in a sort of suspension between the atoms of Cl on each side of it. The word polarization well expresses this peculiar relation of the atoms. The Zn is on the point of giving up its potency, and the H contiguous to the Pt is ready to receive it, but there is no path between the two which the potency can take. Now, in this condition of affairs, let the Zn be connected with the Pt by means of a metallic wire, and the potency of the Zn passes over to the Pt, and through the latter to the contiguous H, which now assumes its elementary form. The Zn being freed from its potency, unites with its neighbor, Cl. The passage of the potency along the wire is what we call electricity. The excess of what the H needs to exist as an element, takes the form of heat and escapes, and it is this excess which measures the amount of useful work which can be obtained from a battery in practical operations.

If this electrical theory be true, it appears that there is but one kind of electricity, and that in the battery it moves only through the wire, and not through the liquid. It will be observed it is from the Zn to the Pt, while the old theories make the course of the so-called positive current in precisely the opposite direction.

The author here gave an interesting speculation concerning ozone. It has recently been determined that ozone is an allotropic form of oxygen, differing essentially in the fact that it has a greater specific gravity. Oxygen, in separating from a compound, rises to its ordinary form by two lifts or stages. First as ozone, then as oxygen, the latter containing and requiring an addition of potency. The battery, therefore, which is economical of its force, sets free the oxygen in the decomposition cell only as ozone, and thus it escapes; the potency which is required to raise the ozone to the form of oxygen must come from other sources. When oxygen is set free from combination at a temperature below 300°, it probably always takes the form of ozone. Also, it is likely that the hydrogen escapes in a condensed form on the surface of the platinum, and provided as much of the energy of the battery is taken away for outside work as possible, the hydrogen takes up heat from the platinum and the solution which it needs to exist at the ordinary tension and temperature.

If this theory should prevail after it has been submitted to the scrutiny of the scientific public, it will bring about a radical change in our notions of chemical phenomena. It reduces chemistry to a branch of mathematical philosophy, and makes properties and changes of properties of matter, only cases of positions and motions of atoms.

Correspondence.

The Editors are not responsible for the opinions expressed by their correspondents.

Cipher Writing--A Universal System.

MESSRS. EDITORS:—So much has recently been said in the columns of different newspapers throughout the country on the subject of "Cipher Writing" and "Deciphering," I have made bold to request a limited space in your valuable sheet for the purpose of ventilating a few ideas of my own on this much discussed question. The late comments on this subject have arisen partly from a story recently published in *Blackwood*, in which cipher writing is indulged in by one of the characters, and the art of deciphering by another. The story itself is not pertinent to the question, other than the remarks of the hero in explaining his theory of the art of deciphering any written words in cipher, and he is not the only one who has asserted that any written cipher can be deciphered, and this belief has spread itself through hundreds of newspapers influencing their thousands of readers. As a late editorial justly remarks, "If the whole system of cipher writing can be unlocked by other means than the key, its extension and use as practiced at the present moment by thousands of business men and others in the transmission of valuable telegraphic dispatches regarding stocks, gold market, merchandise, police matters, and the secret business of the general government, is of but little account, and anything but a safe medium to transact business requiring absolute secrecy, from all but the person or persons intended, and may account for some strange developments in civil as well as military life." Now, all this may be true as applicable to any ordinary system of cipher; and the writer in *Blackwood* is undoubtedly correct in his explanations of how to decipher any cipher writing in common use; but I must beg him to make one exception in favor of a system of "ciphers" of my own invention, that I am confident will baffle the keenest wit that ever lived to decipher without the key. It is the simplest of all ciphers, because it requires no written key to understand. The key is carried in a person's mind, and can't be forgotten, because of its perfect simplicity; or it may be varied at pleasure, and the key be found anywhere in the Christian world, but useful only to those for whom the cipher may be designed. Another feature about this system is, that no matter how extensively its principles might be understood, any two or more persons could intelligently understand each other either by letter or telegraph, without the least danger that others in possession of its secret workings could be any the wiser had they years to study an intercepted sentence, unless it was so designed by the person sending the sentence, for the reason that it is susceptible of an infinite number of curious variations. I will now, with your permission, give a short sentence in this queer cipher, with the English of it underneath, and following which I will give a second sentence in the same cipher, and invite the most astute wit to decipher the second line, although with an example before him, each cipher rendered into English, and containing almost every letter of the alphabet—at the same time assuring all that the second line is as simple and easy of rendition as the first: and, though it may not seem so, yet is deciphered by the same key as the first line, when in the hands of one who not only understands its principles, but for whom the sentence is designed:—

Cipher—2 3, a, 44 9 6 4 1 2, B, 27 15, C2, B, 2, a13 13 14 15, C1 6 3 7 4, D11, G2 10 3, I30 6 26 4 25 10 26 31, H1 2, I1 30 31 3, K5, I, 30 10 11, K5 7, M5, K1 3 4, I29 10 30, 6 7 a38.

English of above—"Washington came first—just, virtuous, brave, devoted, kind, loving."

Sentence to be deciphered—2 4 a1 3 25 23 5 27 13 13 17 16 7 7 9 38, E, 34 30, F9.

A glance at the above lines will show that the ciphers in the first line, with their English letters to correspond, do not make sense when applied to the second line, and herein is the mystery. On counting, the reader will find three more figures in the first line of ciphers than there are English letters in the explained sentence; and I will so far explain as to state, that the ciphers, 2 3, a, do not belong to the sentence, properly speaking, but are explanatory of the key—the first proper cipher letter is the figure 44, which stands for W. Now, let some of the readers of the *Scientific* try their skill at the last sentence, and give a satisfactory elucidation

of it, and the proper key if they can, and, when all have failed (as assuredly they will), I will, with your kind permission, in another issue, make the whole matter as plain as daylight, and furnish a cipher that will baffle detection.
Troy, N. Y. C.

How to Manage Kerosene Lamps.

MESSRS. EDITORS:—I herewith communicate my "say" on the "Kerosene Lamp Question," which is founded on experience and actual experiment.

If the brass-work, cone, etc., is heated unusually hot, it will cause gas to generate in the lamp, which, as it produces pressure, will force itself up through and around the wick and ignite, causing the lamp to sputter, and even snap itself out. Now if, when it is "sputtering" the brass-work is cooled off, for instance, by wrapping a wet cloth around it, the lamp will cease sputtering and snapping and burn as it should.

An examination, while operating as above, will generally reveal charred and saturated wick burning around the base of the wick tube, or the flame of the lamp may impinge on the cone, owing to its being slightly turned or the wick having a ragged corner, causing the brass to heat and generating gas. Low proof oil, forming gas at a low temperature, is consequently more unsafe to use. If the wick fits the tube properly, blowing down the chimney is the best way to extinguish it, for the following reasons:—It is perfectly safe, the wick need not be trimmed for several days, thus obviating the necessity of regulating it every time it is lighted. A slight puff or a gentle flirt of the fingers across the top of the chimney, in an upward, slanting direction is all that is necessary. A tremendous and badly aimed blast is generally used, where a mere puff would suffice, if properly directed.

If the wick fits the tube, it is impossible to drive the flame down into the lamp by blowing into the chimney.

EXPERIMENTER.

Port Henry, N. Y.

A Proposed Flying Machine.

MESSRS. EDITORS:—I have heard whisperings of flying machines and other novelties of late—whether proceeding from Mr. Glaishere's new society, "in nubibus," I cannot say—but if anything of this kind is to be accomplished, my impression is we shall hear of it first from our side of the water; and, if you will permit me, I will give a brief outline of an idea that has occupied my mind, and which may be worthy the attention of parties interested, on taking to themselves wings. It seems hopeful to me, that, as we can support our bodies in the water, by two inflated bladders fixed across the chest, and over the shoulders, leaving our arms free for all necessary movements, so we might, in like manner, suspend ourselves in the air by the aid of a small elongated balloon filled with hydrogen gas, attached by a light frame of cane or wicker work fitting to the figure, and secured by strappings of stout linen, leaving the arms at perfect liberty to work the wings or other contrivances for progression and guidance—the wings made of strong fine silk, smoothly stretched over whalebone frames, capable of extension and retraction at pleasure. But in order to facilitate the operations of the wings, certain mechanical movements will be needful; and these I would propose to inclose in a kind of cuirass of the lightest of metals (aluminum), closely fitting to the chest, and which the arms and hands can completely command. The hydrogen gas is easily obtained from refuse iron and sulphuric acid, which can afterward be converted into a green vitriol. Experiments at trifling cost can be made to ascertain the volume of gas and size of balloon required to poise the body safely and easily in the air; and I am very sanguine that the success of progression and steering will eventually be perfected by some one of your clever correspondents.

I dare not trespass further, either on your patience or your waste basket, as that may be. Fluttering about over the chimney pots, on gaily gilded wings flashing in the sun, will be a pretty sight; but mounting over high precipitous rocks or rivers, would save our thaws and sinews, and, may be, our lives; and one apparatus would be of easy conveyance and of small compass.

For reconnoitering and prospecting purposes I think this plan might answer well.

THOMAS INGLE.

The Vellella, Ensworth, Hants, Eng.

A Correction.

MESSRS. EDITORS:—I perceive that owing to a mistake in copying, a serious error occurred in the article, Volumetric Estimation of Barium page 244 of issue of Oct. 19, the sentence reading: "If a crimson coloration is produced add liquid from the burette until only a slight crimson tint is produced;" should have read: If no coloration is produced, cautiously add liquid from the burette until a crimson tint is perceived on testing with nitrate of silver in the manner described. Please insert this in your next issue and oblige,

GEO. H. MANN.

Troy, N. Y.

That Big Saw Again.

MESSRS. EDITORS:—I notice a communication in Vol. 17, No. 13, of the *Scientific American*, dated Sept. 18, 1867, under the signature of Lamar Foss. Your correspondent attributes to me a statement which he cannot show in any written or printed paper from me viz.: "that a 15 horse power will drive a 53-inch saw of my make as hard as it can be driven." I have never made any such statement.

Forty horse-power can be expended in running a 53-inch saw of my make and the saw can be made to cut 40,000 feet of inch lumber in ten hours with that power. Furthermore, I am prepared to demonstrate by actual trial that with a twenty horse-power well applied and a saw of my manufac-

ture well kept in order, I can saw 25,000 feet of inch lumber in ten hours from good clean pine, poplar, or hemlock. In the hard, gnarly native timber of Connecticut, or in the muddy, gritty timber so often floated there a saw cannot be expected to work to one half its capacity.

What some men call 15 horse-power will not rate 10 horse-power taking into consideration the way it is used; i. e.: the horse-power as estimated by Watt, 33,000 lbs. raised one foot per minute. I have seen steam engines and boilers rated at 40 horse-power that were so miserably set up and worked that 10 horse power could not be obtained. The quality of fuel generally used in saw mills will not generate the greatest amount of steam, and consequently greater heating surface is required in the boilers or there is a deficiency of steam. Among the various kinds of water wheels in use, many are greatly over-rated in power. Judging from my own experience not one power in fifty, either steam or water, is ever tested; it is nearly all guess-work.

At Sandy Lake, in Mercer county, Pa., is a mill which I erected and in which I put the first of my saws ever run this side of the Rocky Mountains. The size of boiler is 12 feet long, 3 feet in diameter, two 12-inch flues; the engine, 7-inch cylinder, 10-inch stroke. I never carried over 90 lbs. of steam. No one would rate that engine over ten horse-power. The mill has an upper and lower saw 56 and 42 inches in diameter, and sawed the first year over 2,000,000 feet of lumber running only 10 hours in the 24, and has sawed more than 1,000 feet per hour of inch boards.

I am prepared to prove to your correspondent my assertion, viz.: a mill will cut 1,000 feet of inch lumber to the horse-power in ten hours. I assert that a 15 horse-power properly worked with a 52, 54, 56, or even a 60-inch saw will drive the saw to do a good business. Much, of course, depends on the quality and condition of the timber. J. E. EMERSON.

Lifting Pumps and their Pipes.

MESSRS. EDITORS.—On page 211 current volume, Mr. Wm. Edwards says your answer to A. T. of Kansas was erroneous; assuring your Kansas correspondent at the same time that "a pump in such a situation would suck water considerably more than 23 feet." With proper qualifications the assertion is true, but under ordinary circumstances it will not work.

I have made pumps, and experimented frequently with reference to the proper length for suction pipes; my conclusions are that unless the channel or bore is enlarged as their length is increased they will not work when 31 feet long, which would be the length of A. T.'s suction unless he continued his eight feet depth dug at the mill to the river bank. Add to his 31 feet height 100 feet length and he would have 131 feet suction pipe. Dig a channel from the mill to the river and his suction pipe would then be 123 feet long; under ordinary circumstances neither lengths would work. Suction pipes of pumps are usually made with a 2 inch bore. In a length of 123 feet the friction against the sides in consequence of the rapid flow of the water through the long narrow channel would be so great as to stretch the water out into a very meager stream, or breaking with a loud report before it reached the valve chamber, defying the most ingenious to make it work without an increased bore. But, make the bore of the pipe say 4 inches for the upright part and 3 inches for the horizontal length, with joints perfectly air tight, and in my opinion the pump will work satisfactorily and Mr. Edwards' assertion be true. J. W. Shaffer.

Sterling, Ill.

If our correspondent will again refer to the page and paper to which he calls attention, and read carefully the article on which the criticism is based he will find that the advice there given is suitable for him and that the position of this paper is correct.—Eds.

Paris Academy of Sciences.

At the last sitting a paper was received from M. Soret on solar radiation. The actinometer he uses consists of a thermometer with a blackened bulb, and enclosed in a blackened box. The latter is pierced with a hole two centimeters in diameter, admitting a ray of light which falls on the bulb. The temperature of the thermometer continues to rise until it loses by radiation or by the action of the ambient air as much heat as it receives from the sun. In order to protect the thermometer from the influence of extraneous warmth, the blackened box is surrounded with melting ice. From a series of observations made with this instrument it appears that the moisture of the atmosphere influences the intensity of direct solar radiation; and in general, other circumstances being the same, the more aqueous vapor the air contains, the less intensity there is in the radiation of solar light. Radiation increases with altitude, but its increase is less rapid than the fall of the barometer. The density of the atmosphere being the same, the radiation observed at a great altitude is undoubtedly stronger than at a lower one, and the diminution of radiation as the sun inclines towards the horizon is much less at a high altitude than in the plains.—M. Robt sent in an article on chloride of lime, showing: 1, that all acids displace hydrochlorous acid in liquid chloride of lime; 2, their action ceases then if the hypochlorous acid set at liberty is not in contact with hydrochloric acid or some oxidizable acid; 3, that if the contrary is the case, chlorine is evolved; 4, and that at all events hypochlorous acid exercises no action on chloride of calcium. In a paper on the electric spark, M. F. Lucas calculates that while the voltaic focus now used for lighthouses is equal to the light of one-hundred and twenty-five Carcel lamps a solitary electric spark, having but an apparent intensity of one-two-thousandth of a Carcel lamp, would be seen from a greater distance than the voltaic light above alluded to. He therefore recommends the periodical discharge

of strong batteries of Leyden jars instead of the permanent lights now in use.

American Champagne in France.

One of the most interesting manufactures of the American Department of the Paris Exhibition is that of the still and sparkling wines, colored and uncolored, which are exhibited by a score of American wine manufacturers. These wines, after being tested by the best judges, have been pronounced worthy of being compared to the most prized productions of France. These sparkling wine comes near to the champagnes of the best marks—"Reims," "Epernay," and "Chalons"—and this American manufacture is coming strongly into competition with our own products in the markets of the new world. The grapes which yield this product are the Catawba, the Isabella, the Delaware, the Diana, the Virginia, the Seedling, etc. Six specimens of these sparkling wines have been pointed out by the jury. In the first line stand the samples of Messrs. Werk & Sons, of Cincinnati, Ohio. We understand that in their wines the best qualities of grapes and finest of crystallized sugar are used, and the same skill employed as in the manipulation of the best manufactures of France. Messrs. Werk, being natives of France, are acquainted with all the minutest details in the cultivation of grapes and the production of wine. The elder Mr. Werk was one of the first promoters of this branch of industry in the United States. Their vineyards are located near Cincinnati.

[We translate the above from *L'Invention*, an excellent monthly journal of science, published in Paris by Charles Desnos. We are much pleased to record this strong commendation of a comparatively new branch of industry in our country, but which has already become very important. There is no good reason why we should depend upon European nations for our supplies of wine, and we think the importation in this branch must gradually decrease, although statistics show the consumption to be greatly increasing. Eds.]

Shell Cameos.

The shells employed for cameo cutting are the *cassis rufa*, and several species of *cyprea*, called cowries. They are dense, thick, and consist of three layers of differently colored shell material. In the *cassis rufa*, each layer is composed of many very thin plates, or laminae, which are perpendicular to the plane of the main layer; each lamina consists of a series of elongated prismatic cells, adherent by their long sides; the laminae of the outer and inner layers are parallel to the lines of growth, while those of the middle layer are at right angles to them. In cowries there is an additional layer, which is a duplicature of the nacreous layer, formed when the animal has attained its full growth. At the London Exhibition there was a very fine collection of shell cameos, from Rome, owned by the engraver Seculine. Certain natives of India prepare shell cameos with rude but efficient instruments for cutting them, and the Indian department in the Exhibition showed numerous specimens.—Dr. Feuchtwanger.

A Cement for Iron and other Substances.

A correspondent asks, "What is the best known substance for sticking sheepskin to iron?" We reply, that any fibrous material can be "stuck" to metal, whether iron or other metal, by an amalgam composed of glue dissolved in vinegar, hot, with one-third of its volume of white pitch pine, also hot. The composition will give a sure and certain return.

Editorial Summary.

ELEMENTARY EDUCATION IN FRANCE.—One third of all the inhabitants of the French Empire are unable to either read or write. This unwelcome fact has just been forced upon the attention of the enlightened among that nation by the publication of two maps entitled "France that can read, and France that can write." In the latter, the districts in which persons married in 1866 who could not sign the registry—in a proportion varying from thirty to seventy per cent—are marked in black. Fifty-five departments thus denounced comprise all the south, center and west of France. The averages of the illiterate married in 1866 is thirty-three per cent. As regards primary instruction France accordingly is in the lowest rank of the European powers.

TAILLESS CATS.—A correspondent in Sudbury, Mass., informs us of the existence of a race of felines in that vicinity all of whom are destitute of caudal appendages. Tradition ascribes their origin to a farm where many rabbits were kept, and a mixture of races was the consequence. In confirmation of this Darwinian idea our correspondent asserts that the tailless cats of the present generation have the crook of the legs and the jumping gait, characteristic peculiarities of the rabbits. A frightful mortality in every litter of these curiosities tends to prove that by an unnatural effort nature has produced this mongrel race. The generous offer of our correspondent for an editorial cat of this family is gratefully accepted.

WHOOPING COUGH INFECTIOUS.—M. O. Poulet read at a late meeting of the French Academy a paper with this title, in which he stated that during an epidemic of whooping cough which prevailed in his neighborhood, he found in the air expired by a number of children suffering under it, a vast number of infusoria, identical in every case, and which had the property of communicating the disease to persons inhaling them.

PROFOUNDLY IMPRESSED.—It is reported that during the visit of Abdul-Aziz to the Paris Exposition, he inspected the greatest triumphs of science and art with an air of dignified repose, which was in fact the stupid tranquillity of ignorance. The only thing in the building that caused a smile of intelligence to pass over the Sultan's face was a punching machine in full work, and when told by his interpreter that it was capable of administering one thousand punches a minute, he replied with decided animation that he would take one home with him for the benefit of the heads of those who had persuaded him to leave Turkey.

THE Aeronautical Society of Great Britain contemplate holding an exhibition in May, 1868, of machinery and apparatus relating to objects of an aeronautical character. There are several expensive designs for the accomplishment of aerial transit at this time under construction. It is proposed to offer a prize to any aeronaut starting from any part of continental Europe who shall reach England in a balloon nearest to a given point without replenishing his gas at any time during the days of reception allowed for articles of exhibition.

ANOTHER NEW MOTOR.—An English patent has just been issued for an invention for employing gaseous hydrochloric acid to work on a piston and to produce motion. The gas is evolved from its solution by means of sulphuric acid and after it has done its work it is condensed by transmission through water, then, being liberated from the water by evaporation, it may be used over again any number of times. The parts of the apparatus with which the gas at any time comes in contact must be made of, or coated with glass, to prevent corrosion.

MUSICAL ANTHROPOLOGY.—M. Ketis, of Brussels, has collected an immense amount of documents on the music of the greater number of modern nations, which have enabled him to divide them into several well-defined groups. From the models of flutes and lyres furnished by the pictures on Egyptian and Assyrian monuments, he has constructed instruments with which he has been able to revive musical systems buried for thirty centuries. He hopes from these systems to distinguish races as they have been previously recognized by languages; only less precisely.

THE REMEDIAL PROPERTIES OF GRINDSTONE GRIT.—It is a common notion that the grit of the grindstone has some wonderful quality of healing which does not obtain with the sediment of ordinary stones on which iron is not used, as millstones. There is reason in this opinion, as the *debris* of the grindstone is a mixture of silica and ferruginous oxide. The healing properties of the *debris* of the grindstone lie in the oxide of iron, which, in this form, in some diseases is worth many medical prescriptions.

COMPASSES FOR IRON SHIPS.—The late M. Evan Hopkins has proposed a new plan for remedying the deviation of the compass needle in iron ships, his object being first to neutralize or destroy the polarity acquired by the iron ship while building, and removing the compass from the sphere of attraction exercised by the iron of the vessel. A horseshoe magnet is to effect the first object, and elevating the compass to a sufficient height is to accomplish the other. He proposed to place a reflector near the elevated compass, in such a way that the card may appear like the face of a clock, and be capable of being read at the distance of twenty feet from the helm.

POISONING BY PHOSPHORUS.—M. Dybkowsky, in a recent memoir states that the poisonous action of phosphorus is entirely due to the formation of phosphoreted hydrogen gas, which, in passing into the blood, rapidly combines with the oxygen present. Hence he concludes that death from phosphorus is nearly equivalent to death by asphyxia.

A COMIC PAPER called the *Philosophe* recently appeared on the streets of Paris with a large portrait of Bismark, representing him as an ogre in the act of sharpening a knife to devour little children. The sale was prohibited and the police seized all they could find. Bismark is not much loved in Paris, but he is more feared than any other man in Europe.

CORRECTION.—In our answer to H. L. W. of Pa., on page 263 No. 17, present volume SCIENTIFIC AMERICAN the matter reads that the grate surface of a boiler per horse power is "six square inches." It should have been "half a square foot," a mild difference of only 66 square inches.

SPONTANEOUS COMBUSTION.—A fire recently occurred in the woolen mills of Messrs. Annens and Minot at Elbeuf, France, which was caused by the spontaneous combustion of a heap of refuse wool impregnated with oil. The SCIENTIFIC AMERICAN has frequently warned manufactures of this source of danger.

PLAYER'S PATENT HOT OVEN, illustrated in our paper a few months ago, has been put into practical operation in this country with great success by Horace L. Brooke, of Baltimore, Md. The use of this oven is said to effect a clear saving of \$10 a ton in iron smelting.

DR. R. J. GATLING, inventor of the celebrated Gatling gun, sailed for Europe on steamer *Pereire*, Oct. 19th.

American Toys, where Made.

A writer in the *Commercial Advertiser* has been investigating the business of making various kinds of toys, with the following result:

"The tin toys used in this country are now nearly all made in Meriden, Conn., where large quantities of tin household goods are also manufactured. It occurred to the makers of these latter that their scraps could be advantageously used for toy objects, and with the advantage of labor-saving machinery, they have driven their German rivals from this market.

Wooden toys of the less fragile kind are largely manufactured in several Connecticut towns. These consist of children's wheelbarrows, drums, rocking-horses, carriages, carts, blocks, rail cars, hoops, sleds, etc. Many of these objects are also made in this city and Philadelphia.

The new sensation toys, as the dancing negro of a few years back, and the present returning ball and Quaker pop-gun, are all made here. The patentees of these articles are said to have made fortunes. The railroad train and several other new toys, in great demand when first presented, have also been mines of wealth to those who patented them. The red india-rubber balloons are made in France, and filled here with gas. They are by no means strong, and the gas soon escapes.

Pewter toys, comprising soldiers, landscapes, trees, etc., are now largely made in this country, and though many are yet imported from Germany, their manufacture continues to be a profitable branch of business. New York monopolizes much of this industry. An Italian firm during the war realized a considerable sum by the manufacture of toy tea cups and saucers, the chief material of which was lead.

The stuffed bodies of dolls are made in New York, Boston and Philadelphia, as also the arms; but Germany still sends many. The arms of stuffed dolls are an especial article of commerce. They are not, like the legs, attached to the bodies, but are sold separately. Families will often make the bodies and legs for their children, but buy the arms on account of the difficulty of making fingers. The heads are likewise purchased, and are either of French porcelain and finely featured, of German china or papier mache, of English wax, of American india rubber, or of a new imitation of papier mache lately patented in Philadelphia. This latter is of thin layers of muslin, coated with oil paint, which has the advantage of washing without injury and is exceedingly strong, though by no means of fine finish.

India rubber hollow toys of every description, except balls, are said lately to have dropped in sale. Grotesque birds and men that squeaked when squeezed, seem to no longer to charm by their music.

The india rubber dolls' heads, lately much in use, are superseded by the new Philadelphia article spoken of.

Large mechanical toys, such as velocipedes, imitation steam engines, steamers, etc., are made here; as also kaleidoscopes. A negro jig dancer, propelled by steam, is the latest Yankee notion. A kerosene lamp heats a small brass vessel full of water and shaped like a top. It revolves in its socket, and moves a wire which communicates with the figure.

Aside from those we have mentioned, and a few others, most of the objects seen in a toy store still come from Germany. Children are largely employed in their preparation there, but American children go to school. It is surprising at what an early age German children are availed of in this respect. At six years, there, certain simple duties are performed by them upon portions of toys. Farmers of two or three acres employ their entire families in toy making during the winter months. The result of this labor is seen in Noah's arks. A youngster of very tender years paints the bodies of Noah's family and the animals with one color, and another child, a little older, dots the artistic countenances, or daubs patches of varied colors on the bodies. Wooden dolls are mostly made in Germany by the country people. Marbles come exclusively from Saxony, and are prepared in molds by machinery, from a clay not found in other countries. The material for agate marbles is obtained in the Hartz mountains of Germany.

A Japanese top has been lately in vogue, and several Chinese toys have been for years in use. It is worthy of notice that the hints for toys manufactured for generations past in Germany have been usually taken from China.

Croquet instruments are made in Pawtucket and Providence, Rhode Island, and in Boston and Springfield, Mass.

Maple is the wood principally used, though lignum vitae is sometimes employed. For most expensive kinds boxwood is the material. This has become an immense business, and is likely to continue so, as croquet is yet by no means as common a game in the South and West as in the East. Small balls, for parlor use during the winter months, are also made. The new game of martelle employs the same woods. The parlor balls are of ivory.

There are few better or less explored fields for fortune than the invention of toys, and ingenuity seems constantly drawn in that direction."

[The number of applications for patents in toys, during the past few years, has been gradually increasing. We never knew a patentee of any kind of a toy that did not make money out of his patent.—Eds.]

Marmalade.

A paper was read in the British Association on the "Confectionery and Marmalade Trade of Dundee"—a trade which has been in existence for seventy years. Some curious facts were stated which we copy:

The quantity of marmalade made in Dundee at the present time amounts to above 1,000 tons annually, for the produc-

tion of which more than 3,000 chests of the finest bitter oranges are used.


These are imported from Seville, as it has been found that the oranges grown in and around that city possess a peculiar and agreeable aroma, which renders them better adapted for the purpose than those of any other district either in Spain or Italy. When the marmalade is prepared, a sufficient quantity of sugar is added, to preserve it thoroughly, without in any degree impairing the flavor. About four hundred persons are directly employed at the Dundee confectionery works, and it may be added that occupation is furnished to many more in connection with them. For example, one of the Newcastle potteries is to a large extent employed in turning out the well-known printed jars for marmalade. Of these there are about one and a half millions required every year, costing upward of £3,500. The marmalade season, as it may be called—that is, the period during which all that is required of this preserve for the year's supply must be made—usually continues about four months, viz., from the beginning of December to the end of March.

The manufacture of confections is also carried on on a very large scale, and embraces an immense variety of lozenges, comfits, candied peels, etc., to supply the constantly increasing demand both for the home and colonial markets. The quantity of sugar, chiefly refined, used for the confections, marmalade, and preserves made in Dundee, it would be difficult to estimate; but it probably amounts to two thousand tons annually.

By way of giving a scientific term to the paper, the writer stated that "the word 'marmalade' is supposed to be derived from an Indian fruit not unlike the orange, called the *Egle marmelos*, or Indian bael, from which at one period, a similar conserve seems to have been made."

MEYER'S SAFETY SADDLE.

The object of this saddle appears to be not only to make an easy seat for the rider and a comfortable appliance for the horse, but to insure safety, in case of the fright of the horse,

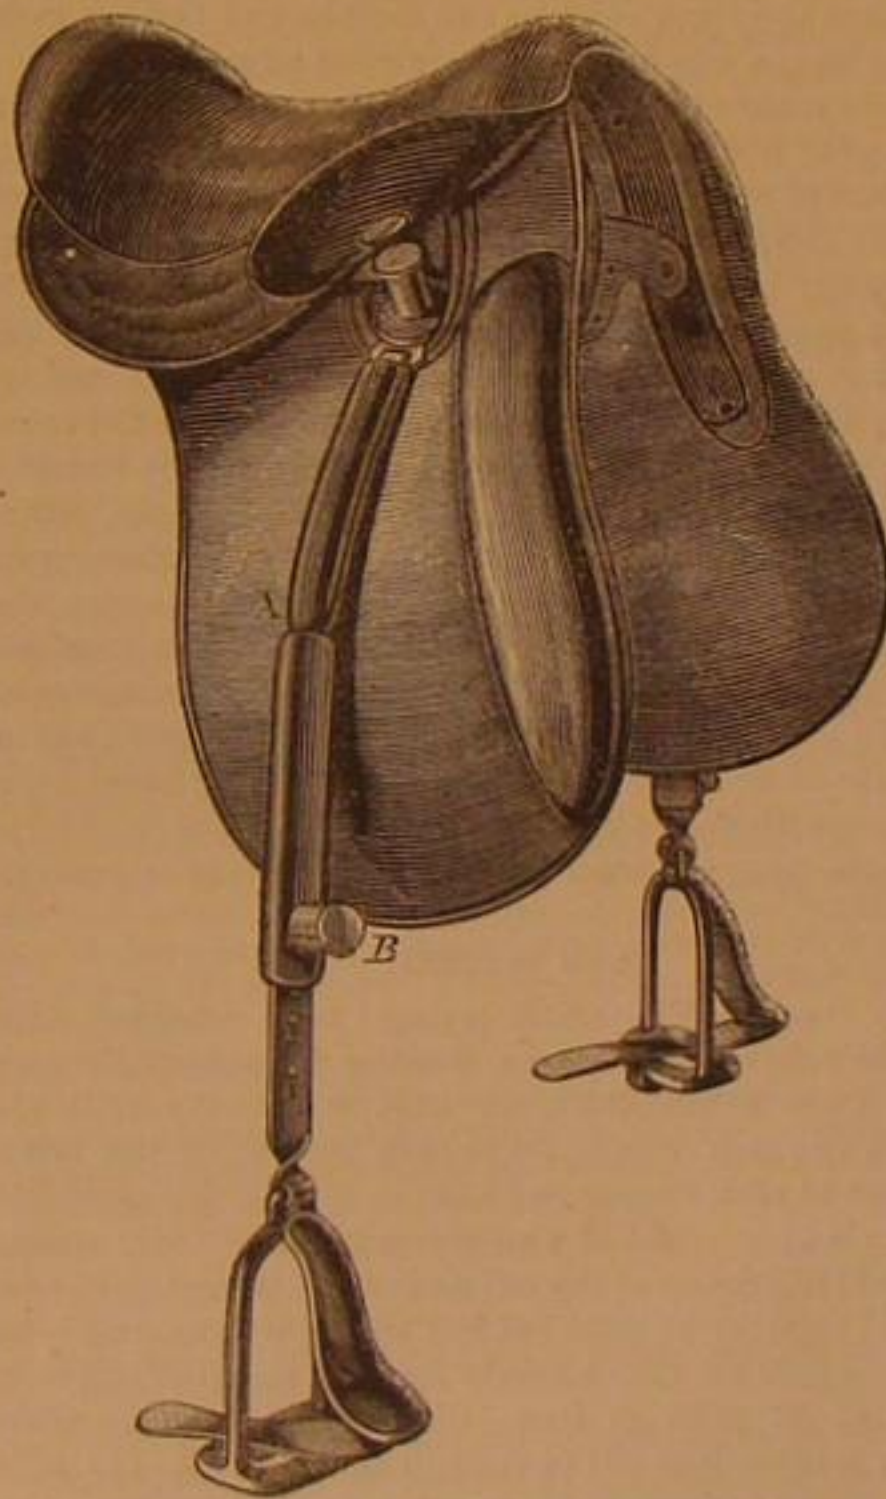

to his rider. The contrivance seems to be well adapted to these ends. The frequent accidents occurring from the entanglement of the foot in the stirrup, the fatal consequences of being drawn by the foot, as was Achilles by Priam, seem to demand some arrangement by which the rider can extricate himself from a very bad situation.

The saddle in the engraving is made to fit the horse, the frame being of iron instead of wood. But the improvement is mainly in the appendages to the saddle. The stirrup strap is in two parts and connected to the saddle proper by means of a metal strap secured in the leather of the strap proper, and held in place by a spring catch, seen in the engraving under the saddle flap. The strap is in two parts and swiveled at A, so that it may be turned in any direction. At B is another spring catch which allows of a raising or lowering of the stirrup. By the use of the upper catch the stirrup strap may be instantly disengaged, so that if the rider is in danger of being thrown he or she may disengage the strap to prevent being caught when thrown or leaping from the horse. The stirrups are hinged to accommodate themselves to the action of the foot. It was patented through the Scientific American Patent Agency Sept. 18, 1867, by Jacques Meyer, 104 Ewen st., Williamsburg, N. Y., who will answer all inquiries relative thereto.

A Shaft in the Oaks Colliery.

Number two shaft is in a condition different from that of number one. Great timbers secure its sides, and the eye can penetrate it but to a very little distance. This is the main-way to the workings, and was with immense labor choked up and stopped soon after the calamity. But what is going on in the great mine is not left entirely to be guessed at. Penetrating the mass of material used in blocking the shaft, is an iron pipe of the circumference of a dessert plate with a

secure groove-lidded top. This extends right down to the subterraneous ways where are still entombed three hundred human beings and forty horses and ponies.

The object of this pipe is that the gas in the terrible place may be measured as to its strength and quality, and to this end outside the big pipe there is affixed an indicator, and every hour note is taken of the pressure shown, and entered in a book. This is part of the night watchman's work. "I should imagine that the gas must have been well nigh exhausted by this time," I remarked. "You never were more mistaken; coom up here and see for yourself!" was the obliging reply. "Up here" was up a short ladder, and after depositing his lamp ("safety" though it was) at a considerable distance, my guide led the way. I did not see him take the lid off the pipe, so I cannot explain how it was done, but I knew the moment that it was done by the strong blowing. "Put oop you han' mon, and feel it." This I did, and whistling through my fingers the foul blast made them feel as though webbed. "Put thy face over mon—just a instant; keep thy mouth shut." And this, blockhead that I was, I likewise did. It was only for an instant, and without doubt I shut my mouth. But where was the use of such a mild precaution against so insidious an enemy? I must have closed every pore of my skin to have escaped its poisonous influence. I paid the penalty of my rashness. Breath of death as it was, it crept into me, and not that night nor next day but the day following, it roused in its lurking place, and, alas! the twisting it gave me! I never yet was seasick, but if that affliction is a tenth as horrible as mine-gas sickness, commend me everlastingly to the land.—James Greenwood.

Europe on the Western Hemisphere.

It may be interesting to know what territory in this hemisphere is claimed by European nations. The *Hartford Courant* says: The European nations owning territory in America are six in number—England, Spain, France, Holland, Denmark, and Sweden. To England belongs all the territory north of us known as British America, as also the Bermudas, the Bahamas, Jamaica, several small West India Islands, English Guiana in South America, and the Falkland Islands. These embrace altogether about one hundred and fifty thousand square miles and a population of nearly five millions. France owns St. Pierre and Miquelon, a small group of islands off the coast of Newfoundland, Martinique and Guadeloupe among the West India Islands, and French Guiana in South America. The population of these possessions is three hundred thousand. Spain owns Cuba, Porto Rico, and the Spanish Virgin Islands. This last scanty remnant of a domain, which once included half of South America, and a quarter of North America, has a population of less than two millions. Holland rules Surinam or Dutch Guiana in South America, and a few small islands of the West Indian group. The number of their inhabitants is not one hundred thousand. Denmark is in possession of the three West Indian islets of St. Croix, St. Thomas and St. John, with a population of thirty-eight thousand; while Sweden exercises sway over the petty adjoining isle of St. Bartholomew, containing but twenty-eight hundred souls. It will thus be seen that the people subject to foreign domination in the New World does not amount to so much as a third of the population of our country alone. Of the six foreign powers only one, England, has a foothold on the mainland of North America; while only two others, France and Holland, have possessions on the continental portion of South America.

Toads.

The paper on "Toads," in *Harper's Magazine* for October is original and descriptive, and does justice to a much maligned member of the animal creation, for whose bad name Shakespeare and Milton are largely responsible. We quote a passage, which informs us why toads are so cold. The writer says: "The abundant moisture and coolness of the toad, so essential to his health and comfort, help to make him disagreeable to us. As the moist coolness of a dog's nose startles any one who feels it unexpectedly or in the dark, so does the invariable dewy cold and clammy sweat of the toad, when touched, offend many a civilized simpleton. I say civilized, remembering that the black barbarians of Senegal, availing themselves of this perpetual coolness produced by the abundant moisture and rapid evaporation on the skin of toads, are in the habit, as Adamson informs us, of applying toads to their foreheads as they traveled in torrid heats over burning sands, on the same principle that Roman ladies of the imperial age carried cooling pots in their hands and bosoms in the form of living serpents; or that the languid beauties of Turkish seraglios pass between their fingers the refrigerating fragrant beads of their amber tusbees.

"In every toad there is a sack of pure water, not at all connected with the kidneys, but serving as a reservoir, and furnishing, doubtless, a part of the fluid which perspires from the skin. This fluid is very harmless in the common English and American toads. So, also, is the liquid which is largely secreted by the bean-shaped bunch on each side of the toad's head, as well as that which is so freely ejected when you suddenly grasp a toad in your hands. Most persons are afraid of these fluids, and imagine them poisonous. They are mistaken. Not even Macbeth's weird sisters could now find venom in the common toad. It is true, however, that these juices have a slightly irritating effect when applied to the eyes, or to a flesh wound, and that cat or dog does not like to take a second taste. But they are substantially harmless."

COMPOSITION OF BRITANNIA METAL.—Ordinary Britannia metal is composed of equal parts good red brass, antimony, tin, bismuth, and lead.

PROGRESS OF THE PACIFIC RAILROAD--THE SYSTEM ADOPTED FOR LAYING THE TRACK.

A correspondent of the *Evening Post*, writing from Omaha, under date October 11, thus describes the progress of work on the great Pacific Railroad and the mode of laying the track.

To the people of the East the Pacific Railroad, building thousands of miles away in a desert country, and meeting obstacles only to overcome them is a great enterprise; but to the western man it is the one great topic of conversation. In fact, almost every man here is in some way personally interested in it, either actually working on the road, or getting out ties, or cutting cord wood, or in some one of the numerous contracts connected with it.

THE DIFFERENT PACIFIC RAILROADS.

Here is a Union Pacific and a Central Pacific, and a Union Pacific Eastern Division, and a Northern Pacific, and a Southwestern Pacific. Of these the Union Pacific, and the Central Pacific are the great Pacific Railroad we read about, and when completed will form one continuous line from Omaha to Sacramento. The Union Pacific has already completed nearly five hundred miles west, commencing at Omaha and the Central Pacific is in running order more than a hundred miles east of Sacramento. They will unite somewhere about Salt Lake City. Both roads have government assistance and both roads have their bonds in market. The Union Pacific Eastern Division, starting from Wyandotte, Kansas, follows the Smoky Hill route, passes through Leavenworth and Topeka, and is now in running order to a point called Ellsworth, about two-hundred and twenty-five miles out.

It is this road that has been threatened by the Indians, and to the building of this that Ragged Shirt Tail and his companions object. This road also receives government assistance, and as now projected will strike the Union Pacific at some point west of Denver, and will be a sort of branch of it. The Southern Pacific, starting from St. Paul is as yet hardly under way, and the southwest branch running from St. Louis to Rolla, and thence by way of Santa Fé, through Southern California to San Francisco, is in about the same condition. The Northern Pacific is not intended to strike San Francisco, but rather Portland or some city in Oregon, and the Southwest Branch very likely will make some point lower down on the California coast its western terminus. But while these other roads are debating what route to take, or how to raise the funds to build the road with, the Union Pacific has thoroughly built and equipped nearly five hundred miles of road, is already within a hundred miles of Denver, and although running through a waste of wilderness almost uninhabited, more than pays its expenses.

WEST FROM OMAHA.

You get into the cars at Omaha at six in the evening. There is nothing in the passengers to remind you of the extraordinary nature of your trip, unless it is that almost every one has a rifle, and that the conversation smacks of buffalo, and the miners, and frontier adventures. Comfortable sleeping cars are attached, and when you wake up in the morning we have passed Fort Kearney and are fairly on the Plains. As far as you can see to the right is one broad unbroken expanse of plain. On the left is the Platt with its bluffs, and here and there a straggling willow or cottonwood. But we have passed the region of timber, and shall see no more until we come to the present end of the road beyond Antelope, where on the bluffs a few stunted cedars and pines wrestle with the winds for their existence. The "Plains," in the sense in which the word is generally used, means all that immense tract of country which is without timber and without water. Sometimes this is an immense prairie, level as a floor and covered with waving grass; sometimes a plane hemmed in on either side by barren bluffs. Rain seldom falls here, and it is only available agriculturally for stock raising. After leaving Fort Kearney no farms are to be seen, but instead, now and then a scared antelope starts up and makes off over the plain, and the immense horns and the bones of buffalo lying along the route show where they have been killed. At Fort Kearney four Englishmen came aboard the train who had been out on a five days' hunt, and had killed fifty buffalo. The tongues they cut out, and the carcasses they left. They did not want the meat, and they only killed them for the sport of the thing. It is just this wanton waste of useful life that so enrages the Indian, and excites an anger which is vented on the first white men he is strong enough to overcome.

HOW THE TRACK IS LAID.

Breakfast is over and work commences at half past six, but it is not till seven that it is fairly under way. We shall only see the track-laying to-day, for the grading, which is a separate part of the work, is already completed to Cheyenne, thirty miles ahead. The work of track-laying is divided into three parts:—the tie-laying, the track-laying proper, and the bolting and spiking.

THE TIE PLACERS.

First come the engineers, who fix the line of the ties, determining where they are to go; next a set of skilful workmen who put down a few ties at the proper level, enough to determine the position of the rest of the ties, and finally the great body of the layers, who fix the remaining ties on the level of those already down—workmen follow, throwing in dirt and ramming it down, and all is then ready for the track-layers. These are a gang of ten stalwart fellows, in whose work is the great attraction. Taking an open truck of a car, they run it back to where the rails were dumped off of the supply train, and load it with rails and the proper number of joints and spikes. A couple of horses are then hitched to the car and haul it to the end of the track, when they are unhitched and sent back for another load leaving in their place

a small but intelligent horse, that performs his work with great steadiness and zeal.

THE RAIL LIFTERS.

The truck being at the end of the track and the wheels blocked, at a word from the foreman five men on each side seize a rail and pull it out over the front of the car to its full length. "Down," sings out the foreman, and down comes two rails into their proper places on the ties. In an instant the man at the farther end has applied a measure and adjusted the width, the man next the car has whipped out the blocks, the little horse knows that now it is his turn and strains and pulls, and the car runs over nine yards more of the Union Pacific Railroad. "Whoa up!" the horse stops, the wheels are blocked, again two more rails are seized, "Down" cries the foreman again, and down come nine yards more. It is very exciting to watch this work, but you can't keep still. Every fifteen seconds the voice of the foreman rings out sonorous "Down," and every fifteen seconds another set of rails respond with heavy clang. Occasionally a rail comes out that is not perfectly straight. In this case instead of putting it down, one end is rested on the truck, all the men steady it, and a mighty Hercules, seizing a tremendous sledge hammer, deals it such blows as soon reduce it to its normal line.

THE RATE OF BUILDING.

Nine yards in fifteen seconds! Great heavens, what a pace! This is thirty-six yards a minute; nearly a mile and a quarter an hour. At this rate, counting ten hours a day for work, and estimating the distance to Sacramento at one thousand six hundred miles, the work would be done in a little more than four months. But follow the truck along, and you will see why it is that this pace is not kept up, and why two miles a day is about an average of the work. A truck carries thirty rails. It exhausts its load then after dropping fifteen sets of rails, and must go back for another. This is what takes time, for the rails are heavy and slow to be loaded, and the truck must be run back to the point where they were unloaded from the supply train. As the track advances, this point recedes, and the truck must be run further and further back each time until a new load can be dumped off nearer.

This and many other difficulties reduce the track laying to an average of about two miles a day. In September, owing to the want of bolts and spikes, only ten miles of track were laid. The most constant forethought and the greatest energy are necessary to keep always ready rails enough, and bolts enough, and spikes enough, and the thousand and one articles, the want of any one of which would stop the work. And indeed, considering that the iron comes from all over the country, much of it from New England; that the ties are brought from wherever they can be got, many from Michigan, Minnesota and Wisconsin; that everything must be transported by a single line of track to Council Bluffs, thence across the uncertain Missouri River in boats, and again five hundred miles to their destination, and that the daily consumption of rails alone for two miles progress is two hundred tons, and of ties five thousand two hundred and eighty, and of everything else in proportion—considering all this, I say, the wonder is not that the progress is not greater, but that it is as great as it is.

THE BOLTERS.

But to resume: The track laying I have described only leaves the rails in their places, resting there by their own weight. Close behind the truck from which the rails are laid come two men who place at each jointing of the rail a clamp, and at each sleeper two spikes. These clamps, called the Fish clamps, consist of two pieces of strap iron, which are placed lengthwise of the rail and in the hollow of it, and are bolted together by bolts passing through them and both rails. The rails are thus securely fastened together and form one continuous piece of iron. Close behind the clampers come the spikers, who put in enough spikes to hold the rails in their proper position until the main body of spikers come up, when the exact width of the rails is fixed, the sleepers finally settled, and the last spikes driven home—and the work is done. This is the main work, but a dozen branches of it are going on all at the same time. Fifty mule teams are constantly hauling up sleepers, water carts are making constant trips to supply the whole establishment with water. Bridge men, three or four miles ahead, must permit no delay from bridges, and the telegraph must be the *fidus Achates* of the railroad. Every twenty miles a water tank is to be constructed, and wood wherever it can be got must be cut up and hauled for the engines.

The Rocky Mountains are now in sight. Thirty miles further and Cheyenne will be reached, and it is hoped the Black Hills this fall. The winter will then set in so as to prevent further work this year. But next year, when spring opens, it will again go on and with renewed energy. General Dodge, the Chief Engineer of the road, who has just returned from a six months' exploration of the mountains, reports finding an easier grade and an abundance of excellent coal. Already steps are taking to form a new territory, to be called Wyoming, and to be made up of parts of Colorado, Idaho, Dakota and Nebraska. Build the railroad, and the railroad will populate the new territory.

Restaurants of the French Exhibition.

Of the many singular features of the French Exhibition, now drawing to a close, nothing is more striking than the elegant restaurants that surround the building. A certain amount of space was appropriated for this purpose to the various countries that had departments in the Exhibition, and the restaurants were fitted up, supplied and served in accordance with the tastes and customs of these varied nationalities. A Frenchman can get his coffee, wine and bread, a German his beer, sausage and sour kroust, a Yankee his sherry

cobbler, and pumpkin pie, the Englishman his beef, mutton and pale ale, and so on through all the whole list of edibles which the science of gastronomy can suggest to satisfy the appetite. At midday the work begins, and for two hours the music of crockery and the rattle of knives and forks seems to absorb the attention of everybody.

It is doubtful however if these restaurants have success in a financial point of view. The Paris journals already announce that the chief *restauranteur* of the French Department is a bankrupt, and that his liabilities are \$300,000, and there is considerable grumbling on the part of the waiters in some of the others that their wages have not been paid, and a general collapse of empty purses is expected to crown the enterprise.

MANUFACTURING, MINING, AND RAILROAD ITEMS.

The total silk production of California for 1867 is estimated at 210,000 cocoons and the supply of mulberry far exceeds the demand. The business is quite profitable just now, but the silk men are advancing cautiously.

The "swamp angel" which during its service before Charlestown, S. C. gained a great notoriety, is now lying at a machine shop in Trenton, N. J. awaiting its turn to be broken up and fashioned into more peaceful and useful implements.

Fire-clay, rivaling the best deposits of Europe, is found within four miles of St. Louis. The bed is fifteen feet thick and very extensive. Fire brick made of this clay is capable of resisting very high temperatures, and is excellent material for retorts, alembics, crucibles and furnaces.

The Missouri and Mississippi railroad is now under construction. The charter provides for the building of a road from Macon, on the North Missouri railroad, to the mouth of the Des Moines in the northeast part of the State, where a connection will be made with the Iowa system of railroads, and with those of Illinois by means of the road which terminates at Warsaw on the opposite side of the Mississippi river.

The marbles of Vermont have become one of its chief sources of wealth. The quarries and mills near Rutland, supply a large per cent of the marble of domestic production which is used in this country for statuary, monumental and other purposes, where a fine grade is desired. A capital of several millions of dollars is employed in the business, and a large proportion of those who have embarked in it have been in an eminent degree successful.

Among the new manufactures put in operation in San Francisco during the past year, are the Pacific Woolen Mills for manufacturing knit goods at the rate of \$500,000 annually; the Golden city chemical works with a capital of \$2,000,000, for preparing a great variety of chemicals and medicinal extracts; the San Francisco Glass Works for making white and colored glass to the extent of \$150,000 a year, and the new Linseed oil and Paint Works, with capacity to supply the whole Pacific coast. These with minor enterprises inaugurated during the same period have absorbed more than \$3,000,000 capital and will turn out manufactures to half that amount yearly.

The elevation of Iron mountain, Missouri, is 238 feet and the area of its base 500 acres. The solid contents of the cone are estimated at 230,000,000 tons.

In Mexico there exist 197 different kinds of minerals among which are gold, silver, iron, copper, lead, zinc, mercury and tin. The following are said to be peculiar to that country: Rhodium, gold selenite of mercury, zo-chillanite, jalapite, lodyrte, coccineol, plumbic, silver obsidian, and vanadite.

A British consul in Japan gives a remarkable account of the wealth of the lead, iron and coal deposits in the island of Yesso. In one place coal forms the sea cliffs, and in another he walked four miles over an iron sand which contained over 60 per cent of metal. There are also indications of gold and copper.

A very singular and quite complicated railroad accident, or series of accidents occurred last month on the line between Manchester, (Enz) and Derby. A cattle train of twenty-three cars entering the Peak Forest tunnel came into collision with a gravel train which had preceded it. One life was lost and much damage done, but the mischief did not end here, for both trains were standing on a steep incline, down which the recoil started the remaining cattle cars. An express train was standing on the rails and seeing the trucks approaching, the engine reversed his engine and jumped off, but before the express had retrograded many rods a second collision ensued, the express train then continuing to back at a furious speed until stopped on an up grade by the loss of steam.

Recent American and Foreign Patents.

Under this heading we shall publish weekly notes of some of the more prominent home and foreign patents.

INDICATOR FOR PUNCHING MACHINES.—W. Welch, Bridgeport, Conn.—This invention relates to a new device by which the number of strokes of punches, shears, milling machines, and all such machines, in which reciprocating motion is generated by rotating motion, can be registered, said device being so arranged that the registering apparatus can be put at rest when it is not desired that the strokes should be counted, as for instance, for lubricating, repairing, and testing purposes.

MANGING MACHINE.—Johan Johansen, Springfield, Ill.—This invention has for its object to furnish an improved mangle, simple in construction, strong, not liable to get out of order, and which will do its work quickly and well without injury to the fabric.

HOSE COUPLING.—Moseley S. Curtis, New York City.—This invention consists in securing the parts of the coupling to each other by sliding blocks, and in operating said blocks by means of eccentric grooves formed in a movable part of the coupling.

ARCH BARS AND DOUBLE ANDRONS FOR EVAPORATING CANE JUICE, ETC.—Gaius S. Deane, Grand Rapids, Mich.—This invention has for its object to furnish improved bars and androns designed especially for farmers' use in supporting their evaporating pans and fire wood in arches built by them in the sugar bush for manufacturing sugar, but which are equally useful in other situations.

CARRIAGE CLIPS.—Edwin Meeker, Bridgeport, Conn.—This invention relates to certain improvements in the manufacture of carriage and coach clips, and consists in forming the same by means of dies, while they were heretofore made by hand.

FINE-TOOTH COMBS.—James H. Briggs, Brooklyn, N. Y.—The object of this invention is to so arrange a metal strip or band on fine-tooth combs, that the said combs may thereby be strengthened, or that two half combs may thereby be united to make one.

COMPOSITION FOR ROOFING.—Andrew P. Jackson and Oils Pratt, Warsaw, Ind.—The main feature in this invention is the use of a mineral found in great quantities near Dayton, Ohio, in combination with tar, sulphur, plumbago, and litharge, as a roofing material.

PROPELLER AND CURRENT WHEEL.—A. B. Smith, Yankton, Dakota.—This invention is a device which can be used as an endless chain propeller for steamboats, or as a water wheel to be rotated by a running stream for the purpose of furnishing motive power to drive machinery.

LOCK FOR FIRE-ARMS.—Wm. F. Kusmaul, Baltimore, Md.—In this invention a spring stop is provided, which catches under a shoulder of the hammer and holds it up from the cap when the gun is not in use. When the gun is cocked, the spring stop automatically retreats and leaves the hammer to descend upon the cap.

COMBINED COTTON PRESS AND FEEDER.—Henry Zellner, Columbia, Tenn.—In this invention the ginned cotton is fed to the machine through a chute in which it is cleaned from dust. It is then forced into the press under

followed, which presses it to the bottom of the tube, where it is held down by a novel device while the follower returns for a second tubeful. This process is repeated till the bale is completed.

SAUSAGES.—Jacob L. Chevalier, Newark, N. J.—This invention consists in combining fish, either fresh or salted, with pork or lard, and with or without potatoes, for preparing the article of food known as sausages.

LADY'S TATTLING SHUTTLE.—Silas Schofield, Plainville, Mass.—This invention consists in attaching the shuttle to a holder and providing for winding the thread on the shuttle by a key or crank, thereby greatly facilitating the operation.

WIND MILL.—E. W. Mills, Syracuse, N. Y.—This invention relates to a new and improved method of controlling and regulating the power of the wind and to its application to a pump or other purposes.

ARTIFICIAL LEG.—Henry L. Mills, St. Paul, Minn.—This invention relates to an improved method of constructing an artificial leg, and consists in several devices and arrangements for securing comfort and convenience to the wearer and making a strong, cheap, and durable artificial limb.

TRANSPLANTER.—C. R. Disbrow, Bath, N. Y. Patented Oct. 8, 1867.—This invention relates to a new and improved mode of constructing an implement for the use of gardeners in transplanting plants and shrubs, to remove them with the soil in which they grow without disturbing the roots.

SCISSORS.—J. A. Althorpe, New Harmony, Ind. Patented Oct. 8, 1867.—The design of this invention is to combine a buttonhole cutter with an ordinary pair of scissors, for the sake of convenience and economy.

APPARATUS EMPLOYED IN THE PREPARATION OF COTTON AND OTHER FIBROUS MATERIAL.—Wm. Hamer, Little Lever, England. Patented Oct. 8, 1867.—This invention relates to the removal of the silver from the case or collar, and consists in placing underneath the material a spring of metal, so that as the silver is removed from the top of the can or collar its lower portion is raised upward by the spring, and thereby prevents breakage.

APPARATUS FOR OILING PROPELLER CRANKS.—Joseph Davis, New York City. Patented Oct. 8, 1867.—This invention is designed to obviate the difficulty of oiling journals of propeller cranks and other inaccessible parts of machinery, and provides the means of lubricating them with regularity and certainty and no waste of oil.

LOOM.—H. D. Hunt, Danville, Ill. Patented Oct. 8, 1867.—This invention relates to an improvement in hand looms, and consists in connecting movable plates and levers attached to the lay with the breast beam and the shuttle devices, in such manner that the movement of the lay shall operate on the devices to throw the shuttle and other devices connected with the take up of the cloth beam and the working of the treadles and yarn beam.

CULTIVATOR COUPLING.—Joshua Pierpont, La Harpe, Ill. Patented Oct. 8, 1867.—This invention relates to an improvement in the axle and coupling of cultivators, and consists in casting the arms of the axle with a longitudinal groove on the upper side of each, for receiving the ends of a wrought iron connecting bar and a box or boxes on the under side, for receiving a turntable screw.

BUCKLE.—A. H. Hopkins, Goshen, Ind. Patented Oct. 8, 1867.—This invention relates to an improved plan of construction in metal buckles for harness leathers, or straps of any kind, and consists in forming a rectangular buckle with two tongues, one at each end, hung upon a center bar on opposite sides, in opposite directions, and each tongue provided with a tuck loop for the end of the strap.

HAY FORK.—B. F. Stewart, Cadiz, Ohio.—This invention relates to an improvement in the construction of hay forks, and consists in attaching two curved tines or prongs to a handle by a pivot, on one of which prongs is pivoted a link that is connected with the other prong by a wrist working in a slot, the parts being so arranged and operated that when the prongs are closed they can be pushed into the hay, opening as they penetrate into it, until they are fully expanded to take up a load, which, upon being lifted by the handle and deposited in place in the usual way, is released from the fork by drawing with a hand rope upon the link that connects the prongs in order to close them again.

DEVICE FOR CAPPING SCREW.—Orrin W. Swift, New Haven, Conn.—This invention relates to a new and improved device for capping screws, that is to say, covering the heads of the screws with a white metal cap, and closing the edge of the same all around underneath the edge of the head, and at the same time pressing the portion of the cap over the neck in the screw head directly into the neck without cutting away the cap over the neck as is now done.

OIL CAN.—Charles Williams, Vineland, N. J.—This invention relates to a new and improved oil can of that class which are used for oiling machinery, and are generally made small or portable. The invention consists in the application of an elastic tube to the interior of the nozzle of the can, the tube being loaded with a weight at its free or disengaged end, whereby all of the oil within the can may be expelled from it, and the oil prevented from leaking out of the nozzle in case the can be casually upset.

HUB AND AXLE FOR VEHICLES.—D. M. Buckhart, Mount Kisco, N. Y.—This invention relates to a new and improved metallic hub and axle for vehicles, and it consists in a novel construction of the hub whereby the spokes may be firmly secured in it, the hub allowed to turn on its axle with but little practice, and the whole rendered capable of being adjusted at a greater or less distance apart, as may be desired, and other advantages obtained.

CART SADDLE.—John Bea, Newark, N. J.—This invention relates to a new and useful improvement in saddles, which are used with cart harnesses, and by which the horse is made to sustain a portion of the load of the cart. The invention consists in a novel manner of constructing the saddle, whereby the same may be manufactured at a much less cost than hitherto, and equally as good a saddle obtained.

TIE FOR BALE HOOP.—J. L. Sheppard, Charleston, S. C.—This invention relates to a new and improved tie or lock for connecting together the ends of bale hoops, after the bale has been properly compressed. The object of the invention is to obtain a tie or lock for the purpose specified, which will admit of the ends of the hoop being readily connected together, and which will also admit of bales being repressed without detaching the hoops from the bale, or the tie or lock from the ends of the hoops.

GRAIN-DISCHARGING DEVICE FOR REAPERS.—K. H. C. Preston, Manlius, N. Y.—This invention consists of a revolving toothed head or shaft applied to the platform of a reaper in such a manner that it will receive the grain as it is cut, and when a sufficient quantity of grain has been deposited upon it, be capable, by a semi-revolution, of discharging the grain from the platform without the liability of becoming choked or clogged, and without tangling the grain.

PANEL TABLE.—J. G. Greene, Port Henry, N. Y.—This invention has for its object to so construct the panel ends of sewing machine cases, and other articles of furniture, or the paneling at the side of a room, or beneath a window, that it may be drawn out and form a table.

GOPHER TRAP.—John Curtis, St. Charles, Min.—This invention has for its object to furnish an improved trap for catching gophers, which shall be simple in construction and effective in operation.

TERRASPIHERE.—Ebenzer Root, Indianapolis, Ind.—This invention relates to improvements in the terrasphere, for which letters patent were granted on the 15th day of December, 1866.

HAY RAKING AND LOADING DEVICE.—Hosea Willard, Vergennes, Vt.—This invention relates to a certain new and useful improvement on a machine for raking and loading hay, for which letters were granted, bearing date August 1st, 1866. The invention consists, 1st, in an improved means for discharging the elevated hay from the upper part of the endless elevator, whereby the hay is discharged at the point specified, in a perfect manner. The invention consists, 2d, in an improved application of the endless elevator to the machine, whereby the teeth of the elevator are allowed to yield or give perfectly to obstructions which may be in their path, or yield to inequalities of the surface of the ground. The invention consists, 3d, in the application of wing racks to the machine, and endless feeders or conveyors connected therewith, whereby the machine is made to operate over a comparatively wide area, and rendered available for raking up and loading hay as left on the field by the mowing machine.

WAGON BRAKE.—L. E. Woodard, Owasso, Mich.—This invention relates to an improvement in the construction of brakes for wagons, and other vehicles, and consists in attaching a brake bar to the reach to act upon the wheels by means of an eccentric headed lever or cam, in such manner that the brakes may be quickly and powerfully applied, and instantly disengaged from the wheels to relieve them from pressure by a slight movement of the eccentric lever.

SMOKE STACK.—Patrick Kelly, Nashville, Tenn.—This invention consists in placing within the chimney or smoke stack certain arresters, deflectors, and conductors, which not only prevent the escape of the sparks from the chimney, but collect and discharge them.

DUMB WAITER.—T. B. Bryson, Newcastle, Pa.—The nature of this invention consists in constructing a portable dumb waiter, easily fitted in a dwelling house for opening up through the floor of an upper room, over another room or cellar, without requiring a closet to inclose it, or occupying space in the upper room permanently.

MOLE TRAP.—John Westcott, Patchogue, N. Y.—This invention relates to an improved mole trap, and consists in a pair of forks pressed together by a spring. These are kept apart by a metal dog, the trap set lengthwise, in the channel made by the mole in the ground.

EXPANSION DRILL.—Gilbert Mackinnon, Portsmouth, N. H.—This invention consists in attaching expansible cutters to a suitable cutter holder and expanding the same by a wedge and screw arranged so that by turning the nut on the screw the size of the tool can be varied.

BALING PRESS.—Geo. H. Hoke and John A. Brown, Elizabeth, Pa.—This invention relates to an improved baling press, for hay, cotton, or other substances, and consists in improvements in construction by an arrangement of a lever and toggle connected with a beater or follower operated directly by means of ropes and capstan, with horse power.

MATHEMATICAL INSTRUMENT.—William Rutherford, Athens, Ga.—This invention relates to an improved mathematical instrument for the use of civil engineers, surveyors, navigators, architects, and draftsmen generally, in plotting a survey from field notes, the traverse or rhumb line of sailing vessels, laying down plans of buildings, etc., with great facility and accuracy.

TOY ENGINE.—James L. Warner, New York City.—This invention consists in the application of a glass boiler, which is provided at the top with one or more tubular iron jointed arms. The said boiler is suspended from a wire or other rope, in which a swivel is arranged, to allow the boiler to revolve; the boiler is filled with liquid, of any desired description, and is suspended above a lamp so that steam is generated in it. The steam escaping through the curved tubular arm, rotates the boiler by reaction.

ELEVATOR.—Joshua Walker, Kansas City, Mo.—This invention relates to a new and improved device for elevating articles, and is more especially designed for loading the tenders of locomotives with wood or coal, although it is applicable to other purposes. The object of the invention is to economize in labor and facilitate the loading of boats, locomotive tenders, etc., etc.

SASH FRAME.—J. E. Cowdery, Wheatland, Iowa.—This invention relates to an improvement in sash frames, and consists in an L or tongue-shaped lip attached by its long arm to the meeting rail of each sash, so that the tongue of each will enter the groove of the other when the window is closed.

MINERAL PAINT.—J. R. Smith, Keyport, N. J.—The object of this invention is to make a composition which, when used as a paint, shall form a water and fire-proof paint.

CARRIAGE WHEELS.—Reuben Brooks, Rockport, Mass.—This invention relates to a new and improved method of joining the felloes of carriage wheels whereby the wheel is rendered much more durable than it is when the felloes are joined in the ordinary way, and it consists in providing a metallic clamp for the support of the joint at the end of the spoke.

STOVE.—C. H. Roberts, Troy, N. Y.—This invention consists in applying wood to the knobs of stove doors, whereby the doors may be handled without danger of burning the fingers.

SEEDING MACHINE.—B. A. Shearer, Crown Point Center, N. Y.—This invention relates to a new and improved machine for sowing seed broadcast, and it consists of a revolving grooved cylinder arranged or applied in a novel way and using in connection with the same a series of harrow or covering teeth, all being applied to a frame mounted on wheels and provided with a seed hopper.

KEYS FOR BOLTS.—Nathan Adams, Altoona, Pa.—This invention relates to a machine for making split or spring keys for securing bolts, and it consists in the use of dies and levers whereby the bar from which the key is to be made is cut, bent into the required shape, and then dropped, the whole operation requiring but two moves of a lever, the whole machine being very small and compact.

ADJUSTABLE ROLLER FRAME FOR ELEVATOR PLATFORM.—R. M. Van Sicker, New York.—This invention has for its object to furnish an improved attachment to an improved elevator, patented by the same inventor Feb. 12, 1870, so as to make it more convenient and efficient in use, and which may at the same time be used with other elevator platforms with equal facility and advantage.

JAWS FOR BENCH VISES, ETC.—Nathaniel Wilton, Groton, N. H.—This invention has for its object to improve the construction of the jaws of lathe dogs, bench vises, etc., so that they may be able to hold the work firmly whether it be straight or tapering.

HAY RAKER AND LOADER.—Archibald Campbell, Peoria, Ill.—This invention has for its object to furnish an improved machine for attachment to hay wagons by means of which the hay may be raked and elevated upon the wagon rapidly, conveniently, and without requiring extra help.

GRAIN AND MEAL DRYER.—John R. Everett, Mount Vernon, Ind.—This invention has for its object to improve the construction of the improved grain dryer patented by the same inventor Nov. 27, 1866, and numbered 59,999, so as to make it more effective in operation, and so that the same effect may be produced with a smaller amount of fuel.

HORSE-POWER.—Zacharias Tobias, Covington, Ohio.—This invention has for its object to furnish an improved horse-power, so constructed and arranged that the labor of loading the horse-power upon and unloading it from a wagon every time it is transported from one place to another may not be necessary.

Answers to Correspondents.

CORRESPONDENTS who expect to receive answers to their letters must, in all cases, sign their names. We have a right to know those who seek information from us; besides, as sometimes happens, we may prefer to address the correspondent by mail.

SPECIAL NOTE.—This column is designed for the general interest and instruction of our readers, not for gratuitous replies to questions of a purely business or personal nature. We will publish such inquiries, however, when paid for as advertisements at 50 cents a line, under the head of "Business and Personal."

NOTE.—All references to back numbers should be by volume and page.

P. W. S., of Mass.—The so-called granite of Quincy, Mass., is really sienite, and as a building material is preferable to real granite, the mica in the latter tending to contribute to its disintegration. Sienite—that quarried at Quincy—is composed of felspar, quartz, and hornblende.

G. D. G., of N. Y., says: "A friend of mine is trying to make a marketable hard soap from the following recipe: 5 bars B. T. Babbitt's German Erase Soap; 5 quarts of water; three ounces of borax, and 1 ounce spirits of ammonia. But his product is too soft and shrinks badly. He asks how it can be made harder and less shrinkable." We reply: use one quart instead of five quarts of water to get a harder product, and keep the soap in a damp cellar to prevent shrinking. But the proposed improvement on the original Babbitt soap will not pay for the trouble. The recipe is probably a catchpenny imposition.

A. G., of Fla., says: "I see in your issue of Oct. 5th, page 216, that J. H. S., of Ohio, asks how he can harden steel plows without springing. This is my recipe: Chalk the share thoroughly, then heat it a

cherry red and lower it slowly into a tank or barrel of rain water—in an upright position—and it will not spring."

C. D., of Mass., asks us to tell him how to find the horse-power of a steam engine. We have replied to this question at least six times in as many months through this column. If C. D. will examine back numbers of this paper—which we have not time to do—or read Bourne's Hand Book of the Steam Engine he will procure the knowledge for himself, and it will be all the more valuable to him for the labor expended.

J. D. P., of Pa.—The tin foil used in putting up tobacco is now made of lead and tin. The exact process we do not understand, but believe it is similar to the manufacture of gold wire, a bar of lead being coated with tin and then rolled to the requisite tenuity.

C. H., of Conn.—The note you refer to concerning the employment of a cane held above the head as a protector from rain in lieu of an umbrella, if published in these columns, was probably noticed as a popular humbug. We are not aware of such an invention, and cannot accept the explanation you propose.

A. M. A., of N. Y.—Enamel colors used by jewellers are metallic oxides incorporated with a fusible flux such as borax, flint, oxide of lead, etc. The jeweller labors under considerable difficulty during the process of application, for the tints on the palette in most cases differ from those they assume after being heated sufficiently to cause the color to become fixed to the ware. If "over fired" or "short fired" the color is destroyed beyond remedy in one case, or assumes one of the intermediate variety of shades, in the other; the definite heat which alone gives the color a perfect hue, is only recognized after long practice.

J. B., of O., is referred to the corresponding column on page 87, current volume, for cements for water joints.

A. J., of Md.—Needles made of steel, and called at first Spanish needles, were introduced in the reign of Queen Elizabeth, but by whom invented, history fails to tell. Pins, such as we now use, seem to have been unknown in England until about the middle of the 16th century. Previously, substitutes were employed made of box wood, ivory, bone, and a few of silver, all being necessarily of such large size that brooches and hooks and eyes were much employed in preference for holding together the parts of the dress.

L. F. S., of N. Y.—The latest explanation for the autumnal change of leaves with which we are acquainted is that of M. Carey Lea, of Philadelphia. He considers light to be the primary cause, the tendency always being to produce photographic colors. While the leaf retains its full vitality this influence is successfully resisted, but in autumn the leaf gradually loses its hold upon the branch, and the action of light predominates producing the change. These views we previously published on page 181, Vol. XV.

P. D., Canada.—Hollow water grate bars are very old.

C. R. W., of Pa., asks for a thermometer to ascertain the temperature of molten iron. Above the boiling point of mercury heat is measured by its effect upon solids. Wedgewood's pyrometer is the oldest instrument of this kind, and is founded upon the contraction of clay at high temperatures. Daniell's pyrometer is more exact, depending upon the expansion of a platinum bar encased in a sheath of black lead. A line under our "Business and Personal" column would bring you the address of manufacturers of these instruments which we are unable to furnish.

S. G., of N. Y., asks what is the greatest number of times that any piece to be brought to the shoulder can be fired in a minute, how it is constructed, what kind of a charge is used, and if it has more than one trigger. We refer our correspondent to the Ordnance Board of the War Department. We have seen a Sharp's rifle brought to the shoulder and fired twenty-one times in a minute. Its construction must be familiar to all interested in these matters. Other pieces, we are informed, excel this in rapidity.

P. C., of Me.—Your article on the combustion of fuel is anticipated by a similar one in this issue of the SCIENTIFIC AMERICAN. Your facts have been so often reiterated that it hardly seems necessary now to reproduce them. We reserve the article for possible future use.

W. C., of Ohio informs us that he has sent a communication on boiler setting which has not been published and asks what he shall do to obtain a hearing. In reply we would say that we wish for facts not surmises, and want them boiled down to their essence. "This rule," as the military men say, "is general."

T. I., of England, proposes, for a light water power, building a tank in which is an upright pipe, bent as a syphon, the longer limb descending outside, below the reservoir, with some means of exhaust to induce the flow of water which will be discharged on a wheel. But he wishes to return the water back and asks how it is to be done. He inquires also how he can obtain some of the ingenious American tools he sees noticed in the SCIENTIFIC AMERICAN and refers to an improved gimlet and a back saw, as examples. If he will refer to No. 17, current Vol., he will find the leading editorial contains some information on his first inquiry, and in our issue of July 13th, page 23, and that of July 20th, page 37, he will understand about the back saw and gimlet. Any responsible dealer in tools and machinery can furnish him with American improved tools. Probably advertisers in the SCIENTIFIC AMERICAN will notice this call from across the water.

H. H., of Wis., sends us a carefully prepared paper on mechanical power which we have read and the statements of which we have considered. If they are valuable they are too verbose, and as they contravert the experience of years and the observations of scientists we decline to publish them in the form presented. Our correspondent sneers at science as having "for ages believed in false theories." Let him present the opposing facts and we will welcome them.

Business and Personal.

The charge for insertion under this head is 50 cents a line.

Inventors and Manufacturers of Labor-saving Machinery. Articles useful in the Household, the Workshop, or on the Farm, will find it to their interest to send circulars to, or correspond with, "The Texas Labor-Saving Machinery Agency," P. O. Box 244, Houston, Texas.

Mr. N. E. Blake, who obtained a Patent for a Roofing Composition, will please address R. C. Graves, Barnesville, Ohio.

Sewing-Machine Cabinet-Case Manufacturers or Patentees, and Manufacturers of Sewing-Machine Offers please publish your address in this paper.

Wanted—Address of Manufacturers of Bullets and Cartridges, C. H. Remington, Dubuque, Iowa.

A Young Man, who has completed the Scientific Course in the Cooper Institute and received the Medal and Diploma of the same, desires a situation as assistant to a Civil Engineer or Surveyor. Best of references given. Address A. Doerflinger, 439 Columbia st., Brooklyn, N. Y.

Shingle-Sawing Machine and Portable Grist Mill Wanted.—Send descriptive circulars, with cuts and prices, Thos. Hoge, Milo, Wetzel county, W. Va.

EXTENSION NOTICE.

Charles R. Harvey, of New York City, having petitioned for the extension of a patent granted to him the 31st day of January, 1864, for an improvement in air-heating furnaces, for seven years from the expiration of said patent, which takes place on the 31st day of January, 1868, it is ordered that the said petition be heard at the Patent Office on Monday, the 5th day of January next.

Improved Brick Molding Machine.

The simplicity of the machine represented in the engraving renders any detailed description unnecessary. The inventor says in brief: "The nature of my invention consists first, in the flat, square, or triangular bar for pulverizing the clay; then the mode of stepping the shaft within the clay box, that is to say the projecting hub on the bed plate with its wooden conical seat in combination with the cavity in the stem of the screw, by means of which the surrounding clay is excluded from the step to prevent the wear, and the screw is brought down near the bed plate to wipe as closely as possible without contact. Thus the throat of the screw gathers within itself a charge of clay which cannot escape except through the openings of the bed plates into the molds beneath. The open portable mold frame with a projecting flange, the mold resting on a single detached plate for a bottom, so that when the mold is thrown on the floor the brick does not come at the same time in contact with the ground because the flanges prevent this result; but the concussion is just sufficient to start the brick when it slips easily from the mold."

The cavity in the center of the screw or sweeping blade incloses the step of the shaft and allows the blade to come clear to the bottom of the mill. The molds are carried from the mill by the rocking bars seen in the engraving driven by the cranks at the top of the machine. It will be noticed that the grinding machinery is geared down so that the expenditure of power will be much less than in some less heavily geared machines. The clay is taken direct from the bank and passed through a pulverizer which reduces it to dust and frees it from stones and other foreign matters. Water is then thrown upon it and it remains in soak all night. This part of the operation is of great importance at the South, as it has all the effect of winter digging. By steam or water power this machine is claimed to produce three thousand bricks per hour, while the labor of one horse will yield eight hundred.

It is the subject of two patents granted to Francis H. Smith, who may be addressed relative thereto, Box 556, Baltimore, Md.

Science Familiarly Illustrated.**The Gordius or Hair Worm.**


Every one who has lived in the vicinity of ponds or streams, must often have seen in the water a worm or snake resembling in appearance a coarse human hair. To the unaided eye the resemblance is perfect, with the exception of motion. It is a common notion that these worms were originally hairs, and that the transformation has been effected in some mysterious way by the action of the water. When a boy, we have frequently dipped them up in buckets, and watched their motions for hours. They are from seven to thirty inches long, and are frequently found in the bodies of beetles, and in moist earth, as well as in the water. Sometimes they are found floating, snarled into a knot or curl, and enveloping a little white mass. This mass contains its eggs, which are agglutinated together, and number millions. When seen on the surface of the earth in dry weather, they are brittle, and if handled will break like a dry twig. A rain, however, or heavy dew, will restore their suppleness. A writer in one of our exchanges thus details his observations made on one of these worms:

"When I first received it, it was coiled up in a close roll at the bottom of the bottle, filled with fresh water that contained it, and looked more like a little tangle of black sewing-silk than anything else. Wishing to unwind it, that I might examine its entire length, I placed it in a large china basin filled with water, and proceeded very gently to disentangle its coils, when I perceived that the animal had twisted itself around a bundle of its eggs, holding them fast in a close embrace. In the process of unwinding, the eggs dropped away and floated to a little distance.

"Having finally stretched it out to its full length, perhaps half a yard, I sat watching to see if this singular being, that looked like a long black thread in the water, would give any signs of life. Almost immediately it moved toward the bundle of eggs, and, having reached it, began to sew itself through and through the little white mass, passing one end of its body through it, and then returning to make another stitch, as it were, till the eggs were at last completely entangled again in an intricate net-work of coils. It seemed to me almost impossible that this case of offspring could be the result of any instinct of affection in a creature of so low an organization, and I again separated it from the eggs and placed them at a great distance, when the same action was repeated.

"On trying the experiment a third time, the bundle of eggs had become loosened, and a few of them dropped off singly into the water. The efforts which the animal then


made to recover the missing ones, winding itself round and round them, but failing to bring them into the fold with the rest, because they were too small, and evaded all efforts to secure them, when once parted from the first little compact mass, convinced me that there was a definite purpose in his attempts, and that even a being so low in the scale of animal existence has some dim consciousness of a relation to its offspring. I afterward unwound also the mass of eggs, which, when coiled up as I first saw it, made a roll of white substance about the size of a coffee-bean, and found that it consisted of a string of eggs, measuring more than twelve feet in length, the eggs being held by a gelatinous substance that cemented them and prevented them from falling apart. Cut-

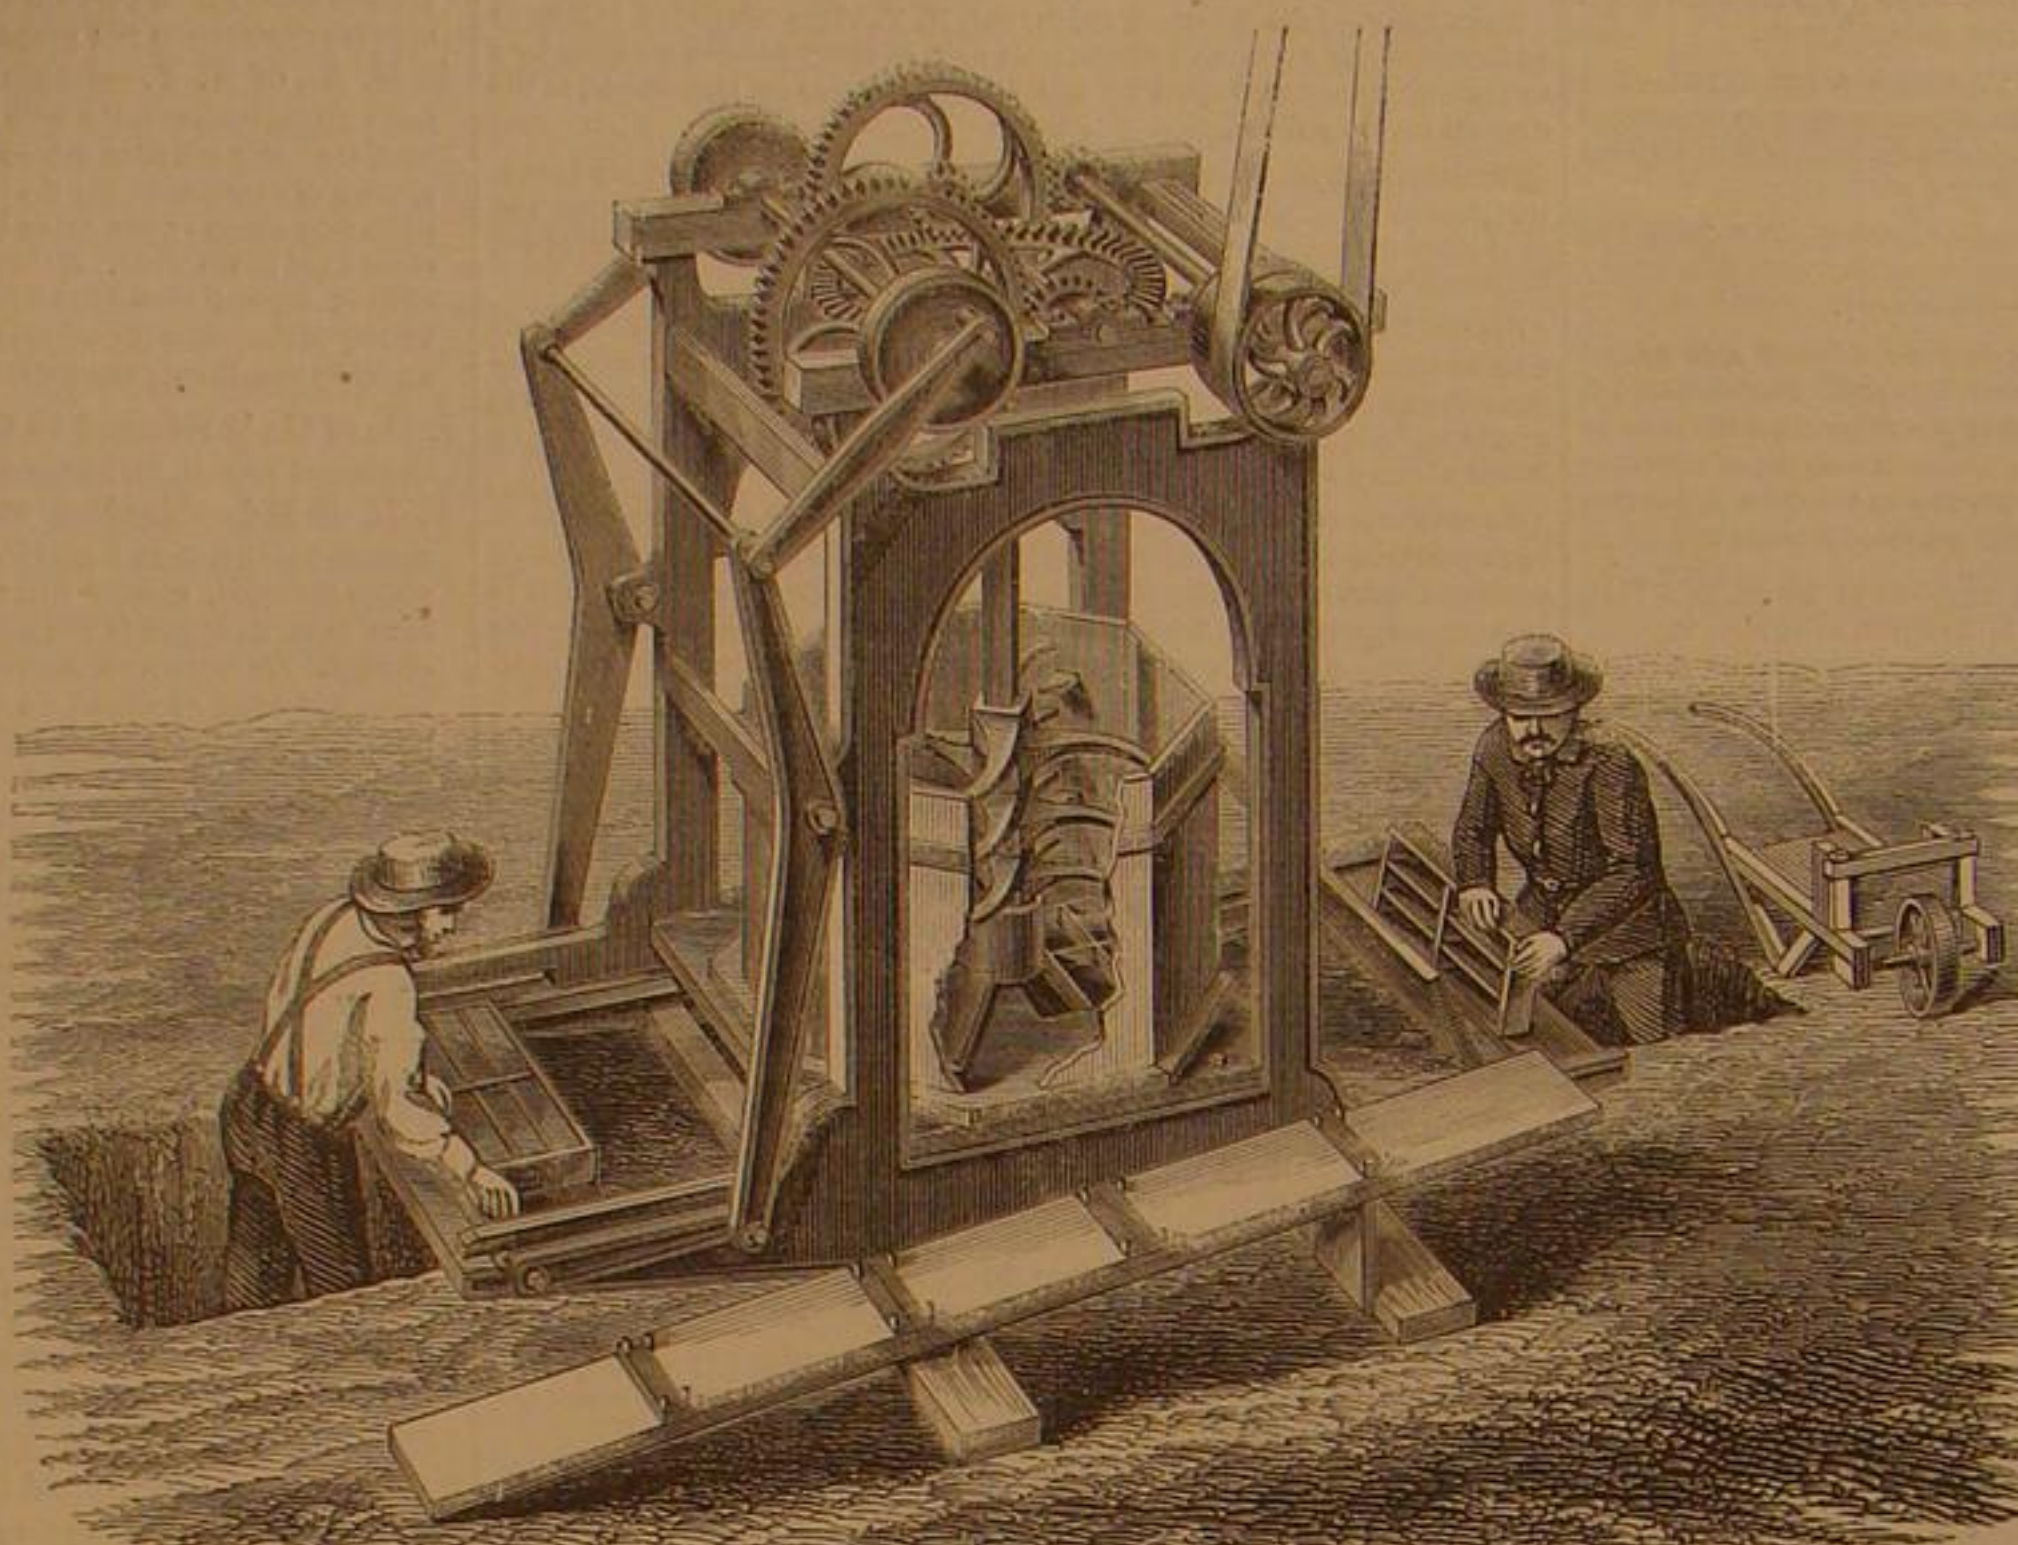**SMITH'S BRICK MOLDING MACHINE.**

ting this string across, and placing a small section under the microscope, I counted on one surface of such a cut from seventy to seventy-five eggs; and estimating the entire number of eggs according to the number contained on such a surface, I found that there were not less than eight million of eggs in the whole string."

WHITE'S IMPROVED MONKEY WRENCH.

The ordinary monkey or screw wrench is one of the most useful tools in the machine shop, factory, mill, stable, or on

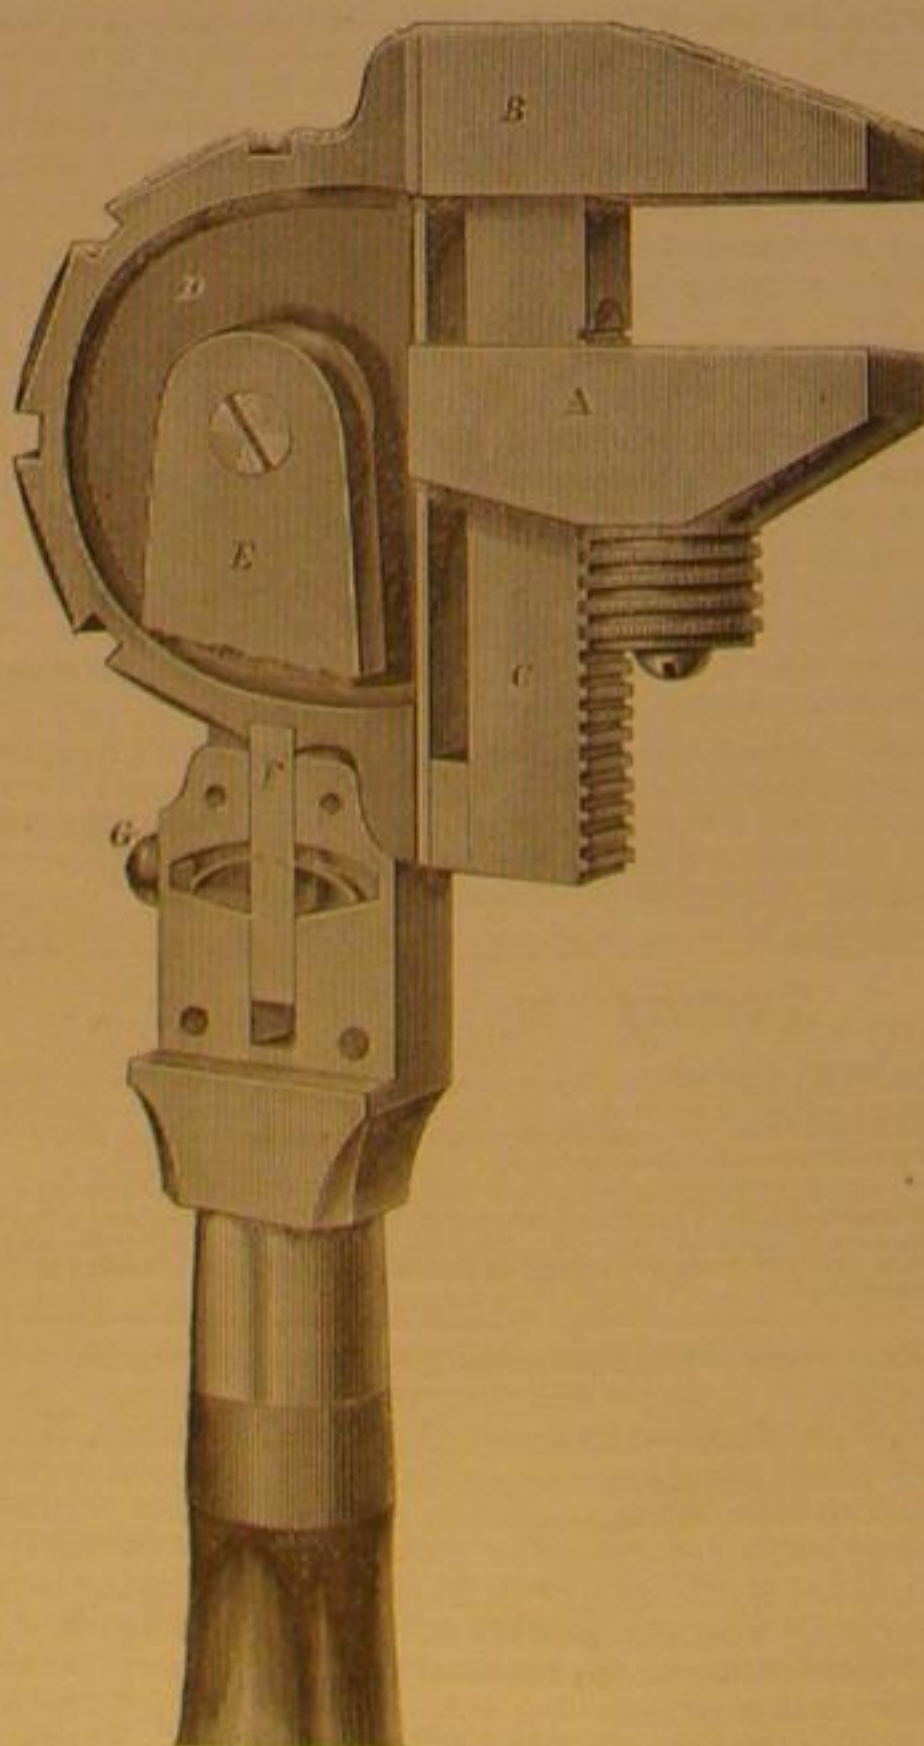

the farm. It can be so readily adapted to all sizes of nuts, and to hexagonal as well as square heads and nuts, that no other single implement will subserve so many useful purposes. The ratchet wrench is slow of action and is not capable of so many adaptations; and it would be desirable if the screw wrench could be made to serve the purpose of the

crooked or S-wrench and some other forms designed for special occasions. Such is the object of this improvement.

The jaws of the wrench are arranged in a similar manner to those on the common screw wrench, the movable jaw, A, being advanced to or receded from the fixed jaw, B, by a nut which engages with the segmental thread cut on the shank, C. This shank is firmly secured to a semi-circular disk, D, which turns on a pivot or screw passing through the arms, E, by which means the jaws may be rotated around half a circle. The periphery of this disk has a number of notches into which fits a spring pawl, F, which is receded from contact with them by a knob, G, to be operated by the thumb or finger. In the engraving a portion of one of the arms is broken

away to show the pawl. From this description the action of the wrench can be easily understood. The jaws may be secured in any position between the two opposite points of a half circle so as to be adapted to the situation of the nut to be turned. Thus the wrench may be used as an ordinary screw wrench, a hook wrench, a straight wrench, or a curved wrench, while the jaws may be set to accommodate any size of nut. Machinists and others who require wrenches will see the advantages of this device.

Patented August 1, 1865 by James White, Cleveland, Ohio. The patent is for sale. Application should be made, personally or by letter to J. H. Beardsley, 119 Nassau street, New York city, or to the inventor, Cleveland, Ohio.

Novel Application of Electro-Magnetism.

The last number of the *Cosmos* contains an article of considerable interest of the various applications of electro-magnetism by Prof. Glasener, of the University of Liège, in Belgium. Among them there is a Chronograph for the measure-

ment of very minute particles of time, and which deserves some description as regards its application to artillery. Suppose it be required to measure the velocity of a cannon ball. For this purpose let a series of targets, consisting of hoops intersected by wires, be placed at given distances. The wires of each hoop communicate with a separate electro-magnetic apparatus, by which an iron pencil-holder is kept in an unvarying position by attraction so long as the circuit is not interrupted. Opposite and close to this pencil-holder there is a cylinder turning on its axis at the rate of four revolutions in a second. Its surface, which is covered with paper, is divided into 500 parts by lines drawn parallel to its axis, so that each part represents one two-thousandth of a second. Its motion is effected by clockwork. Now, whenever the electric current is interrupted the pencil-holder ceases to be attracted and falls on the surface of the cylinder, on which its pencil, therefore, describes a line. Whenever the circuit is completed the pencil-holder is re-attracted and leaves the paper. Let us now suppose a cannon ball to be fired through all these targets, so placed, of course, as to lie in the path of the curve described by the missile. Each time it passes through one of the hoops it snaps asunder one of the wires: the circuit is consequently interrupted, the pencil-holder falls and marks the precise time of the passage. And so on, from target to target, each of which, as we have said, is connected with a separate apparatus. In this way both the space and the time employed in going over it being determined, the velocity, which is the ratio of time to space, is determined also to a fraction of one two-thousandth of a second.

The Brazilian Pebble—Natural Glass.

J. W., R. B., and A. G. A., of Ill., have a dispute they wish us to settle. It is whether "the so-called pebble spectacles are stone, or a superior glass made from a peculiar stone. Are there stones large and clear enough to be ground to make spectacle lens?" We do not care to act as arbiters in disputes, but will furnish the information desired. The lenses are made from a rock or quartz crystal, which may be considered a natural glass. The Brazilian pebble is highly esteemed because it is harder than glass and not so liable to be scratched. It has a lower dispersive power than other pebbles and than many glass lenses. A splendid specimen, spherical and perhaps three inches diameter, is to be seen in a jewelry store in Brooklyn.

PICKWICKIAN ANTIQUARIANS.—An exchange asserts that the Minnesota Historical Society, in their late excursion to Lake Minnetonka, to investigate the remains of the "ancient mound builders"—a race dwelling in this country long before the arrival of the Indians—were successful in finding several human bones, which after a labored discussion proved to be the broken limbs of trees. A supposed skull elicited great attention from its remarkable phrenological development, but a rustic demonstrated to the learned gentlemen that the supposed cranium was in truth a mud-turtle's shell. Several mounds, it is stated, have been prepared and supplied with bones and pieces of broken crockery, for the future investigation of this society.

Scientific American.

MUNN & COMPANY, Editors and Proprietors.

PUBLISHED WEEKLY AT
NO. 37 PARK ROW (PARK BUILDING), NEW YORK.

O. D. MUNN. S. H. WALES. A. E. BEACH.

“The American News Company,” Agents, 121 Nassau street, New York
“The New York News Company,” 8 Spruce street.
Messrs. Sampson Low, Son & Co., Booksellers, 47 Ludgate Hill, London, England, are the Agents to receive European subscriptions or advertisements for the SCIENTIFIC AMERICAN. Orders sent to them will be promptly attended to.
Messrs. Trubner & Co., 60 Paternoster Row London, are also Agents for the SCIENTIFIC AMERICAN.

VOL. XVII., No. 18. . . . [NEW SERIES.] . . . Twenty-first Year.

NEW YORK, SATURDAY, NOVEMBER 2, 1867.

Contents:

(Illustrated articles are marked with an asterisk.)

*Improved Single-Needle Knitting Machine.....	270	Progress of the Pacific Railroad—The System Adopted for Laying the Track.....	278
Period of the Growth of Man.....	271	Restaurants of the French Exhibition.....	278
Editorial Correspondence.....	274	Manufacturing, Mining, and Railroad Items.....	278
Gatling's Gun in Europe.....	274	Recent American and Foreign Patents.....	278
A New Theory of Chemistry—The Galvanic Battery Dissected, and Speculations Concerning Ozone.....	275	Answers to Correspondents.....	279
Cipher Writing—A Universal System.....	275	*Improved Brick Molding Machine.....	280
How to Manage Kerosene Lamps.....	275	The Gordius or Hair Worm.....	280
A Proposed Flying Machine.....	275	*White's Monkey Wrench.....	280
A Correction.....	275	Novel Application of Electro-Magnetism.....	280
That Big Saw Again.....	275	The Brazilian Pebble—Natural Glass.....	280
Lifting Pumps and their Pipes.....	276	Malleable Qualities of Lead.....	281
Paris Academy of Sciences.....	276	The Relative Economy of Anthracite and Bituminous Coal in Steam Boilers.....	281
American Champagne in France.....	276	The Largest Pair of Propeller Engines in the World.....	281
Shell Cameos.....	276	American Institute Fair.....	281
A Cement for Iron and other Substances.....	276	The Musketo Pest.....	282
Editorial Summary.....	276	Patent Claims.....	282, 283, 284, 285, 286
American Toys—Where Made.....	277	Pending Applications for Patents.....	286
Marmalade.....	277	New Publications.....	286
*Meyer's Safety Saddle.....	277		
A Shaft in the Oaks Colliery.....	277		
Europe on the Western Hemisphere.....	277		
Toads.....	277		

MALLEABLE QUALITIES OF LEAD.

Probably scarcely any other metal, not excepting even gold, presents more interesting qualities for investigation than lead. One of those qualities is its malleability, and its quality of being compressed upon itself, the latter a quality for which we have no definite term. If a leaden ball lodges in the bore of a smooth bore or rifle it is almost impossible to start it. We have seen a Colt's pistol, with barrel only six inches long, which had, lodged in it and imbedded one into the other no less than fourteen conical bullets. The one which first lodged was probably propelled by an insufficient charge of powder, not enough to send it out of the muzzle, and the successive charges were not powerful enough to move it. On the fourteenth round the barrel opened longitudinally. Another case occurred in which the bullet of a rifle lodged about midway of the barrel and the rammer was tried repeatedly to remove it without effect. At last a hardened steel rod was driven completely through it, cutting a plug out of its center, and leaving a ring of lead which had to be drilled and reamed out. In a small town in Massachusetts a large rock disfigured the village green, which had been drilled for blasting and a blast repeatedly fired to split it, without success. At length it got to be used as the town gun for firing salutes. A shrewd, thinking mechanic conceived the idea of tamping a charge with lead. He did so and split the obstinate rock into removable pieces.

A large public building was, some years ago, in process of erection in Boston. It was built of granite blocks and the outer seams of the lower courses were closed with lead tamped in with a set and hammer. This work was intrusted to an inexperienced apprentice, who continued to force the lead in until he cracked the stone immediately above the seam and opened the vertical seam in the next course. As the building was between forty and fifty feet high the lead must have raised many tons weight by the simple force of a hand hammer.

In the same city a large ornamental iron fence was erected around a square. The hollow iron posts rested on granite blocks set in the earth, having a cross section of fourteen or fifteen inches. The iron posts were secured to the stone by means of iron rods one and a quarter inches diameter. These were upset and broadened at the lower end and dropped into a hole in the stone about four inches deep, the hole being largest at the bottom. Lead was poured into the hole around the iron bar, the post lowered to place and secured by a nut on the upper end of the bar. Several of these stones were split in setting-up the nut and the lead was found to be nearly as hard and compact as the iron. In this case it could not have been the heat of the melted lead that split the stone, for it would not have been sufficient to produce such a result.

It would seem that this quality in lead might make it useful in quarrying stone. In the city of New York there is a large bed of very fine granite, extending from Thirty-first street on the west side and from Twenty-fourth street in the middle, to Sixtieth street on the north. The material of the Croton Aqueduct was mostly taken from Tenth Avenue near Forty-eighth street. Owing to the contiguity of dwellings and other buildings, blasting, except to a very limited extent, would be dangerous. The usual method of separating the blocks is by inserting wedges of iron cased with sheet iron into quadrangular holes drilled in line a few inches apart which are then driven, gradually and simultaneously, until the mass is separated. The adhesiveness of lead would appear to give it an advantage in this case over the sheet iron

Lead has also the quality of expanding after being closely compressed, or of regaining, in some degree, its original porosity. For this reason pressed leaden bullets are not in favor, because, in time, they expand or swell beyond the limits of the mold or matrix in which they were pressed, and become too large for the caliber of the bore for which they were intended.

THE RELATIVE ECONOMY OF ANTHRACITE AND BITUMINOUS COAL IN STEAM BOILERS.

Theoretically considered, the more volatile combustible (i.e. hydrogen) there is in a coal, the greater will be the quantity of water evaporated per pound consumed; for the reason that the heating power of a fuel is measured relatively by the quantity of oxygen that will enter into combination with its combustible constituents.

Hence a pound of hydrogen, as it combines with three times more oxygen than a pound of carbon, has three times more calorific power; and consequently a coal which contains hydrogen, must be a better steam generator than one which does not, such as anthracite.

It is of course assumed that the furnace is of proper construction to produce perfect (or nearly so) combustion. To insure perfect combustion it is necessary to supply and mix the combustible gases driven from the fuel by the heat of the fire, with a sufficient quantity of air to furnish the necessary weight of oxygen to saturate them; and also that in that portion of the furnace where this mingling of the air with the gases takes place, a sufficiently high temperature is maintained to cause them to combine with the oxygen. If these conditions are not fulfilled, it is almost unnecessary to add that the furnace, instead of being a chamber where the fuel is thoroughly burned, is turned into a gas retort, and an immense proportion of the combustible matter passes up the chimney, and is wasted.

The construction of boiler furnaces, to fulfill the chemical requirements we have mentioned as necessary to thoroughly burn the fuel, and to prevent smoke, if it contains hydrogen, is now so well understood, that it is disgraceful for those using bituminous coal for steam purposes to obscure the landscape with black smoke. In our opinion the prevention of smoke is a proper subject for legislative interference, as regards both stationary boilers and locomotive engines. As to railroads, it should be one of the conditions of future charters that their engines shall not belch forth black smoke; and as for those roads already in operation, the law should compel them, by a good round fine, for any engine seen to smoke, to alter them so as to prevent this nuisance.

We will venture to say that most of our readers have been made as black as chimney sweeps by a ride of even less than fifty miles on a railroad on a hot summer's day. This nuisance, for the most part, is endured by the sufferers without rumbling, on the supposition that it cannot be prevented. This, of course, is a popular fallacy; and when one sees a locomotive tearing along, and belching forth volumes of smoke as black as ink, he is pretty safe in concluding that the managers of that road are either too ignorant or too parsimonious to cause the trivial changes to be made which will effectually put an end to this sooty nuisance.

With that species of coal known as “semi-anthracite,” it is of course considerably easier to prevent smoke and soot than with bituminous. In fact, furnaces of ordinary construction, fired with a little care, can use coal with thirteen or fourteen per cent. of volatile combustible, with scarcely any smoke at all.

In order to show practically the difference in the evaporative power of anthracite and hydrogenous coal, we will give the following experiments, which were made with a semi-anthracite coal of the following analysis, and anthracite of good quality:

Fixed carbon.....	79.64 per cent.
Volatile combustible.....	13.16 “
Moisture.....	0.39 “
Sulphur.....	0.82 “
Ash.....	5.98 “
Weight of one cubic yard, 2,217 lbs.	

The experiment was made in the boiler of a ferry boat, near Boston, doing the same quantity of constant and regular work in both cases—the result was:

Coal, anthracite, consumed.....	47,467 lbs.	93 hours.
“ as per above analysis, consumed.....	36,807 “	“

Difference in favor of semi-bituminous 10,660 lbs.; or, in other words, the semi-anthracite, according to this experiment, had some 23 per cent. more evaporative power than the anthracite, or in the ratio of about 5 to 6.

Other experiments of a similar nature, which have fallen under the observation of the writer, appear to confirm the above results.

No doubt the superior cleanliness of anthracite, and the fact that even if its combustion is not perfect, it is not made manifest by black smoke, are strong arguments in its favor, and will continue to maintain the high reputation which it has so long enjoyed for steam generating purposes; but then we know that with proper management, and suitable furnaces, the evaporation of the bituminous is much greater.

THE LARGEST PAIR OF PROPELLER ENGINES IN THE WORLD.

The direct acting engines for the English iron clad *Hercules* built by John Penn and Sons at Greenwich, near London, are the largest pair of screw engines ever constructed.

They are of the double trunk variety, a style built almost exclusively by the Messrs. Penn. There are two cylinders, each 127 inches in diameter, by 4 feet 6 inches length of stroke of piston; the diameter of the trunks is 47 inches, whose area

being deducted, gives the pistons an effective diameter of 118 inches.

These engines are intended to run 60 revolutions per minute, consequently the two pistons, pass through a volume of 84,600 cubic feet per minute; they are to be supplied with steam by the ordinary horizontal tubular boilers, containing in the aggregate about 1,000 square feet of grate surface; they will be fitted with superheaters. It would seem therefore that these engines are intended to be worked highly expansively, and notwithstanding the comparatively small boiler capacity, the eminent engineer who constructed these monsters promises for them no less than 7,200 indicated horse power. Judging from the performance of many engines of similar style built by this firm we have no doubt that this enormous power will be realized. A comparison between the engines of the *Hercules* and those of the U. S. S. *Wampanoag* cannot fail to show that the planner of the machinery of one of these ships has made a big mistake.

The *Wampanoag* engines are geared and are expected to make 30 turns per minute, the cylinders are two in number and are 100 inches in diameter by 4 feet stroke of piston. Hence the pistons will sweep through a volume of 26,784 cubic feet per minute. So while the *Hercules* has a capacity of cylinder represented by 84,600 cubic feet, the *Wampanoag* has a cylinder capacity represented by only 26,000 cubic feet. In other words, although the eminently successful builder of these big direct acting engines employs over three times more cylinder capacity than Mr. Isherwood does in his “cog wheel” engines, he uses considerably less boiler than that blundering engineer. As a consequence, while the engines of Mr. Isherwood will only work up to some 4,000 indicated horse power, those of Penn will work up to 7,200 indicated horse power. Again the 7,200 horse power engines take up about 8 feet 6 inches, in the length of the ship, less than the 4,000 horse power engines, and their boilers occupy some 20 feet less in the same direction. Thus if the *Hercules* engines were placed in the *Wampanoag*, she would be urged by more than double her present power, and at the same time much less room would be occupied in the vessel by machinery, and, *ceteris paribus*, she would be driven over 18 knots per hour.

It would seem that Penn and other successful builders go ahead just as if the U. S. Navy Steam Blue Books with their “seven tenths cut-off” and non-superheating theories had never been published.

AMERICAN INSTITUTE FAIR.

TOOLS AND MACHINERY.

Horatio Allen of the Novelty Works exhibits a propeller engine of the pendulum variety, although differing in some respects from the ordinary pendulum engine. The cylinder is suspended at its upper end, and projecting across in the line of oscillation is a beam, one end of which carries a connecting rod which drives the feed, and the other end one which drives the air pump. Secured to the lower end of the cylinder is a frame which carries the slides for the cross-head, or rather the sliding box, and oscillates with the cylinder. The crank wrist connects with the sliding box and the combined motions—oscillating, reciprocating, and revolving—are very smooth. A link motion governs the action of the valves. Although this engine is in the exhibition, driven by a belt and not by steam, it is worthy the notice of engineers, although there are some faults of construction which detract from its merits.

There are several drops and hammers which attract considerable attention. A very simple one is that exhibited by Charles Merrell & Sons, 556 Grand street, New York City. It is Goulding & Cheeney's patent with Water's improvement. The drop or hammer is suspended in a frame by a piece of hard wood planking, which is clamped when raised between two rollers on horizontal shafts at the top. The drop is raised and released by the ordinary treadle, which either brings the rollers in contact with the surfaces of the plank or disengages them. The advantages claimed for the wooden plank over a leather belt are durability, rigidity, absolute contact, and direct action. This is the drop under which poor McGowan had his hand crushed, and has been illustrated in these columns.

The Grimshaw Compressed-Air Hammer is a rapid working machine, the blow being given by the compressed air in a cylinder. Its operation, under skillful manipulation, is instantaneous and it is under perfect control. A steam engine drives the machine and compresses the air, the whole apparatus combined in one heavy frame. The cushioning at the end of the stroke can be instantly regulated at will. The air compressor, when not in use to drive the hammer, can be employed to give a blast. The machine can be used as a drop, hammer, pass, punching machine, etc., and can be worked by one man.

Sturtevant's Pressure Blower is one of the most efficient rotary blowers we have ever seen. It seems to require much less power in proportion to the blast delivered than the ordinary fan blower owing to peculiarities in its construction. It is difficult to describe it without diagrams, but mechanics witnessing its operation can readily understand the principles of construction and working. These blowers are manufactured in Boston, Mass. Waltons & Leonard, 58 John street, are the sole agents for New York and vicinity.

The New York Steam Engine Company make quite a display of machinists' tools, consisting of a car-wheel borer, planer, upright drills, shaping machines, bolt cutter etc., the latter a machine that produces a beautiful thread, its capacity ranging from half an inch to two-and-a-half inches diameter. These tools are noticeable for strength and good workmanship rather than for extraneous finish.

Pratt, Whitney & Co., of Hartford, Conn., exhibit one of

their engine lathes with Slate's patent taper attachment, which was illustrated on page 124 No. 8, Vol. XVI, SCIENTIFIC AMERICAN. The lathe at the Fair is sold to the Swedish Government, for which and the Austrian government the firm has done a large amount of work. Being in New York on its way to its destination it was detained for a time for exhibition. Like all their tools, this shows the perfection of finish and accuracy. For boring tapering holes, as well as turning tapers, machinists will acknowledge it to be a valuable tool.

J. A. Fay & Co., of Cincinnati, Ohio, show a fine collection of wood-working machinery. An observable merit in their machinery is its excellent proportions of material, together with good workmanship.

In saws, R. Hoe & Co., and the American Saw Company both of New York city, make fine displays. W. P. Miller, also, of San Francisco, Cal., has a specimen of his adjustable teeth in a large circular saw. Both of these latter have been illustrated in these pages. This department of the exhibition proves that very great attention is now being paid to the perfecting of tools in their details.

The brick machine of D. W. Seeley of Albany, N. Y., illustrated in the SCIENTIFIC AMERICAN page 279, No. 18, Vol. XV., is at work turning out bricks from the raw clay brought in barrels, without the straw, the want of which seemed to be the great annoyance to the Israelitish slaves in Egypt. The rapidity of its operation and the perfection of its products are sufficient recommendations of its utility and general advantages.

One of the curiosities in the exhibition is the machine for putting up tobacco in papers—tin foil. Its operation is a marvel until investigated. The parts exposed to view are few and apparently simple, but like the automaton chess player of Maelzel, the machinery that gives them life is concealed in a box. The tobacco being placed in a sort of hopper, a piece of tin foil and a corresponding piece of paper is placed on a platform when, by the turn of the crank, the envelope is folded into shape, the tobacco forced in, and the paper filled ready for sale and delivery. It can be operated either by hand or power.

We regret that the agricultural department in the south gallery is without attendants, and that the machines are not in many cases furnished either with cards containing names of the exhibitors, or circulars giving a description of operation. Among the agricultural machines are several which seem worthy of notice, but not being furnished with the claims of their exhibitors and no space being allowed for their thorough examination, we are obliged to pass this department by without further notice.

Mr. Linnell, who was so cruelly mutilated by falling into the engine he was driving died on the 18th of October. Mr. McGowan, who lost his right hand under the Merrill hammer is doing well. Being a practical mechanic, depending upon his daily work for his daily support, his case is a hard one. Both these men have, or had, dependent families, and it seems as though the Association ought to donate the proceeds of one day's exhibition to their benefit. If the Board of Managers cannot afford that, let the exhibition be extended one day for this purpose, and a notification to that effect would bring out hundreds, who would not otherwise visit the exhibition.

DEPARTMENT OF THE DWELLING.

Before concluding our notice of this section, there are a few articles of merit yet to notice. The remontoir tower clock, manufactured by G. M. Stevens & Co., of Boston, hourly, at least, attracts general public attention. This clock is claimed to be the most reliable and best timekeeper ever introduced. The escapement is a remontoir action and produces an impulse upon the pendulum which is exactly alike during each and every minute. The agents for this city, Benedict Brothers, also exhibit four regulator clocks with compensating pendulums.

In the cutlery department, Clement Hawkes & Maynard have a fine case of ivory and pearl-handle knives. Two cards of pocket knives, artistically arranged, ranging from the most delicate of penknives to the homelier but more serviceable jackknife, and comprehending over three hundred different styles, are samples of the manufactures of D. F. Smith & Co., of Bronxville, N. Y. A bale of brown cordage in an un conspicuous place, is labelled as specimens of rope made from California vegetable hair, but further information relative to this real curiosity, beyond this simple statement, is unfortunately not forthcoming. Near this bale the Union Fence Company have erected one of their combination fences, which, though made of wood, has all the appearance of stone with the strength of iron. The work on these is all done by machinery, the several parts are snugly fitted, and are driven together with lead and oil, while the neatness, strength and asserted cheapness make this one of the best fences in use.

For a simple article of domestic utility, the combined dust-pan and broom of Clough & Bryant commends itself to favorable notice. The handle of the pan is made hollow and through it slides the broom handle, thus giving to this badge of the tidy housewife a neat and compact form. Equally convenient is Richmond's rubber rack for holding brooms, brushes, canes and whips. The arrangement consists simply of a disk of india rubber having slits perforated in it, so that the handle is grasped and firmly held in its upright position.

There is an imposing display of glass and silver-plated ware exhibited by house-furnishing establishments of the city, but we have not the further space to devote to this department.

DEPARTMENT OF DRESS AND HANDICRAFT.

Although this is one of the most attractive of the seven grand divisions, under which the managers of the Fair chose

to classify the articles offered for exhibition, yet from the nature of the department our report must be somewhat brief and cursory. We might go into ecstasies over the really beautiful specimens of wax flowers and autumnal leaves, which so perfectly mirror nature as to cause a constant succession of rapturized superlatives to flow from the lips of enraptured beholders—but we forbear. Space might be filled by an enumeration of the articles of female adornment displayed in attractive show cases, but such description would hardly fall within the scope of these columns; and, for a like reason, although the subject might not prove so incompressible, we must omit any elaborate notice of goods of gentlemen's wear. Rolls of cloth are there, woolen, cotton and silk, the comparative merits of which must be discussed by the awarding committee only. Of sewing and knitting machines, we have already noticed the more important.

To the non-professional eye, the imposing array of artificial teeth daintily mounted upon velvet cushions, is somewhat appalling, while the cases of dental instruments are to most observers, too suggestive of past or prospective torture to be attractive. There are about three hundred practicing dentists in this city, and although all are not exhibitors here, the profession does not lack for representatives, most of whom claim for their wares points of superiority, which, however, are not peculiarly striking to the general nor even the rectorial eye. We notice that several exhibitors have adopted an impressive method of proving to the world their claims as benefactors of the race, by conspicuously posting duplicate photographs of the same personage: one with sunken cheek and general antique expression, while the other picture, representing the individual provided with a set of the exhibitor's patent improved dentures, would have been accepted by old Ponce de Leon—unacquainted alike with either dentists or photographers—as conclusive evidence of the existence of his long sought rejuvenating spring.

Though thus unceremoniously dismissing this Department, there are several novelties which are worth referring to. The Bangs Williams' News Company, of Providence, exhibit a large and varied assortment of rich fancy boxes for holding handkerchiefs, gloves and jewels, which, although pronounced by most observers French goods, are made in Providence, and are now brought before the public for the first time. The American Kaleidoscope Company have made a decided improvement on this optical toy, and given it something more of importance than it hitherto possessed. As previously constructed, only transparent objects could be shown in it, but by admitting the light so as to be reflected to the eye, opaque objects, such as flowers, insects, and stones, as well as transparent ones, may be used, and being elegantly constructed, the improved kaleidoscope is destined to become very popular.

There are several exhibitors of bronze goods, among which we may note the small fancy bronzes and carte-de-visite mountings of P. Mignot, and the bronze clocks and gas fixtures of the Tucker Manufacturing Company.

Under the second grouping there is a case of vulcanite cravats and bows, by the New York Hard-rubber Collar Manufacturing Co. These and Merritt's scarf and tie-holders—the latter a neat frame or plate whereon can be formed a scarf or tie, without sewing—are conveniences whose virtues are at once apparent to the masculine mind.

The American Fishhook and Needle Company, of New Haven, have a case of hooks of different sizes made entirely by machinery at the rate of two hundred a minute. This company is the pioneer in this manufacture, hitherto all hooks having been made by long and tedious hand processes.

FINE ARTS.

Prang's chromos are almost, if not quite as natural as water colors or oil paintings. Chromo-lithography is the art of painting pictures from stone in colors. The most difficult branch of it—which is now generally implied when chromos are spoken of—is the art of reproducing oil paintings. When a chromo is made by a competent hand it presents an exact counterpart of the original painting with the delicate gradations of tints and shades, and with much of the spirit and tone of a production of the brush and pallet. The impressions from the stone are taken on thick white paper which passes through a heavy press before being used. Among the most beautiful, to our eyes, were Nos. 8 and 10—scenes from the White Mountains, and late autumn in the same beautiful region—from an oil painting by A. T. Bricher. Prang, of Boston, has carried this art to greater perfection than any other publisher in this country.

Hanging low and almost out of sight, we notice a small picture by Clinton Lovellidge, of Brooklyn, N. Y., "Forest Winter Scene." Woodland sounds are ever impressive, and in the mystery of its voices lies much of the fascination of the forest, but the effect of stillness which this scene conveys is almost painful in its intensity. A path on which the snow lies white and untrodden, opens directly through the woods without curve or break to divert the eye, and on either side the gray stems of the trees stand gaunt and weird like grim sentinels. E. H. Nichols, Esq., has a large painting "Scene on the White Mountains," the foreground is particularly good, and the rocks are very true to nature. The U. S. Machinery Carving Co., corner of Second avenue and 22d street, exhibit machine carving on wood and marble. There are many specimens of this carving, and those on wood are much superior to the efforts on marble. Among the latter are some alto and basso-reliefs, and some bordering in intaglio; but there is not distinctness and clearness enough of outline; they have the smooth effect of casting, and we miss the sharply defined yet delicate and firm mark of the chisel. But for ornamentation in wood and all decorations of that kind, for cabinetware picture frames, and the numerous uses to which woods of different kinds are put—it is an adaptation of

machinery of great value. The pattern or device once made, any number of duplicates can be carved directly from the block of wood, and the pattern can be placed at any desired angle, thus producing different effects from one pattern.

James Prentice, optician, 164 Broadway, New York, shows a handsome case of mathematical and drafting instruments, and the Willard Manufacturing Co., 684 Broadway, a collection of camera tubes and lenses. Both of these collections are worthy notice.

The Musketo Pest.

The cool weather we are now enjoying has not yet rid us of the pest of the musketo; any suggestion therefore for defending ourselves from their attacks will be welcome. The Philadelphia Ledger says:

"Of the various remedies proposed, none are so efficacious as the use of musketo netting in the windows and around the beds at night. But as this is not always practicable or convenient, we must resort to other means for bidding defiance to our enemies. Of these, the best is the smoke produced by burning a small quantity of what is technically called, 'Persian Insect Powder.' This consists of the powdered flowers, and perhaps young stems and leaves, of a plant known to botanists as *Pyrethrum caucasicum*, a kind of chamomile cultivated largely in Germany, resembling the common garden chamomile in many of its properties, and of which all the various 'insect,' 'magnetic' and 'fly' powders are wholly or entirely composed. For use against musketoes, a small quantity—about what could be heaped upon an old-fashioned silver dollar, if any of our readers remember the size of that coin—is placed at bed time on a plate, and the top of the heap touched with a lighted match until it shows a red coal. The mass will then smoulder gradually away, filling the room with a light smoke, which narcotizes the musketoes and keeps them quiet for several hours, after which it may be necessary to repeat the operation. The evolution of the smoke will be facilitated by stirring the burning powder from time to time, so as to secure perfect combustion, although this is not absolutely essential. The powder may be also twisted up in a light cylinder of paper, and burnt in that form. Its use, as described, against musketoes, gnats, etc., has long been known to the Chinese and Tartars, who mold it into sticks and burn in their tents and dwellings, which would in many cases be uninhabitable without it. The same substance, in its powdered state, is also used to great advantage in preventing the attacks of roaches, bedbugs, fleas, ants, etc., and in keeping flies off the dining tables. It is perfectly harmless to mankind, and may be eaten as freely as chamomile, and the smoke is not at all injurious. This latter, it may be mentioned in addition, has much the same effect on flies as on musketoes—not destroying them, but merely throwing them into a stupor.

"Carbolic acid, poured upon a rag and hung near the bed at night, also acts very favorably, by its powerful odor, in keeping away musketoes. This is, however, more disagreeable to most persons than the smell of the burning insect powder, which resembles that from a mild cigar."

OFFICIAL REPORT OF PATENTS AND CLAIMS

Issued by the United States Patent Office,

FOR THE WEEK ENDING OCTOBER 15, 1867.

Reported Officially for the Scientific American

PATENTS ARE GRANTED FOR SEVENTEEN YEARS the following being a schedule of fees—

On filing each caveat.....	\$10
On filing each application for a Patent, except for a design.....	\$15
On issuing each original Patent.....	\$20
On appeal to Commissioner of Patents.....	\$50
On application for Reissue.....	\$50
On application for Extension of Patent.....	\$50
On granting the Extension.....	\$50
On filing a Disclaimer.....	\$10
On filing application for Design (three and a half years).....	\$10
On filing application for Design (seven years).....	\$15
On filing application for Design (fourteen years).....	\$20

In addition to which there are some small revenue-stamp taxes. Residents of Canada and Nova Scotia pay \$500 on application.

pamphlets containing the Patent Laws and full particulars of the mode of applying for Letters Patent, specifying a set of model required, and much other information useful to Inventors, may be had gratis by addressing MUNN & CO., Publishers of the Scientific American, New York.

69,739.—CORN PLANTER.—Geo Abbott, White's Corners, N.Y.

1st, I claim the catch, L, and spring rod, K, in combination and arrangement with the gearing and planting apparatus of a corn planting machine, for the purpose and substantially as described.

2d, The planting leg, G, connected with the driving wheel by means of appropriate gearing, in such manner that the leg may be caused to move up by the mechanism, and let fall by its own gravity and plant hills at intervals, substantially as set forth.

3d, The seed gatherer, H, arranged with the seed box, O, partition, O', and table, B, for the purpose of picking up and carrying the requisite number of kernels to form a hill and depositing the same in the planting leg, substantially as described.

4th, The valve, L, placed at the foot of the planting leg and operated by means of the rod, V, lever, V2, and cam, F1, for the purpose and substantially as described.

5th, The spring rod, K, operating upon the clutch wheel, I, to advance or retard the planting gear, substantially as set forth.

6th, The hill marker or projection, N, near the foot of the planting leg, G, by which each hill is individually marked, substantially as set forth.

7th, The shield, P, placed in this seed box around the feed slide, for the purpose and substantially as described.

8th, The cam wheel, E, by which a planting leg and marker and a seed gatherer, either or all, may be operated, for the purpose and substantially as described.

9th, The vertical slide or seed carrier, H, arranged with the seed box, O, partition, O', and table, and operated by the cam, F2, for the purposes and substantially as set forth.

10th, The dotted screw joint, T2, as a means of connecting the pendant, T1, to the overhanging bar, T, for the purpose and substantially as described.

69,740.—MACHINE FOR MAKING KEYS FOR BOLTS.—Nathan Adams, Altoona, Pa.

1st, I claim the device for cutting the bar, consisting of the screw, screw lever, F, die, B, and cutter, H, all made and operating substantially as shown and described.

2d, The combination of the gauges, h, with the cutter, H, die, B, and cam, n, on lever F, substantially as set forth.

3d, The spring, k, provided with the pin, l, and cam, y, in combination with the bar, D, substantially as described for the purpose specified.

4th, The construction and arrangement of the dotted slide, A, pivoted to the bar, D, a m, e, pivoted bar, D, dotted rod, F, lever, e, and pin, n, die, B, l, a m, e, pivoted bar, D, dotted rod, F, lever, e, and pin, n, cutter, H, stationary bridge, G, cage, B, setting, K, having a screw, e, all operating as described for the purpose specified.

5th, The cam wheel, E, by which a planting leg and marker and a seed gatherer, either or all, may be operated, for the purpose and substantially as described.

6th, The vertical slide or seed carrier, H, arranged with the seed box, O, partition, O', and table, and operated by the cam, F2, for the purposes and substantially as set forth.

7th, The dotted screw joint, T2, as a means of connecting the pendant, T1, to the overhanging bar, T, for the purpose and substantially as described.

8th, The cam wheel, E, by which a planting leg and marker and a seed gatherer, either or all, may be operated, for the purpose and substantially as described.

9th, The vertical slide or seed carrier, H, arranged with the seed box, O, partition, O', and table, and operated by the cam, F2, for the purposes and substantially as set forth.

10th, The dotted screw joint, T2, as a means of connecting the pendant, T1, to the overhanging bar, T, for the purpose and substantially as described.

raised track upon the branch track, as herein set forth for the purpose specified.

34. The combination of the weighted or drop levers, H, with the suspended frame, E, of the car, substantially as herein shown and described and for the purpose set forth.

35. The combination of the operating levers, J, with the weighted levers, H, and with the frame, E, of the car, substantially as herein shown and described and for the purpose set forth.

4th. The raised and flanged guide block, K, constructed as described, connected with the rails of the track at the point where the branch track leaves the main track, substantially as herein shown and described and for the purpose set forth.

5th. The combination of the guide block, L, with the rails of the track at the point where the branch track leaves the main track, when used in connection with the depressed rail and deepened track, substantially as herein shown and described and for the purpose set forth.

69,743.—ARTIFICIAL LEATHER FOR FLOOR COVERINGS.—Stephen M. Allen, Woburn, Mass.

1st. I claim the process of making by combining pulped or ground tanned leather scraps with vegetable fiber, and pulped untanned animal skins, to be used in the manufacture of floor coverings or carpets, substantially as before described.

2d. Sheets made by combining pulped or ground tanned and untanned animal fiber or scraps with vegetable fiber, further combined with bullock's blood, brine, pulped and run off into sheets, substantially as before described and for the purposes specified.

3d. I claim the stuffing, painting, staining, or printing, in the manner and for the purposes specified, sheets made by combining tanned scrap leather and vegetable fiber with untanned scraps of hides, or with the further combination of bullock's blood or brine, manufactured substantially in the manner and for the purposes set forth.

4th. As a new article of manufacture, a floor covering or carpet made by first forming a sheet of leather scraps and vegetable fiber combined with untanned scraps of hides, or with the further combination of bullock's blood or brine, the whole manufactured substantially as herein set forth.

69,743.—CULTIVATOR.—A. H. Allison, Charlottesville, Ind.

1st. I claim the axle, d, in combination with the C, when constructed and arranged as and for the purpose herein set forth.

2d. The beams, D, D, the blocks, H H, the rods, g, g, and the disks, h, the whole constructed and operating substantially as herein specified.

69,744.—SAW MILL.—Leonard Anderson, Painesville, Ohio.

1st. I claim, 1st. The combination in the frame, A, of the vertical guides, C, and diagonal guides, G G, operating substantially as and for the purpose herein specified.

2d. The vertical slides, C, when used to guide and carry the head of the saw, and at the same time to carry or support the jaws of the saw guides, N, N, substantially as and for the purpose herein set forth.

69,745.—SAFETY VALVE FOR OIL STILL.—Samuel Andrews, Cleveland, Ohio.

I claim the herein described safety valve constructed and applied to oil stills, substantially in the manner as and for the purpose set forth.

69,746.—WINDOW SASH FASTENER.—H. G. Arnolds, Rochester, N. Y.

I claim a sash lock composed of bolt, H, tumbler, G, and notched plate, arranged as and for the purposes set forth.

69,747.—PISTON PACKING.—Mifflin W. Bailly, Westchester, Pa.

I claim spiral spring, S, catch spring, C, applied to piston heads for pumps or any kind of engines, when combined with the packing of said piston head, for the purpose and in the manner above set forth and described.

69,748.—ASH SIFTER.—David W. Barker, New Haven, Ct.

1st. I claim, 1st. In combination with the case, A, and sieve or netting, B, the beaters, D, operating substantially in the manner herein set forth.

2d. In combination with the beaters, D, the handle, E, and case, A, I claim the protecting flange, a.

3d. The combination of the plates, m and n, and sleeve, l, with the beaters, D, and netting, B, when constructed and arranged as and for the purpose herein set forth.

69,749.—CART SADDLES.—John Bea, Newark, N. J., assignor to himself and Timothy D. Gladston, Bonton, N. J.

I claim, 1st. The plates, b, b, attached to the bar or bow, A, one at each end, in combination with the plates, C, C, having holes, c, made in them, and hanger or other flexible material attached, which are stuffed to form pads, B, substantially as shown a, d described.

2d. The straps, D, attached to the saddle tree between the ends of the bar or bow, A, and the plates, b, b, when said straps are applied to or used in combination with a cart saddle constructed in the manner substantially as herein shown and described.

69,750.—CULTIVATOR.—H. Bean, Schuylkill, and J. D. Tyson, Lower Providence, Pa.

I claim, 1st. The combination with the main frame, A, of the levers, D, and brace rod, d, arranged to operate as shown and described.

2d. The sliding bar, I, provided with the cord, F, and chains, l, or their equivalents, when arranged to operate as and for the purposes set forth.

69,751.—WASHING MACHINE.—D. C. Bernhardt and S. F. Houston, Charlotte, N. C.

We claim the frame, C, having rollers, D, and supported by the springs, when the same is in combination with an inclined bar or frame having a roller, and the whole is constructed, arranged, and operated substantially as described.

69,752.—PROCESS OF OBTAINING USEFUL FIBERS.—Dana Rickford, Boston, Mass.

I claim, 1st. The preparation of the fiber of the above named weed, substantially as before described and set forth.

2d. The making of the pulp or fiber with rubber and other gums, also the treating of velvet plush and other articles, as described.

69,753.—DEVICE FOR LOCKING DOORS AND WINDOWS.—A. H. Boyd, Rockville, Mass.

I claim the system of bolts so connected and arranged that all the bolts may be simultaneously operated from one point, both to lock and unlock each bolt, also having an independent provision for operating it from the inside of the room, all substantially as set forth.

69,754.—SHOE HOLDER.—A. N. Breneman, Lancaster, Pa.

I claim the construction and combination of the front piece, A, and back piece, B, united by a hinge, C D E, in the manner and for the purpose specified.

69,755.—COMB.—James H. Briggs, Brooklyn, N. Y.

I claim the connector, B, constructed as described, when provided with right angular flange, a, fitting into longitudinal grooves cut into the comb, A, as herein set forth, for the purpose specified.

69,756.—COMBINED PUMP AND MEASURE.—J. M. Brooks and Perry Munson, Independence, Iowa.

We claim the arrangement of the scale race, D, segmental piston, G, and piston, B, in combination with the cylinder, A, nozzle, J, and faucet, H, substantially as and for the purpose set forth.

69,757.—CARRIAGE WHEEL.—Reuben Brooks, Jr., Rockport, Mass.

I claim, 1st. The metal clamp, C, constructed as described from a plate of metal, provided with the central hole, a, for the passage of the tenon of the spoke, the sides of said clamp bent around the joints of the felts, a flush with the side and tread and secured to the end of the tenon of the spoke by means of the holes, b, fitting therein as herein set forth, for the purpose specified.

2d. Joining the ends of the felts of carriage wheels at the end of a spoke by means of the clamp, C, constructed as described, in such a manner that the tenon of the spoke shall pass through the hole, a, in said clamp, and be firmly secured therein by the pressure of the ends of the felts, as herein shown and described.

3d. Supporting the felts by means of the shoulder of the spoke bearing against the outside of the plate, C, and firmly securing the ends of the felts by means of rivet bolts passing through the holes, c, c, in said clamp, substantially as described, for the purpose specified.

4th. The insertion of rivet bolts in the holes, c, c, through a clamp securing the ends of the felts of carriage wheels, for the purpose of tightening said felts, substantially as herein shown and described.

69,758.—PUMP.—George Bruce, Corydon, Ind.

I claim the cylinder, A, piston heads, C, cam grooved disk, H, and connecting rods hinged to said cam groove, when all are constructed and arranged to gether substantially as and for the purpose specified.

69,759.—DUMB WAITER.—F. B. Bryson, Newcastle, Pa.

I claim the arrangement of a dumb waiter for passing up through a floor of an upper room and the spring catch operated by the rod, h, in combination with the weight, g, and the spring, B, substantially as and for the purpose herein set forth.

69,760.—HUB AND AXLE FOR VEHICLES.—D. M. Buckhout, Mount Kisco, N. Y.

I claim the cast metal hub provided with the circular chamber, b, and the mortise, f, to receive the tenons of the spokes, the projections, h, and the plate, G, to screw on the periphery of the chamber, b, in combination with the boxes, F F, fitted within the chamber, b, and the collar, C, and V-shaped flange, D, on the axle, A, all arranged substantially as shown and described.

I further claim the arm, A, fitted on the axle, B, and secured by set screws, a, substantially as shown and described.

69,761.—HAY SPREADER.—G. E. Burt, Harvard, Mass.

I claim, 1st. The spreader, H, constructed and arranged substantially as described for the purposes set forth.

2d. The arrangement of the forks, J J, the arm, k, the shafts, a, a, and P, substantially as described and for the purposes set forth.

6th. The combination of the bent lever or arm, V, and rod, W, with the rake shaft H, and frame of the machine, substantially as herein shown and described and for the purpose set forth.

7th. The arrangement of the levers, J, clutches, G D, shaft, E, rods, U, rollers, F, and shafts of wheels, B, as herein described for the purpose specified.

69,763.—VAPOR BATH.—M. B. Carleman, Chicago, Ill.

I claim, 1st. The cylinder or vessel, H, when divided into an upper and lower chamber by the block, K, substantially as and for the purposes specified.

2d. The reservoir or cup, J, when provided with a stop cock, I, in combination with the vessel, H, substantially as specified.

3d. The block, K, when provided with the recess, e, and one or more lateral passages, f, substantially as described.

4th. The vapor generator, H, when provided with the block, K, in combination with the pipe, G, constructed and operating substantially as shown.

5th. The cover, N, when provided with the opening of air, K, and the lappets, O, constructed substantially as and for the purposes specified.

6th. The combination of the generator, H, cup, J, block, K, with the chair or couch, A, B, and cover, N, substantially as and for the purposes specified.

69,766.—DRAPERY HOOK.—Edwin Carrington, West Meriden, Conn.

I claim the herein described drapery hook formed by an upward inclined slot, d, opening into a recess, e, in the metal of larger diameter than the width of the slot and formed upon a base so as to be secured, substantially as specified.

69,767.—ROPE OR LINE HOLDER.—A. J. Chase, Boston, Mass.

I claim, 1st. The combination with the supporting plate or bracket, c, and stud or curved projection, f, of the swivelled clamp, d, under the arrangement for operation as set forth.

2d. The combination with the bracket, c, curved projection, f, and swivelled clamp, d, of the plate, b, and screw, or equivalent fastening device, formed in one piece with said plate, substantially as and for the purposes herein shown and set forth.

69,768.—BLANKET FASTENER.—L. C. Chase, Boston, Mass.

I claim, 1st. The arrangement of stud, c, and plate, b, in connection with each other and also with loop, d, when fastened to a blanket by means of shield, a, and lugs, e, f, substantially as and for the purpose described.

2d. A and in combination with the strap, g, dotted at b, when fastened to the blanket between shield, a', and twin washer, j, by rivets, c', c', as and for the purposes described.

69,769.—COMPOSITION FOR SAUSAGES.—J. L. Chevalier, Newark, N. J.

I claim in the preparation of sausages the combination of materials herein specified about in the proportion, as set forth.

69,770.—DEVICE FOR TURNING THE LEAVES OF BOOKS.—Cyrus C. Clapp (assignor to himself and R. M. Burdick), Hartford, Conn.

I claim, 1st. Is a leaf-turning device the combination of the pedal, r, shaft, s, arm, t, spring pawl, u, ratchet, n, for holding or releasing the wheels, l, substantially as described.

2d. I claim the clips, l, with the cord, s, secured loosely in the holes, 2, of the arms, i, substantially as and for the purpose described.

69,771.—TRACE FASTENING.—Lucius C. Clark, Plantsville, Ct.

I claim the cock eye, A, the guide or fastener, C, when attached to the whiffletree, B, the whole arranged and used substantially as described.

69,772.—VALVE FOR STEAM ENGINES.—James Colbath, Worcester, Mass.

I claim the combination of the piston, B, constructed as described with the cylindrical piston valve, D, operating as and for the purpose set forth.

2d. The enlarged recesses, q', near the ends of the piston valve, D, in combination with the apertures, r, r', communicating with the spaces, o, o', in the steam chest, as and for the purpose specified.

69,773.—SASH FRAME.—J. E. Crowder, Wheatland, Iowa.

I claim in a sash frame facing the meeting rails, A, of each sash with metallic trough-shaped lips, B, B, so that the tongue of each will enter the groove of the other when both sashes are closed, substantially as and for the purpose set forth.

69,774.—SCALER.—S. W. Cox, New Haven, Conn.

I claim a scale for weighing letters, etc., constructed so as to operate substantially as described.

69,775.—KNITTING MACHINE.—Thomas Crane, Fort Atkinson, Wis.

I claim the application of pressure to the work at a point which is directly beneath each needle for the purpose of holding down the loops last formed during the ascent of the needles thus maintaining such a condition of the loops as will ensure their being cast off from the needles with certainty, substantially as described.

2d. The pressure bars, j, applied to a sliding frame, G, or its equivalent, which moves in concert with the yarn carrier, g, substantially as described.

3d. Providing for moving the device which holds down the work to one side of the jacks when not required to work between the jacks, substantially as described.

4th. The combination of one or more pressure bars, j, or their equivalent, with one or two straight rows of needles, substantially as described.

5th. Extending the ends of the jack frame beyond the ends of the rows of jacks so as to admit of the removal of bars, j, longitudinally from between the jacks, substantially as described.

69,776.—KNITTING MACHINE.—Thomas Crane, Fort Atkinson, Wis.

I claim the employment of spurs or combs arranged and operating substantially as described for the purpose of holding the work in proper position during the ascent of the needles.

2d. The notched plates, J J, in combination with levers, p, p, or other equivalent means for moving the allotted bars, G G, and the comb spurs, substantially as described.

3d. In combination with a knitting machine having one or two straight rows of needles, I claim holding the work down in place during the ascent of the needles by a device or devices arranged beneath the needle b, d, substantially as described.

69,777.—ANIMAL TRAP.—John Curtis, St. Charles, Minn.

I claim the combination of the sliding gate, C, springs, D, lever, E, wire loop, H, cord, I, and forked rod, J, or its equivalent, with each other and with the box, A, substantially as herein shown and described and for the purpose set forth.

69,778.—HOSE COUPLING.—M. S. Curtis, New York City.

I claim securing the parts, A and B, of the coupling to each other by means of the sliding blocks, C, substantially as herein shown and described.

2d. Operating the sliding blocks, C, by means of eccentric grooves formed in the movable part, D, of the coupling, substantially as herein shown and described.

69,779.—BED BOTTOM.—W. F. Dougherty, Mt. Pleasant, Iowa.

I claim the clevis, E, as constructed and arranged in combination with the spring, G, and hook, C, substantially as described and operating as set forth.

69,780.—BROOM CLAMP.—Justus Day, Holley, N. Y.

I claim the employment of caps or blocks, M, M, attached outside the clamp and leaving the slot or space, D, for the winding of the wire, as herein set forth.

69,781.—ARCH BARS AND SUPPORTS FOR CONSTRUCTING FURNACES FOR EVAPORATING PANS.—Gale S. Deane, Grand Rapids, Mich.

I claim the bars, A and C, constructed substantially as herein shown and described for the purpose of supporting evaporating pans upon arches.

2d. The opening and air, D, constructed substantially as herein shown and described and for the purpose set forth.

69,782.—STEAM GAGE COCK.—T. B. Dexter, Lynn, Mass.

I claim a gage cock provided with the double headed valve, c, arranged to operate in combination with the valve seats, m and n, located at opposite ends of the chamber, B, substantially as shown and described.

69,783.—ALLOY FOR JOURNAL BOXES AND OTHER PURPOSES.—G. W. Dismas, Chesterville, Ohio.

I claim a composition for journal boxes, bearings and other mechanical purposes, composed of copper, brass, tin, lead, iron, nickel, and tin, as herein described and for the purpose specified.

69,784.—APPARATUS FOR SEPARATING GOLD, ETC.—William F. Dyal, Georgetown, D. C.

I claim in the series of chambers or traps, e, so constructed and arranged that greater freedom of egress is afforded in each successive chamber, whereby the velocity of the current is increased and the heavier particles are deposited successively therein according to their specific gravity, substantially as and for the purposes set forth.

2d. The combination of the lever, A, in combination with the iron, e, of the sway bar when such iron is extended and so constructed as to furnish a support for the reach in all positions substantially as and for the purposes mentioned.

69,790.—FURNACE FOR STEAM BOILERS, ETC.—H. K. Foote, Oil City, Pa.

1st. I claim the combination with a furnace of the retort, A, constructed substantially as described when arranged to be used in connection therewith for the purposes set forth.

2d. The combination of the arrangement substantially as described of the retort, A, within a furnace and connected to the boiler by the pipe, F, and with the reservoir, H, as described.

3d. The admixture of air by means of an air pump or its equivalent with the gases obtained from the decomposition of steam by means of the heated carbon in the retort before ignition when used in combination with an ordinary furnace substantially as described.

4th. The admixture of the vapor of hydro-carbon in the manner described with gases obtained from the decomposition of water or steam in the furnace described for the purpose of generating heat in connection with the furnace of steam boilers substantially as herein described.

69,791.—DAMPER.—I. L. Frankem, Indianapolis, Ind. Antedated Sept. 14, 1867.

I claim a draft regulator having tube, A, conical, B, rod, D, and a series of cut-offs, as described, substantially as herein specified.

69,792.—PUMP.—W. A. Fry, Worcester, Pa.

I claim the within described body of a pump composed of the three detachable sections, a, a, and a, connected together and inclosing passages and chambers all substantially as described.

69,793.—BUCKLE.—J. S. Gaston, Lyons City, Iowa.

I claim the buckle frame, E, and stops, D, D, when constructed arranged and operating substantially as and for the purposes set forth.

69,794.—HAY RAKER AND LOADER.—Austin Godfrey, Dupage, Ill.

I claim the adjustable rake, a, a, in combination with the shoe, h, h.

2d. The revolving cylinder, e, in combination with the adjustable rake, a, a, shoe, h, and elevator, f, f, when constructed and operating in the particular manner and for the purposes set forth.

3d. The frame, l, with its fasteners to the main frame, b, as set forth in combination with the cylinder, e, and rake, a, a, and reach or fastener, g, when constructed and operating conjointly in the particular manner set forth.

69,795.—CHURN.—M. C. Gordon, Knightstown, Ind.

1st. I claim the dash, C, with tubes, D D' D'' D''' etc. Fig. 2 with gradually tapering diameters by means of which dash and tubes the milk is forced upward in jets and the globules containing the butter broken and thereby the separation of the butter rapidly and effectually accomplished substantially as and for the purpose set forth.

2d. The dash, C, tubes, D D' D'' D''' etc. Fig. 2 in combination with breaker, b, b, Fig. 2 so arranged that the milk when forced in jets through tubes, D D' D'' etc., in dash, C, is violently thrown against the breaker, b, and the breaking of the globules of milk and the separation of milk and the butter therefrom is rapidly and effectually accomplished substantially as and for the purposes set forth.

69,796.—MEDICAL COMPOUND.—D. C. Gould, Sterling, Ill. (assignor to himself, Elizabeth A. McCartney and Ephraim F. Brock.)

I claim a medical compound composed of creosote, sulphuric acid, tincture of opium, tincture of Kiao and sulphuric ether combined and prepared substantially as specified.

69,797.—APPARATUS FOR COOLING LIQUIDS.—Marcus Gould, New York City.

1st. I claim the channel, A, in combination with the air passages, C, either with or without the water passages, B, as and for the purposes specified.

2d. The air passages, C, and the chimney, D, when arranged and operating with the channel, A, and water passage, B, substantially as described and for the purposes specified.

69,798.—HEAT-RADIATING ATTACHMENT FOR STOVE PIPES.—John Gruber, Warsaw, Ind.

I claim a combination of racks, B, B, plunger, P, cap, M, flange, n, and rod, D, arranged to operate the damper cones, F G H, substantially as and for the purpose set forth.

69,799.—PANEL TABLE.—J. G. Greene, Port Henry, N. Y.

I claim the combination of the sliding pivoted panel, B, with the grooved frame, A, in which it works and with the top or cap, D, of the article or casing substantially as herein shown and described and for the purpose set forth.

69,800.—COMBINED DOOR PLATE AND LETTER BOX.—J. T. Green, Marquette, Wis.

1st. I claim the door plate, C, provided with sliding panels, b, b, in combination with panels, a, a, substantially as and for the purpose set forth.

2d. The letter box, B, provided with the serrated guard plates D E, door, F, and inclined bottom, h, in combination with the door, v, slot, B, and plate C, all arranged and operating substantially as and for the purpose herein set forth.

3d. The combination of the door plate and register provided with the spring, c', and mail box provided with protectors all arranged combined and operating as and for the purpose set forth.

69,801.—CULTIVATOR.—Dan Gupta (assignor to himself and H. N. Mosely, Elgin, Ill.)

I claim the elastic or spring shovel, B, in combination with wedge or key, L, substantially as and for the purpose set forth.

69,802.—SELF-ACTING FLY FAN.—W. D. Harrell, and H. M. Hall, Osgood, Ind.

1st. We claim the arrangement of base, A, stud shaft, B, and revolving frame, C, furnished with the distinct sets of clock work, for reciprocating and horizontally rotating motion of one or more fans either singly or combined as set forth.

2d. The provision of the hinged connections, of the fans arms for the purpose stated.

3d. In combination with the object of the first claim we claim the stops, H and Q, for arresting the rotary and vibrating motions of the fans either jointly or severally.

69,803.—GARDEN FLOW CULTIVATOR.—C. A. Harris, Austin, Ark.

I claim the peculiar combination of the several parts forming a valuable and efficient garden cultivator or hand plow, set forth in accompanying drawings and described in specification whether constructed of wood, metal, or any other material substantially the same or answering the same purpose.

69,804.—WAGON JACK.—T. S. Harris, Lockport, Ill.

I claim the peculiar and particular combination and arrangement of the parts described as and for the uses and purposes set forth.

69,805.—CARRIAGE TONGUE HOLDER.—Thompson Heaton, Farmington, Ill.

I claim the following only viz, the metallic staple and roller or lining in upper end of leather holder with the form of the holder all in the combination and for the uses herein substantially as set forth.

69,806.—HOUSE FOR PRESERVING FRUITS AND OTHER ARTICLES.—N. Hellings, Philadelphia, Pa.

I claim the arrangement of the walls, floors and ventilating apparatus as above described, the use of wooden surfaces with non-conducting or poor conducting felts or blank spaces between all inner surfaces and the outer walls or the ceiling, the arrangement of ventilating entrances at the level of the ice floor with hatches opening down to the storage rooms and enclosed spaces to carry off bad air through the mass of ice upward when it is light air and downward out at the bottom of the entrance doors when it is carbonic acid gas, or like heavy air, as described above the light air passing through the upper space above the ice and thence out at the windows of the observatory.

And I claim the arrangement of the ice floor as described the arrangement to prevent dripping from this floor, the open space between the joints on which the iron floor lies the copper covered

ing, L, and with the frame or bar, E, substantially as herein shown and described, and for the purpose set forth.

69,814.—CROSSING FOR STREET RAILWAYS.—Chas. W. Jones, assignor to himself and Hiram W. Stout, Philadelphia, Pa.
1st, I claim a crossroad plate, E, combined with the rails of a street railway at the intersection of the same, substantially as described.

69,815.—LAMP.—Adison Judson, Brooklyn, N. Y.
1st, I claim the construction of the burner of a flat-wick kerosene or coal oil lamp with two or more stationary supports, D and F, or their equivalents, said supports being permanently attached to the burner, or forming portions of the same, and extending upward above the wick thereof, substantially as and to the effect hereinabove set forth.

69,816.—MACHINE FOR MAKING PATCH BOLTS.—Joseph Kaylor, Reserve Township, Pa.
I claim, in a machine for making patch bolts, the arrangement and use of a pair of recessed dies, which, when brought together, form a cylindrical cavity for the shank, and a conical cavity for the shoulder of the bolt, in combination with a swage or upsetting tool, having a cavity of polygonal cross section for shaping the head, and at the same time, upsetting the shoulder of the bolt in the conical cavity of the dies, constructed and arranged substantially in the manner and for the purposes hereinabove set forth.

69,817.—SPARK ARRESTER.—Patrick Kelly, Nashville, Tenn.
I claim the combination of the spark arrester, F, cone, E, flue, D, drum, C, cap, G, conductor, J, tube, K, band, H, and adjustable ring, A, as herein set forth for the purpose specified.

69,818.—MACHINE FOR COMPRESSING CARRIAGE WHEELS.—Henry Killam, New Haven, Conn.
I claim the combination and arrangement of the jaws, B, and their guides or plates, A, with the plate, C, when constructed so as to operate substantially in the manner herein set forth.

69,819.—AXLE TREE FOR WAGONS.—Geo. P. Kimball, San Francisco, Cal.
I claim the combination with a superposed wooden axle bed of the steel plate or spring axle tree, A, constructed and arranged for operation substantially as herein shown and for the purposes set forth.

69,820.—HOT-AIR FURNACE.—A. Kohler, Boston, Mass.
I claim, in combination with the flame chambers, I and X, and the hot-air chambers, G and N, the arrangement of the series of flues, L, running from the chamber, X, into a flue chamber directly under the main flue, E, and over the flame chamber, F, substantially as shown and described.

69,821.—APPARATUS FOR ACCUMULATING POWER.—Jas. F. Lester, Detroit, Mich., assignor to Eliza Ellsworth.
1st, I claim the combination and arrangement of the rods, M, M, the rocker, N, the lever, R, the base, O, and the pivot, P, arranged substantially as described for the purpose designed.

69,822.—JOURNAL BOX.—Edward F. Light, Worcester, Mass.
I claim the combination of the projection, D, oil hole, G, and grooves, d and e, and inclined ways, F, and chamber, C, with the bottom part, A, of the journal box, for the purposes stated.

69,823.—CURTAIN FIXTURE.—Henry Lovie, Philadelphia, Pa., and Albert Lovie, Prussia.
We claim a sliding screw rod, B, in combination with the pin or stud, C, and the roller, D, either fixed or revolving, substantially as shown and described.

69,824.—BUTTER DISH.—D. T. Lyon, West Meriden, Conn.
I claim the bearings of a revolving dish cover, constructed in the manner described, and so as to be attached or detached, as specified, that is to say, the slotted cylinder, A, upon each side of the dish, combined with a bearing fixed to the cover, either with or without the tumbler, F.

69,825.—EXPANSION DRILL.—Gilbert Mackinnon, Portsmouth N. H., assignor to himself and Hosen Crane, Milbury, Mass.
1st, I claim the arrangement of the cutters, E, in the recess, e, of the holder, A, and held in position between the holders and plate, B, by means of the set screws, as herein shown and described.

69,826.—IMPLEMENT FOR STRAINING BANDS ABOUT BOXES.—Samuel Marden, Newton, assignor to himself and Charles Porter, Cambridge, Mass.
I claim an implement for hooping boxes in which the lever, A, and bar, B, are combined with the yoke, C, substantially in the manner and for the purposes herein shown and described.

69,827.—MANUFACTURE OF CARRIAGE CLIPS.—Edwin Meeker, Bridgeport, Conn.
I claim dies, C and D, having recesses, d and e, and projecting punches, F, substantially as and for the purpose herein shown and described.

69,828.—WIND WHEEL.—E. W. Mills (assignor to the Empire Wind Mill Manufacturing Company), Syracuse, N. Y.
1st, I claim the sliding weights, d and e, upon the rods, c, arranged to operate upon the wind wheels, B, through the medium of the bell crank, b, b, and sliding collar, a, substantially as herein shown and described.

69,829.—ARTIFICIAL LEG.—Henry L. Mills, St. Paul, Minn.
1st, I claim the adjustable and movable leather socket, C, constructed, applied, and operating substantially as and for the purposes herein described.

69,830.—BAKING PAN.—G. W. Mitchell, New York city.
1st, I claim the combination roll, cake, and bread baker, consisting of a heater and roll or cake pan, substantially as and for the purpose as described.

69,831.—KNEELING CASE FOR CHURCHES.—L. Mooney, Baltimore, Md.
I claim the combination of the case, C, with an umbrella rack attached, with a gutter beneath, substantially as and for the purposes set forth.

69,832.—STUMP EXTRACTOR.—Garret J. Olendorf, Middlefield, N. Y.
1st, I claim lever beam, C, supported in the center by crooked pieces or frame, operating as described for the purpose specified.

69,833.—ICE-CREAM FREEZER.—O. Paddock, Watertown, N. Y.
1st, I claim, in an ice-cream freezer, in which the cream vessel is arranged to rotate upon its axis, as described, the combination with the cream vessel of a stationary cover which constitutes the bearing in which the upper portion of said vessel is supported and moves during its rotary movement, substantially as described.

69,834.—PLOW WHEELS.—L. E. Palmer, Le Roy, La.
I claim the construction and arrangement of the wheel, A, shaft, B, and braces, D and E, in connection with the wheel, C, which supports the front of the beam, as shown and described.

69,835.—WASHING MACHINE.—John Park, Joliet, Ill. Antedated Oct. 3, 1867.
I claim the spiral perforated bottom, in combination with the coiled spring, h, and rollers, d, when attached to a tub, and arranged and operating in the manner described.

69,836.—CORN PRINTER.—T. H. Parker and Daniel Kellison, Parkersburg, Ill.
1st, I claim the combination with the shovel, G, of the arm, H, bolts, A, and chain, L, whereby said shovel is made transferable, substantially as and for the purpose set forth.

69,837.—FLOODGATE.—John B. Stoner, Lacon, Ill. Antedated Oct. 1, 1867.
I claim a floodgate with escapes, reaching below, and with solid front above the escapes, and swung upon the cross beam by means of staples hinges placed in the edge or side of the beam, a, facing the source of the stream, the gate resting on an inclination upon the bearings, at I, F.

69,838.—FARM FENCE.—Edwin Stiles, Cleveland, Ohio.
I claim the special construction and arrangement of a fence as herein specified.

69,839.—FAUCET.—Septimus C. Stokes, Manchester, N. H.
I claim the above specified combination, as well as the arrangement of the gib, D, and the screws, E, with the plug and body of the faucet.

69,840.—PORTABLE FLOOD FENCE.—John B. Stoner, Lacon, Ill. Antedated September 27, 1867.
I claim a portable flood fence, consisting of a box, B, rail, c, blocks, d, d', and pins, e, e', arranged, combined, constructed, and operating substantially as described.

69,841.—CORN PLANTER.—L. Studly, Plum Hollow, Iowa.
I claim, 1st, The application directly to the axle, B, of seed droppers, C, which are provided with valves, I, in combination with cans, h, upon the seed tubes, g, and openers, f, upon the main frame, substantially as and for the purposes described.

69,842.—CORN PLANTER.—L. Studly, Plum Hollow, Iowa.
I claim, 1st, The application directly to the axle, B, of seed droppers, C, which are provided with valves, I, in combination with cans, h, upon the seed tubes, g, and openers, f, upon the main frame, substantially as and for the purposes described.

69,843.—CORN PLANTER.—L. Studly, Plum Hollow, Iowa.
I claim, 1st, The application directly to the axle, B, of seed droppers, C, which are provided with valves, I, in combination with cans, h, upon the seed tubes, g, and openers, f, upon the main frame, substantially as and for the purposes described.

69,844.—CORN PLANTER.—L. Studly, Plum Hollow, Iowa.
I claim, 1st, The application directly to the axle, B, of seed droppers, C, which are provided with valves, I, in combination with cans, h, upon the seed tubes, g, and openers, f, upon the main frame, substantially as and for the purposes described.

69,845.—CORN PLANTER.—L. Studly, Plum Hollow, Iowa.
I claim, 1st, The application directly to the axle, B, of seed droppers, C, which are provided with valves, I, in combination with cans, h, upon the seed tubes, g, and openers, f, upon the main frame, substantially as and for the purposes described.

69,846.—CORN PLANTER.—L. Studly, Plum Hollow, Iowa.
I claim, 1st, The application directly to the axle, B, of seed droppers, C, which are provided with valves, I, in combination with cans, h, upon the seed tubes, g, and openers, f, upon the main frame, substantially as and for the purposes described.

69,847.—CORN PLANTER.—L. Studly, Plum Hollow, Iowa.
I claim, 1st, The application directly to the axle, B, of seed droppers, C, which are provided with valves, I, in combination with cans, h, upon the seed tubes, g, and openers, f, upon the main frame, substantially as and for the purposes described.

69,848.—CORN PLANTER.—L. Studly, Plum Hollow, Iowa.
I claim, 1st, The application directly to the axle, B, of seed droppers, C, which are provided with valves, I, in combination with cans, h, upon the seed tubes, g, and openers, f, upon the main frame, substantially as and for the purposes described.

69,849.—CORN PLANTER.—L. Studly, Plum Hollow, Iowa.
I claim, 1st, The application directly to the axle, B, of seed droppers, C, which are provided with valves, I, in combination with cans, h, upon the seed tubes, g, and openers, f, upon the main frame, substantially as and for the purposes described.

69,850.—CORN PLANTER.—L. Studly, Plum Hollow, Iowa.
I claim, 1st, The application directly to the axle, B, of seed droppers, C, which are provided with valves, I, in combination with cans, h, upon the seed tubes, g, and openers, f, upon the main frame, substantially as and for the purposes described.

69,837.—STOVE.—Moses Pond, Boston, Mass.
I claim the combination and arrangement of one or more blocks of india rubber, or its equivalent, with the plates and the confining bolt or bolts of a stove, the whole being substantially as and for the purpose above specified.

69,838.—HARVESTER.—K. H. C. Preston, Manlius, N. Y.
I claim the shaft, D, having bearings, C, at or near the rear of the platform, A, its arms, b, provided with eyes, a, supporting the shaft, C, having at one end the crank, e, and provided with the teeth, d and e, all arranged and operating as described for the purpose specified.

69,839.—STEAM ENGINE.—George H. Reynolds, Mystic Bridge, Conn.
1st, I claim connecting the equilibrium valve, 12, and throttle valve, 14, so that both shall be operated together, substantially in the manner and for the purpose herein set forth.

69,840.—SASH FASTENER.—Stephen N. Richards, Chicago, Ill.
I claim the combination of the sliding catches, B, knobs, C, C, and springs, 8, with the exterior metallic sheath or enclosure, A, substantially as and for the purpose described.

69,841.—HANDLE FOR STOVE DOORS.—Charles H. Roberts, Troy, N. Y.
I claim the wooden knob, A, constructed as described, slotted to fit over the metal knob, a, cast on the stove door and held in position by means of the ring, B, substantially as and for the purpose specified.

69,842.—TERRASPIHERE.—Elezzer Root, Terra Haute, Ind.
I claim, 1st, The arms, E, sustaining the north end of the axis of the earth, A, combined with the axis, c, and the gear connection with the axis, B, so as to preserve its vertical position throughout the revolution of the earth in her orbit, substantially as described.

69,843.—CHURN.—Eli W. Russell (assignor to S. S. Russell, Ashley, Mo.).
I claim the combination of the shaft, a, having the pulley, F, fly wheel, G, and crank, e, secured thereto, with the shaft, b, having the pulley, E, and crank, c, when arranged so as to have the pitman, h, and crank, d, applied to either at will, substantially as and for the purposes herein described.

69,844.—COMPOUND PROTRACTOR.—William Rutherford, Athens, Ga.
1st, I claim the solid, base, B, projecting at right angles to the plane of the graduated semi-circle, so as to slide along the edge of the drawing board, considered as a meridian line, in combination therewith, and with the graduated rule, constructed as herein described.

69,845.—TATTING SHUTTLE.—S. Schofield, Plainville, Mass.
I claim, 1st, A tating shuttle provided with a detachable handle or holder, B, substantially as and for the purpose specified.

69,846.—COMPOSITION FOR INK.—J. Shaw, Bridgeport, Conn.
I claim an ink compound, of the ingredients herein above named, and mixed together in the manner and in or about the several proportions, substantially as specified.

69,847.—VENTILATING ATTACHMENT FOR RAILROAD CARS.—J. Shaw, Bridgeport, Conn.
I claim the ventilator constructed as described, consisting of the box, B, having the pivoted flap, D, in the ends, C, opening inward against the ends of the inclined partition plates, H, the sides, F, provided with the funnel shaped or fan-like openings, E, in which the pivoted inward projecting partitions, G, work, all arranged and operated as herein shown and described, for the purpose specified.

69,848.—SEEDING MACHINE.—B. A. Shearer, Crown Point Center, N. Y.
I claim the roller, G, provided with the grooves, d, and adjustable bars, e, in combination with the seed hopper, K, and chute, L, all arranged to operate substantially in the manner and for the purpose set forth.

69,849.—COTTON BALE TIE.—J. L. Sheppard, Charleston, S. C.
I claim a tie or lock for metal bale hoops, composed of a metal plate perforated as shown at a, provided with loops, b, slots, a', a', and bent portion of the plate, C, to admit of the attachment of the ends of the hoops as shown, and the turning up or down of the hoops, and drawing up or down of the tie or loop, parallel with the side of the bale, under the expansion of the same, when relieved of the pressure, substantially as set forth.

69,850.—FOLDING SEAT.—George Sherwood, Chicago, Ill.
I claim the combination and arrangement of the lugs, c, c', slots, d, d', axle, b, hub or cup, e, and screw or nut, i, with the standard, a, and arm, D, substantially as and for the purposes specified.

69,851.—TOY PISTOL.—W. J. Shipman, Portsmouth, Ohio.
I claim a toy pistol, constructed and arranged to operate in connection with a ball, substantially as described, for the purpose specified.

69,852.—MINERAL PAINT.—Jacob R. Smith, Keyport, N. J.
I claim a paint composed of the ingredients herein named, in the proportions and in the manner substantially as described.

69,853.—MACHINE FOR CUTTING TOBACCO.—Jared W. Smith, New Haven, Conn. Antedated October 3, 1867.
I claim, 1st, The beam or frame, F, arranged to revolve, and provided with one or more revolving circular knives, G, substantially as described, for the purpose specified.

69,854.—MACHINE FOR MOLDING PIPE.—Wm. Smith, Pittsburgh, Pa.
I claim, 1st, A revolving packer, g', tapering at or toward its upper end, and provided on the face or faces of such taper with grooves, l, or projecting flanges in lieu thereof, constructed and operated substantially as and for the purpose set forth.

69,855.—FOLDING SEAT.—George Sherwood, Chicago, Ill.
I claim the combination and arrangement of the lugs, c, c', slots, d, d', axle, b, hub or cup, e, and screw or nut, i, with the standard, a, and arm, D, substantially as and for the purposes specified.

69,856.—AUTOMATIC RAILROAD SWITCH.—George W. Starr, Clarkburg, West Va.
I claim, 1st, The lever, G, in combination with the slotted arm, I, and spring, v', when arranged to operate in connection with the rail, A, the connecting rods, j and i, and spring, k, as described, and for the purpose set forth.

69,857.—HOUSE HAY FORK.—B. F. Stewart, Freeport, Ohio.
I claim the curved prongs, B, B, pivoted at one end to the handle, A, and connected by the link, a, pivoted at one end to one prong, and working at the other end, in the other prong, constructed and operating substantially as and for the purpose herein described.

69,858.—FARM FENCE.—Edwin Stiles, Cleveland, Ohio.
I claim the special construction and arrangement of a fence as herein specified.

69,859.—FAUCET.—Septimus C. Stokes, Manchester, N. H.
I claim the above specified combination, as well as the arrangement of the gib, D, and the screws, E, with the plug and body of the faucet.

69,860.—PORTABLE FLOOD FENCE.—John B. Stoner, Lacon, Ill. Antedated September 27, 1867.
I claim a portable flood fence, consisting of a box, B, rail, c, blocks, d, d', and pins, e, e', arranged, combined, constructed, and operating substantially as described.

69,861.—CORN PLANTER.—L. Studly, Plum Hollow, Iowa.
I claim, 1st, The application directly to the axle, B, of seed droppers, C, which are provided with valves, I, in combination with cans, h, upon the seed tubes, g, and openers, f, upon the main frame, substantially as and for the purposes described.

69,862.—CORN PLANTER.—L. Studly, Plum Hollow, Iowa.
I claim, 1st, The application directly to the axle, B, of seed droppers, C, which are provided with valves, I, in combination with cans, h, upon the seed tubes, g, and openers, f, upon the main frame, substantially as and for the purposes described.

69,863.—CORN PLANTER.—L. Studly, Plum Hollow, Iowa.
I claim, 1st, The application directly to the axle, B, of seed droppers, C, which are provided with valves, I, in combination with cans, h, upon the seed tubes, g, and openers, f, upon the main frame, substantially as and for the purposes described.

69,864.—CORN PLANTER.—L. Studly, Plum Hollow, Iowa.
I claim, 1st, The application directly to the axle, B, of seed droppers, C, which are provided with valves, I, in combination with cans, h, upon the seed tubes, g, and openers, f, upon the main frame, substantially as and for the purposes described.

69,865.—CORN PLANTER.—L. Studly, Plum Hollow, Iowa.
I claim, 1st, The application directly to the axle, B, of seed droppers, C, which are provided with valves, I, in combination with cans, h, upon the seed tubes, g, and openers, f, upon the main frame, substantially as and for the purposes described.

69,866.—CORN PLANTER.—L. Studly, Plum Hollow, Iowa.
I claim, 1st, The application directly to the axle, B, of seed droppers, C, which are provided with valves, I, in combination with cans, h, upon the seed tubes, g, and openers, f, upon the main frame, substantially as and for the purposes described.

69,867.—CORN PLANTER.—L. Studly, Plum Hollow, Iowa.
I claim, 1st, The application directly to the axle, B, of seed droppers, C, which are provided with valves, I, in combination with cans, h, upon the seed tubes, g, and openers, f, upon the main frame, substantially as and for the purposes described.

69,868.—CORN PLANTER.—L. Studly, Plum Hollow, Iowa.
I claim, 1st, The application directly to the axle, B, of seed droppers, C, which are provided with valves, I, in combination with cans, h, upon the seed tubes, g, and openers, f, upon the main frame, substantially as and for the purposes described.

69,869.—CORN PLANTER.—L. Studly, Plum Hollow, Iowa.
I claim, 1st, The application directly to the axle, B, of seed droppers, C, which are provided with valves, I, in combination with cans, h, upon the seed tubes, g, and openers, f, upon the main frame, substantially as and for the purposes described.

69,870.—CORN PLANTER.—L. Studly, Plum Hollow, Iowa.
I claim, 1st, The application directly to the axle, B, of seed droppers, C, which are provided with valves, I, in combination with cans, h, upon the seed tubes, g, and openers, f, upon the main frame, substantially as and for the purposes described.

69,871.—CORN PLANTER.—L. Studly, Plum Hollow, Iowa.
I claim, 1st, The application directly to the axle, B, of seed droppers, C, which are provided with valves, I, in combination with cans, h, upon the seed tubes, g, and openers, f, upon the main frame, substantially as and for the purposes described.

69,872.—CORN PLANTER.—L. Studly, Plum Hollow, Iowa.
I claim, 1st, The application directly to the axle, B, of seed droppers, C, which are provided with valves, I, in combination with cans, h, upon the seed tubes, g, and openers, f, upon the main frame, substantially as and for the purposes described.

69,873.—CORN PLANTER.—L. Studly, Plum Hollow, Iowa.
I claim, 1st, The application directly to the axle, B, of seed droppers, C, which are provided with valves, I, in combination with cans, h, upon the seed tubes, g, and openers, f, upon the main frame, substantially as and for the purposes described.

69,874.—CORN PLANTER.—L. Studly, Plum Hollow, Iowa.
I claim, 1st, The application directly to the axle, B, of seed droppers, C, which are provided with valves, I, in combination with cans, h, upon the seed tubes, g, and openers, f, upon the main frame, substantially as and for the purposes described.

69,875.—CORN PLANTER.—L. Studly, Plum Hollow, Iowa.
I claim, 1st, The application directly to the axle, B, of seed droppers, C, which are provided with valves, I, in combination with cans, h, upon the seed tubes, g, and openers, f, upon the main frame, substantially as and for the purposes described.

69,876.—CORN PLANTER.—L. Studly, Plum Hollow, Iowa.
I claim, 1st, The application directly to the axle, B, of seed droppers, C, which are provided with valves, I, in combination with cans, h, upon the seed tubes, g, and openers, f, upon the main frame, substantially as and for the purposes described.

69,877.—CORN PLANTER.—L. Studly, Plum Hollow, Iowa.
I claim, 1st, The application directly to the axle, B, of seed droppers, C, which are provided with valves, I, in combination with cans, h, upon the seed tubes, g, and openers, f, upon the main frame, substantially as and for the purposes described.

69,878.—CORN PLANTER.—L. Studly, Plum Hollow, Iowa.
I claim, 1st, The application directly to the axle, B, of seed droppers, C, which are provided with valves, I, in combination with cans, h, upon the seed tubes, g, and openers, f, upon the main frame, substantially as and for the purposes described.

69,879.—CORN PLANTER.—L. Studly, Plum Hollow, Iowa.
I claim, 1st, The application directly to the axle, B, of seed droppers, C, which are provided with valves, I, in combination with cans, h, upon the seed tubes, g, and openers, f, upon the main frame, substantially as and for the purposes described.

69,880.—CORN PLANTER.—L. Studly, Plum Hollow, Iowa.
I claim, 1st, The application directly to the axle, B, of seed droppers, C, which are provided with valves, I, in combination with cans, h, upon the seed tubes, g, and openers, f, upon the main frame, substantially as and for the purposes described.

69,881.—CORN PLANTER.—L. Studly, Plum Hollow, Iowa.
I claim, 1st, The application directly to the axle, B, of seed droppers, C, which are provided with valves, I, in combination with cans, h, upon the seed tubes, g, and openers, f, upon the main frame, substantially as and for the purposes described.

69,882.—CORN PLANTER.—L. Studly, Plum Hollow, Iowa.
I claim, 1st, The application directly to the axle, B, of seed droppers, C, which are provided with valves, I, in combination with cans, h, upon the seed tubes, g, and openers, f, upon the main frame, substantially as and for the purposes described.

69,883.—CORN PLANTER.—L. Studly, Plum Hollow, Iowa.
I claim, 1st, The application directly to the axle, B, of seed droppers, C, which are provided with valves, I, in combination with cans, h, upon the seed tubes, g, and openers, f, upon the main frame, substantially as and for the purposes described.

69,884.—CORN PLANTER.—L. Studly, Plum Hollow, Iowa.
I claim, 1st, The application directly to the axle, B, of seed droppers, C, which are provided with valves, I, in combination with cans, h, upon the seed tubes, g, and openers, f, upon the main frame, substantially as and for the purposes described.

69,885.—CORN PLANTER.—L. Studly, Plum Hollow, Iowa.
I claim, 1st, The application directly to the axle, B, of seed droppers, C, which are provided with valves, I, in combination with cans, h, upon the seed tubes, g, and openers, f, upon the main frame, substantially as and for the purposes described.

69,886.—CORN PLANTER.—L. Studly, Plum Hollow, Iowa.
I claim, 1st, The application directly to the axle, B, of seed droppers, C, which are provided with valves, I, in combination with cans, h, upon the seed tubes, g, and openers, f, upon the main frame, substantially as and for the purposes described.

69,887.—CORN PLANTER.—L. Studly, Plum Hollow, Iowa.
I claim, 1st, The application directly to the axle, B, of seed droppers, C, which are provided with valves, I, in combination with cans, h, upon the seed tubes, g, and openers, f, upon the main frame, substantially as and for the purposes described.

69,888.—CORN PLANTER.—L. Studly, Plum Hollow, Iowa.
I claim, 1st, The application directly to the axle, B, of seed droppers, C, which are provided with valves, I, in combination with cans, h, upon the seed tubes, g, and openers, f, upon the main frame, substantially as and for the purposes described.

69,889.—CORN PLANTER.—L. Studly, Plum Hollow, Iowa.
I claim, 1st, The application directly to the axle, B, of seed droppers, C, which are provided with valves, I, in combination with cans, h, upon the seed tubes, g, and openers, f, upon the main frame, substantially as and for the purposes described.

69,890.—CORN PLANTER.—L. Studly, Plum Hollow, Iowa.
I claim, 1st, The application directly to the axle, B, of seed droppers, C, which are provided with valves, I, in combination with cans, h, upon the seed tubes, g, and openers, f, upon the main frame, substantially as and for the purposes described.

69,891.—CORN PLANTER.—L. Studly, Plum Hollow, Iowa.
I claim, 1st, The application directly to the axle, B, of seed droppers, C, which are provided with valves, I, in combination with cans, h, upon the seed tubes, g, and openers, f, upon the main frame, substantially as and for the purposes described.

69,892.—CORN PLANTER.—L. Studly, Plum Hollow, Iowa.
I claim, 1st, The application directly to the axle, B, of seed droppers, C, which are provided with valves, I, in combination with cans, h, upon the seed tubes, g, and openers, f, upon the main frame, substantially as and for the purposes described.

69,893.—CORN PLANTER.—L. Studly, Plum Hollow, Iowa.
I claim, 1st, The application directly to the axle, B, of seed droppers, C, which are provided with valves, I, in combination with cans, h, upon the seed tubes, g, and openers, f, upon the main frame, substantially as and for the purposes described.

69,894.—CORN PLANTER.—L. Studly, Plum Hollow, Iowa.
I claim, 1st, The application directly to the axle, B, of seed droppers, C, which are provided with valves, I, in combination with cans, h, upon the seed tubes, g, and openers, f, upon the main frame, substantially as and for the purposes described.

69,895.—CORN PLANTER.—L. Studly, Plum Hollow, Iowa.
I claim, 1st, The application directly to the axle, B, of seed droppers, C, which are provided with valves, I, in combination with cans, h, upon the seed tubes, g, and openers, f, upon the main frame, substantially as and for the purposes described.

69,896.—CORN PLANTER.—L. Studly, Plum Hollow, Iowa.
I claim, 1st, The application directly to the axle, B, of seed droppers, C, which are provided with valves, I, in combination with cans, h, upon the seed tubes, g, and openers, f, upon the main frame, substantially as and for the purposes described.

69,897.—CORN PLANTER.—L. Studly, Plum Hollow, Iowa.
I claim, 1st, The application directly to the axle, B, of seed droppers, C, which are provided with valves, I, in combination with cans, h, upon the seed tubes, g, and openers, f, upon the main frame, substantially as and for the purposes described.

69,898.—CORN PLANTER.

LARGE SALE OF PUBLIC PROPERTY.

OFFICE OF ARMY CLOTHING AND EQUIPAGE, No. 15 STATE STREET, NEW YORK, OCT. 4, 1867.

WILL BE SOLD AT PUBLIC AUCTION, at the Depot of Army Clothing and Equipage, No. 400 Washington street, New York city, on **TUESDAY, the 23d day of October, 1867,** commencing at 11 o'clock A. M., to be continued from day to day, the following articles of Army Clothing and Equipage:

21,621 Woolen Blankets.	24,622 C. P. Drawers.	24,623 Do. Do.	24,624 Do. Do.
3,311 Rubber do.	7,004 Donnet, do.	15,460 Trowsers, horse.	107,121 Forage Caps.
58,453 Pegged Boots, pairs.	107,121 Forage Caps.	32,274 Unif. hats, untrim'd.	21,296 Do. Int. Trimm'd.
88,125 Hand-w'd Boots, pairs.	3,078 Do. Cav. Trimm'd.	936 Do. Art. Trimm'd.	184,836 Great Coat Straps.
22,964 Great Coats, horse.	18,468 Jackets, Cav. pri.	18,468 Jackets, Cav. pri.	18,468 Jackets, Cav. pri.
35,418 Gray flannel Shirts.	8,285 Unif. Coats, Int. do.	2,869 Do. do. Art. do.	27,413 Hat Cords, Int.
109,919 Donnet Shirts.	460 Do. Hospital	144 Eagles for Lt. Art.	227,112 Hat Eagles.
134 Unif. Coats, Art. Musicians.	8 Talpiss, do. do.	7,439 Do. Castles.	4,022 Shells and Flames.
824 Jackets, Cav. do.	227,112 Hat Eagles.	58,815 Croquet Sabres.	47,088 Do. Cannon.
282 Unif. Coats, Engr-neers.	227,112 Hat Eagles.	29,797 Do. Cords, Cav.	30,197 Do. do. Art.
36 Do. do. Ordnance.	227,112 Hat Eagles.	1,232,024 Do. Cord and Tassels.	429 Hospi. Stewds. Cap Wreaths.
236 Do. do. Art. Music.	227,112 Hat Eagles.	30 Knit Drawers.	200 Unif. Coats, Inf.
981 Do. do. Int. do.	227,112 Hat Eagles.	425 Trowsers, foot, boys.	194 Pairs Boots, do.
10,600 Musketo Bars.	227,112 Hat Eagles.	100 Shirts, flannel, do.	739 Gray Blue Great Coats, foot.
229,272 Knapsacks.	227,112 Hat Eagles.	74 Trowsers, foot.	126 Trowsers, foot, gray blue.
5,999 Do. Straps, sets.	227,112 Hat Eagles.	17 Talmes and Hoods.	150 Unif. Coats, Art.
100,201 Haversacks, painted.	227,112 Hat Eagles.	14 Turbans, Zouave.	968 Wall Tent Poles, sets.
229 Do. unpainted.	227,112 Hat Eagles.	15,808 Common do. do.	19,747 Hospital Tent Pins.
222,511 Centenets.	227,112 Hat Eagles.	3,327 Wall do. large.	2,928 Stoves for Stibley Tents.
1,942,158 Hat Numbers.	227,112 Hat Eagles.	108 Stoves for Stibley Tents and Pipe.	37,216 Prs. Chevrons.
29,199 Do. Feathers.	227,112 Hat Eagles.	691,699 yds. Wated Lace.	5 Hat Cords, Ordn'ce.
1,022 Do. Bugles, Non. Reg.	227,112 Hat Eagles.	48,338 Leather N's Stocks.	35,912 Scales, corp's and privates, pairs.
1,600 Brass Scales, N.C.S., pairs.	227,112 Hat Eagles.	31 Iron Pots.	1,510 Machine Sewed Boots, pairs.
4,555 Brass Scales, Serg'ts., pairs.	227,112 Hat Eagles.		
100 Scale Butters, pairs.	227,112 Hat Eagles.		
434 Hosp. Stewards' Let-ters U.	227,112 Hat Eagles.		
427 Hosp. Stewards' Let-ters S.	227,112 Hat Eagles.		
1,512 Scale Slides, pairs.	227,112 Hat Eagles.		
4,417 Cap Covers.	227,112 Hat Eagles.		
4,263 Poles.	227,112 Hat Eagles.		
362 Rings for Lt. Art. Caps, pairs.	227,112 Hat Eagles.		
21 Red Hair Plumes.	227,112 Hat Eagles.		
15,033 Pickaxes.	227,112 Hat Eagles.		
16,825 Do. Handles.	227,112 Hat Eagles.		
10,836 Axes, felling.	227,112 Hat Eagles.		
6,969 Do. Handles.	227,112 Hat Eagles.		
16,616 Do. Shims.	227,112 Hat Eagles.		
33,297 Hatchets.	227,112 Hat Eagles.		
24,969 Do. Handles.	227,112 Hat Eagles.		
19,292 Do. Shims.	227,112 Hat Eagles.		
9,668 Spades.	227,112 Hat Eagles.		
1,544 Shovels.	227,112 Hat Eagles.		
5,547 Stove Pipe, pieces of.	227,112 Hat Eagles.		
2 Camp Color Stalls.	227,112 Hat Eagles.		
35 Canteen Straps.	227,112 Hat Eagles.		
66,208 Mess Pans.	227,112 Hat Eagles.		
36,194 Camp Kettles.	227,112 Hat Eagles.		
1,616 Do. Shims.	227,112 Hat Eagles.		
47 Wall Tent Flies.	227,112 Hat Eagles.		
3 Marquee Tents.	227,112 Hat Eagles.		
436 Hospi. Tent Poles, sets.	227,112 Hat Eagles.		

Also, a quantity of irregular and damaged clothing and equipage. Samples of all can be seen at the Depot for ten days prior to the sale, and catalogues will be furnished on application at this office, or at the Depot, No. 400 Washington street.

Terms cash, in government funds; ten per cent down and the balance before the goods are taken from the depots. The goods must be removed from the depot within ten days from date of sale, under forfeiture of purchase and the ten per cent deposited.

By order of the Quartermaster-General,
C. G. SAWTELLE,
Br. Brig-Gen'l and Q'm'r U. S. A., in charge of Depot A. C. and E.

BODINE'S JONVAL TURBINE WATER

Wheel, combining great economy in the use of water, simplicity, durability, and general adaptation to all positions in which water can be used as a motive power.

The undersigned manufacturer of the above wheel are prepared to furnish and warrant the same to give more power than any over-shot or half turbine wheel made using the same amount of water. These wheels have been tested with all the wheels of note in the country, and have never failed to prove their superiority. We therefore propose to put them in for any responsible party, warranting them to work up to our representations, failing in which we will take them out at our own expense. The attention of millwrights is invited to this wheel. Agents wanted in every county in the United States and Canada. Send for descriptive circular.

J. H. BODINE & CO.,
Mount Morris, N. W. York.

R. P. ROTHWELL,
Mining Engineer and Metallurgist, member of the Geological Society of France, etc.
Office.....Wilkesbarre, Pa.
Particular attention paid to examining and reporting on Gold, Tin, Copper, Iron, Coal, and all other kinds of mineral property, and to the establishment of mines and metallurgical works in any part of the country. Ors assayed.

PEIRCE'S STONE SURFACE, AN ANTI-OXIDIZER.

For Coating Iron Railings, Boilers, and Iron Work of all descriptions; Also, Oil Tanks, Acid Tanks, etc.

This surface has been put to the most severe Chemical tests, and has been proved to resist all change or decomposition. As an Anti-Oxidizer it has no equal; never cracks or scales off. Iron coated with this surface will not corrode, even in salt water.

L. NEWTON PIERCE & CO.,
144 Bowry St. 427 North Eleventh st., Philadelphia, Pa.

GILLESPIE HYDRAULIC GOVERNOR

For Water Wheels.—The only Governor that, on a change of labor, moves the gate instantly to the required point, and stops—gives an evenness of speed not excelled by the best steam engine; operates the largest gates with ease; saves a large per centage of repairs; and insures against accidents from breaking of shafts or belts. Entire satisfaction guaranteed. Send for circular.

JOHN S. ROGERS, Treas. Gillespie Governor Co.,
15 Kilby street, Boston, Mass.

PLATINUM—For all Laboratory and Manufacturing purposes.

Platinum Scrap and Ore Purchased. H. M. RAYNOR, Office 148 B'way, N. Y. 8 10th eo

SPICE CAN AND BLACKING BOX
Makers, send for circular of Painter's Patent Blowing device, dispensing with solder. Great economy, 30 Machines in use.

W. PAINTER & CO.,
43 Holliday street, Baltimore.

LE COUNT'S Patent Hollow Lathe Dogs.

8 Sizes, from 3/4 to 2 inches.....8 00
12 Sizes, from 3/4 to 4 inches.....17 00
Improved Machinists' Clamps, 5 sizes.....11 00
Stout Bolter-makers' Clamps.....4 00
All with Steel Screws, well fitted, and for circular.

C. W. LE COUNT, South Norwalk, Ct.

OIL! OIL!! OIL!!!

FIRST PREMIUM.....PARIS, 1867.
EXPOSITION UNIVERSELLE!
PEASE'S IMPROVED OILS!
Acknowledged the Best in the World! The Highest Award over all others!
Grand Silver Medal and Diploma!
The Only One to the United States awarded to
F. S. PEASE,
For the Greatest Excellence in Oils for Lubricating and Burning.

London.....1852.
WORLD'S FAIR—TWO PRIZE MEDALS
Awarded to F. S. PEASE for Improved Engine, Signal, Lard, and Premium Petroleum, as the Best made!
These Improved Oils cost no more than many of the common oils in market, while they are endorsed by the greatest experience and highest authority in the United States and Europe, and offered to the public upon the most thorough, reliable, and practical tests as the Best Oils made for
Railroads, Steamers, and for Machinery and Burning.

AMERICAN EMERY.

ANOWSIC EMERY, Manufactured at Bath, Me. All numbers from four up to one hundred and twenty. The only real mine in the world, excepting in Turkey. For sale in quantities to suit, at reduced prices, by
STANWOOD, MOELLAN & FULLER,
F. G. GODDARD, St. Louis, Mo.
A. ORVILLE FAY, Chicago, Ill.

From Stanley Eule and Level Co., New Britain, Conn.
"We have been using some numbers of your Emery on steel, and it gives good satisfaction. If it proves to work as on trial, this far, we shall use nothing else. For some reason, London emery does not give us good satisfaction on steel."
Bristol, Conn.:
Our men, who work by the job, say your Emery is better than any English or American Emery they ever used.
Mackintosh Hemphill Co., Pittsburgh, Pa.:
The quality of your Emery Cloth is excellent.

CAMDEN TUBE WORKS CO.

Manufacturers of all sizes of WROUGHT-IRON WELDED TUBE AND STEAM GAS FITTERS AND TUBE MANUFACTURERS' CO. S. viz: Pease's Improved Gas Pipe, screwing and cutting-off Machines of various sizes for both Steam and Hand Power; No. 2, machine screws and cuts off from 1/4 to 2-inch pipe; No. 3, machine screws and cuts off from 1/4 to 2-inch pipe; also, screwing stocks, dies, taps, reamers, drills, ratchet drills, pipe cutters, pipe tongs, and pipe 7' 9". No. 1, holds from 1/4 to 2-inch pipe, price \$10; No. 2, holds from 1/4 to 2-inch pipe, price \$22. Pease's patent pipe clamp which fits on an ordinary size and holds from 1/4 to 2-inch pipe, price \$5. Pease's patent screwing stocks, No. 1, stock and dies, screws, 1/4, 1/2, 3/4, and 1-inch pipe, price \$10; No. 2, stock and dies, both screws and cuts off 2 1/2, 3 1/2, and 4, 5, 6, 8, 10, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 34, 36, 38, 40, 42, 44, 46, 48, 50, 52, 54, 56, 58, 60, 62, 64, 66, 68, 70, 72, 74, 76, 78, 80, 82, 84, 86, 88, 90, 92, 94, 96, 98, 100, 102, 104, 106, 108, 110, 112, 114, 116, 118, 120, 122, 124, 126, 128, 130, 132, 134, 136, 138, 140, 142, 144, 146, 148, 150, 152, 154, 156, 158, 160, 162, 164, 166, 168, 170, 172, 174, 176, 178, 180, 182, 184, 186, 188, 190, 192, 194, 196, 198, 200, 202, 204, 206, 208, 210, 212, 214, 216, 218, 220, 222, 224, 226, 228, 230, 232, 234, 236, 238, 240, 242, 244, 246, 248, 250, 252, 254, 256, 258, 260, 262, 264, 266, 268, 270, 272, 274, 276, 278, 280, 282, 284, 286, 288, 290, 292, 294, 296, 298, 300, 302, 304, 306, 308, 310, 312, 314, 316, 318, 320, 322, 324, 326, 328, 330, 332, 334, 336, 338, 340, 342, 344, 346, 348, 350, 352, 354, 356, 358, 360, 362, 364, 366, 368, 370, 372, 374, 376, 378, 380, 382, 384, 386, 388, 390, 392, 394, 396, 398, 400, 402, 404, 406, 408, 410, 412, 414, 416, 418, 420, 422, 424, 426, 428, 430, 432, 434, 436, 438, 440, 442, 444, 446, 448, 450, 452, 454, 456, 458, 460, 462, 464, 466, 468, 470, 472, 474, 476, 478, 480, 482, 484, 486, 488, 490, 492, 494, 496, 498, 500, 502, 504, 506, 508, 510, 512, 514, 516, 518, 520, 522, 524, 526, 528, 530, 532, 534, 536, 538, 540, 542, 544, 546, 548, 550, 552, 554, 556, 558, 560, 562, 564, 566, 568, 570, 572, 574, 576, 578, 580, 582, 584, 586, 588, 590, 592, 594, 596, 598, 600, 602, 604, 606, 608, 610, 612, 614, 616, 618, 620, 622, 624, 626, 628, 630, 632, 634, 636, 638, 640, 642, 644, 646, 648, 650, 652, 654, 656, 658, 660, 662, 664, 666, 668, 670, 672, 674, 676, 678, 680, 682, 684, 686, 688, 690, 692, 694, 696, 698, 700, 702, 704, 706, 708, 710, 712, 714, 716, 718, 720, 722, 724, 726, 728, 730, 732, 734, 736, 738, 740, 742, 744, 746, 748, 750, 752, 754, 756, 758, 760, 762, 764, 766, 768, 770, 772, 774, 776, 778, 780, 782, 784, 786, 788, 790, 792, 794, 796, 798, 800, 802, 804, 806, 808, 810, 812, 814, 816, 818, 820, 822, 824, 826, 828, 830, 832, 834, 836, 838, 840, 842, 844, 846, 848, 850, 852, 854, 856, 858, 860, 862, 864, 866, 868, 870, 872, 874, 876, 878, 880, 882, 884, 886, 888, 890, 892, 894, 896, 898, 900, 902, 904, 906, 908, 910, 912, 914, 916, 918, 920, 922, 924, 926, 928, 930, 932, 934, 936, 938, 940, 942, 944, 946, 948, 950, 952, 954, 956, 958, 960, 962, 964, 966, 968, 970, 972, 974, 976, 978, 980, 982, 984, 986, 988, 990, 992, 994, 996, 998, 1000.

PRATT, WHITNEY & CO.,

Manufacturers of First-class Machinists' and Gun Tools, Engine Lathes, with State's Patent Taper Attachment, Standard Patent Hydraulic Engines for High Pressure and Special Machinery. Send for circulars, Hartford, Ct. 15 15th

THE FUEL SAVING FURNACE CO.,

No. 205 BROADWAY N. Y.
15 centoew if

IMPORTANT TO MANUFACTURERS
of Barrels and Shippers of Oil, Spirits, or Alcohol. Merrill's Improved Tongued, Grooved and Cemented joint barrels have proved to be the only reliable and perfectly tight barrel for shipping and storing oil, spirits, or alcohol. Oil has been shipped in this package to tropical climates and to K. rope, landing their contents entire and they will hold, for any length of time, petroleum spirits without loss. Their cost is but a trifle more than the common barrel, the machinery required being simple and not costly. For shop or territorial rights to manufacture and all information regarding them, apply to
JOSHUA MERRILL,
105 Water street, Boston, Mass.

STEAM ENGINES—

Superior in Construction, with Saul's Patent Frictionless Slide Valve, the most complete and economical Engine for Manufacturing purposes. Address
M. & T. SAULT, New Haven, Conn.

MOLDING CUTTERS MADE TO ORDER—

Send for circular to WM. H. BROWN,
44 Exchange st., Worcester, Mass.

AGENTS WANTED—To sell our Patent

Measuring Faucet. Send for circulars, Enterprise Manufacturing Co., of Pennsylvania, 129 Exchange Place, Philadelphia.

PAPER-BAG MACHINES, and STATE
Rights to use, for sale by
B. S. BINNEY,
61 Kilby st., Boston, Mass.

PORTABLE STEAM ENGINES, COM-

Binding the maximum of efficiency, durability, and economy with the minimum of weight and price. They are widely and favorably known, more than 600 being in use. All warranted satisfactory or no sale. Descriptive circulars sent on application. Address
J. C. ROADLEY & CO., Lawrence, Mass.

DOUGLASS MANUFACTURING CO.

Exclusive Manufacturers of
COOK'S PATENT
BORING IMPLEMENTS.
Also, a complete assortment of
MECHANICS' TOOLS.

Framing Chisels, Socket Firmer Chisels and Gouges, Socket Par- tur Chisels, Drawing K-ives, Screwdrivers Augers and Bits, Bung Bore, Boring Machines, Gimlets, Firmer Chisels and Gouges, Hollow Augers, Cork- screws, etc.

Warehouse, 70 Beekman street, New York.

MODELS, PATTERNS, EXPERIMENT-

AL and other Machinery, Models for the Patent Office, built to order by HOLSKE MACHINE CO., No. 25, 50, and 52 Water street, near Jefferson. Refer to SCIENTIFIC AMERICAN OFFICE.

WATER WHEELS.—

The Helical Jonval Turbine is manufactured by
J. E. STEVENSON, 40 Day street, New York.

CHARLES A. SEELY, CONSULTING

and Analytical Chemist, No. 25 Pine street, New York. Assays and Analyses of all kinds. Advice, Instruc- tions, reports, etc., on the useful arts.

AIR SPRING FORCE HAMMERS ARE

made by CHAS. MERRILL & SONS, 536 Grand street, New York. They will do more and better work, with less power and repairs, than any other Hammer. Send for a circular.

THE HARRISON BOILER

Is the only one now offered for sale entirely FREE from
DESTRUCTIVE EXPLOSION.

Twenty thousand horse-power have been made and put in operation within the last three years, with a constantly increasing demand. For descriptive circulars and price apply to the Harrison Boiler Works, Philadelphia, Pa., or to
J. B. HYDE, Agent,
Offices 9 and 10, No. 119 Broadway, N. Y.

A PRIZE MEDAL

Of the Paris Exhibition was awarded to
SHAW & JUSTICE
for their
DEAD STROKE POWER HAMMER.

IMPORTANT.

MOST VALUABLE MACHINE for all kinds of irreg- ular and straight work in wood, called the Variet's Mol- ing and Planing Machine, indispensable to competition in all branches of wood-working. Our improved guards make it safe to operate. Companion collars for cutters, saving 100 per cent, and feed table and connection, for waded moldings and planing, place it above all others. Evidence of the superiority of these machines is the large numbers we sell, in the different states, and parties laying aside others and purchasing ours, for cutting and shaping irregular forms, such work, etc.

We hear there are manufacturers infringing on some one or more of our nine patents in this machine. We cau- tion the public from purchasing such.
All communications must be addressed "Combination Molding and Planing Machine Company, Post-office Box 220, New York. All our machines are tested before de- livery, and warranted.
Send for descriptive pamphlet. Agents solicited, 14 14

TO IRON FOUNDERS.—

By using the waste heat from a Cupola Furnace, connected with a Harrison Boiler, a saving of the entire cost of fuel for the blast can be guaranteed.
As thus applied, it may be seen daily in operation from 2 to 5 o'clock p. m., at the Harrison Boiler works, Gray's Ferry Road, Philadelphia Pa. J. B. HYDE, Agent,
119 Broadway, New York.

RICHARDSON, MERIAM & CO.,

Manufacturers and Dealers in
DANIEL'S AND WOODWORTH PLANERS.
Boring, Matching, Molding, Mortising and Trenching Ma- chines, Scroll, Cut-off, and Shifting Saws, Saw Mills, Saw Arbors, Spoke and Wood-turning Lathes, and other wood working Machinery. Warehouse, 107 Liberty street, New York. Manufacturers, Worcester, Mass.

PATENT POWER AND FOOT-PUNCH-

ING PRESSES, the best in market, manufactured by
C. C. STILLER & CO., West Meriden, Conn. Cutting and stamping Dies made to order. Send for Circulars, 14 14

FOR FIRST-CLASS SHAFTING WITH

Patent Self-starting Boxes and adjustable Hangers, also Mill Work and special machinery, address
BULLARD & PARSONS, Hartford, Conn.

WOOD, LIGHT & CO.—MANUFAC-

turers of Machinists' Tools and Navy-smith Ham- mers, Lathes from 4 to 30 feet long, and from 15 to 100 inches swing. Planers from 34 to 60 inches wide and from 1 to 46 feet long. Upright Drills, Milling and Indexing Mach- ines, Profile or Edging Machines, Gun Barrel Machines, Shafting, Mill Gearings, Pulleys and Hangers, with Patent Self-starting Boxes.

Works, Junction Shop, Worcester, Mass.
Warehouse at 107 Liberty street, New York.

PRESSURE BLOWERS—Equal in Force

to Piston Blowers, and a perfect substitute for both Fan and Piston—running more easily than either. Adapted for Blast, and Cupola, and Heating Purposes, Forces Steamships, Boilers, Ventilation, etc., etc. Prices accord- ing to sizes, ranging from \$25 to \$1,500. Addrs. for Cir- cular
R. F. STURTEVANT,
72 Sudbury street, Boston, Mass.

THE CELEBRATED "SCHENCK"

WOODWORTH PLANERS,
WITH NEW AND IMPORTANT IMPROVEMENTS,
Manufactured by the
SCHENCK MACHINE CO., MATTHEW, N. Y.
JOHN H. SCHENCK, President.
T. J. B. SCHENCK, Treas.

IRON PLANERS, ENGINE LATHES,

Drills, and other Machinists' Tools, of Superior Qua- lity, on hand and finishing. For Sale Low. For Descrip- tion and Price, address NEW HAVEN MANUFACTUR- ING CO., New Haven, Ct.

LATHE CHUCKS—HORTON'S PAT-

ENT—from 4 to 36 inches. Manufacturer's address,
E. HORTON & SON, Windsor Locks, Conn.

ANDREWS'S PATENT PUMPS, EN-

SINES, etc.
CENTRIFUGAL PUMPS, from 30 Gals. to 40,000 Gals. per minute, capacity.
OSCILLATING ENGINES (Double and Single), from 1 to 50 horse-power.
TUBULAR BOILERS, from 2 to 20 horse-power, con- sume all smoke.
STEAM HOISTERS, to raise from 4 to 10 tons.
PORTABLE ENGINES, 1 to 4 horse-power.
These machines are all first-class, and are unsurpassed for compactness, simplicity, durability, and economy of working. For descriptive pamphlets and price list ad- dress the manufacturers.
W. D. ANDREWS & BROS.,
No. 415 Water street, N. Y.

PHOENIX IRON WORKS—

Established 1854.
GEO. S. LINCOLN & CO.,
Iron Founders and Manufacturers of Machinists' Tools
54 to 60 Arch street, Hart-ord, Conn.
We are prepared to furnish first-class Machinists' Tools on short notice. Samples may be



PATENTS

The First Inquiry that presents itself to one who has made any improvement or discovery is: "Can I obtain a Patent?" A positive answer can only be had by presenting a complete application for a Patent to the Commissioner of Patents. An application consists of a Model, Drawings, Oath, and full Specification. Various official rules and formalities must also be observed. The efforts of the inventor to do all this business himself are generally without success. After a season of great perplexity and delay, he is usually glad to seek the aid of persons experienced in patent business, and have all the work done over again. The best plan is to solicit proper advice at the beginning.

If the parties consulted are honorable men, the inventor may safely confide his ideas to them: they will advise whether the improvement is probably patentable, and will give him all the directions needed to protect his rights.

Messrs. MUNN & CO., in connection with the publication of the SCIENTIFIC AMERICAN, have been actively engaged in the business of obtaining patents for over twenty years—nearly a quarter of a century. Over Fifty thousand inventors have had benefit from our counsel. More than one third of all patents granted are obtained by this firm.

Those who have made inventions and desire to consult with us, are cordially invited to do so. We shall be happy to see them in person, at our office, or to advise them by letter. In all cases, they may expect from us an honest opinion. For such consultations, opinion, and advice, we make no charge. A pen-and-ink sketch, and a description of the invention should be sent, together with stamps for return postage. Write plainly, do not use pencil nor pale ink; be brief.

All business committed to our care, and all consultations, are kept by us secret and strictly confidential. Address MUNN & CO., 37 Park Row, New York.

Preliminary Examination.—In order to obtain a Preliminary Examination, make out a written description of the invention in your own words, and a rough pencil or pen-and-ink sketch. Send these with the fee of \$5 by mail, addressed to MUNN & CO., 37 Park Row, and in due time you will receive an acknowledgment thereof, followed by a written report in regard to the patentability of your improvement. The Preliminary Examination consists of a special search, which we make with great care, among the models and patents at Washington to ascertain whether the improvement presented is patentable.

In Order to Apply for a Patent. the law requires that a model shall be furnished, not over a foot in any dimensions, smaller, if possible. Send the model by express, pre-paid, addressed to MUNN & CO., 37 Park Row, N. Y., together with a description of its operation and merits. On receipt thereof we will examine the invention carefully and advise the party as to its patentability, free of charge.

The model should be neatly made of any suitable materials, strongly fastened, without glue, and neatly painted. The name of the inventor should be engraved or painted upon it. When the invention consists of an improvement upon some other machine, a full working model of the whole machine will not be necessary. But the model must be sufficiently perfect to show, with clearness, the nature and operation of the improvement.

New medicines or medical compounds, and useful mixtures of all kinds, are patentable. When the invention consists of a medicine or compound, or a new article of manufacture, or a new composition, samples of the article must be furnished, neatly put up. Also, send us a full statement of the ingredients, proportions, mode of preparation, uses, and merits.

Reissues.—A reissue is granted to the original patentee, his heirs, or the assignees of the entire interest, when by reason of an insufficient or defective specification the original patent is invalid, provided the error has arisen from inadvertence, accident, or mistake without any fraudulent or deceptive intention.

A patentee may, at his option, have in his reissue a separate patent for each distinct part of the invention comprehended in his original application, by paying the required fee in each case, and complying with the other requirements of the law, as in original applications. Each division of a reissue constitutes the subject of a separate specification descriptive of the part or parts of the invention claimed in such division; and the drawing may represent only such part or parts. Address MUNN & CO., 37 Park Row, for full particulars.

Interferences.—When each of two or more persons claims to be the first inventor of the same thing, an "interference" is declared before the Commissioner. It is before the Commissioner. Nor does the fact that one of the parties has already obtained a patent prevent such an interference; for, although the Commissioner has no power to cancel a patent already issued, he may, if he finds that another person was the prior inventor, give him also a patent, and thus place them on an equal footing before the courts and the public.

Caveats.—A caveat gives a limited but immediate protection, and is particularly useful where the invention is not fully completed, or the model is not ready, or further time is wanted for experiment or study. After a caveat has been filed, the Patent Office will not issue a patent for the same invention to any other person, without giving notice to the Caveator, who is then allowed three months time to file in an application for a patent. A caveat, to be of any value, should contain a clear and concise description of the invention, so far as it has been completed, illustrated by drawings when the object admits. In order to file a caveat the inventor needs only to send us a letter containing a sketch of the invention, with a description in his own words. Address MUNN & CO., 37 Park Row, N. Y.

Additions can be made to Caveats at any time. A caveat runs one year, and can be renewed on payment of \$10 a year for as long a period as desired.

Quick Applications.—When, from any reason, parties are desirous of applying for Patents or Caveats, in GREAT HASTE, without a moment's loss of time, they have only to write or telegraph us, especially to that effect, and we will make special exertions for them. We can prepare and mail the necessary papers at less than an hour's notice, if required.

Foreign Patents.—American inventors should bear in mind that, as a general rule, any invention that is valuable to the patentee in this country is worth equally as much in England and some other foreign countries. Five Patents—American, English, French, Belgian, and Prussian—will secure an inventor exclusive monopoly to his discovery among ONE HUNDRED AND THIRTY MILLIONS of the most intelligent people in the world. The facilities of business and steam communication are such that patents can be obtained abroad by our citizens almost as easily as at home. The majority of all patents taken out by Americans in foreign countries are obtained through the SCIENTIFIC AMERICAN PATENT AGENCY. A Circular containing further information and a Synopsis of the Patent Laws of various countries will be furnished on application to Messrs. MUNN & CO.

For Instructions concerning Foreign Patents, Reissues, Interferences, Hints on Selling Patents, Rules and Proceedings at the Patent Office, the Patent Laws, etc., see our Instruction Book. Sent free by mail on application. Those who receive more than one copy thereof will oblige by presenting them to their friends.

Address all communications to
MUNN & CO.,
No. 37 Park Row, New York City.
Office in Washington, Cor. F and 7th streets.

Patents are Granted for Seventeen Years, the following being a schedule of fees:—
On filing each caveat.....\$10
On filing each application for a Patent, except for a design.....\$15
On issuing each original Patent.....\$30
On appeal to Commissioner of Patents.....\$25
On application for Reissue.....\$30
On application for Extension of Patent.....\$30
On granting the Extension.....\$20
On filing a Disclaimer.....\$10
On filing application for Design (three and a half years).....\$10
On filing application for Design (seven years).....\$15
On filing application for Design (fourteen years).....\$30
In addition to which there are some small revenue-stamp taxes. Residents of Canada and Nova Scotia pay \$50 on application.

PATENT CLAIMS.—Persons desiring the claim of any invention, patented within thirty years, can obtain a copy by addressing a note to this office, giving name of patentee and date of patent, when known, and enclosing \$1 as a fee for copying. We can also furnish a sketch of any patented machine to accompany the claim, at a reasonable additional cost. Address MUNN & CO., Patent Solicitors, No. 37 Park Row, New York.

RECEIPTS.—When money is paid at the office for subscriptions, a receipt for it will be given; but when subscribers remit their money by mail, they may consider the arrival of the first paper a bona-fide acknowledgment of their funds.

CITY SUBSCRIBERS.—The SCIENTIFIC AMERICAN will be delivered in every part of the city at \$4 a year. Single copies for sale at all the News Stands in this city, Brooklyn, Jersey City, and Williamsburg, and by most of the News Dealers in the United States.

Advertisements.

A limited number of advertisements will be admitted in this page on the following terms:—
Seventy-five cents a line, each insertion, for solid matter; one dollar a line for space occupied by engravings.

BEFORE BUYING TURBINE WATER WHEELS.—Send for Circulars of
PEEKSKILL MANUFACTURING CO.,
18 130s] Peekskill, N. Y.

WANTED.—To make an arrangement with a live man in every County, who wishes to make money, and can give good references. No capital required. Will sell a business now paying \$1,500 per month, and reply on profits for my pay. Address
J. C. TILTON,
18 20s] Pittsburgh, Pa.

HARTFORD STEAM-BOILER INSPECTION AND INSURANCE CO. Capital \$500,000. J. M. Allen, Pres't; C. M. Pond, Vice Pres't; R. H. Hayden, Sec. Locomotive, Stationary, and Marine Boilers carefully inspected, and policies of insurance issued against loss or damage to Boilers, Machinery, and adjoining property. From explosion. Office 130 Broadway.
17 40s] A. G. BENSON, Jr., Manager.

AN ILLUSTRATED MANUAL of 112 Pages, describing all Mathematical Instruments and drawing material, their uses and how to keep them in order, with priced catalogue attached, sent by mail free by
JAMES W. QUEEN & CO.,
17 40s] 924 Chestnut street, Philadelphia, Pa.

DRAWING INSTRUMENTS OF EVERY DESCRIPTION—Swiss, German Silver, and French, separate and in cases—DRAWING BOARDS, DRAWING PAPER, WATER COLORS, TRANSITS, LEVELS, COMPASSES, etc. And all supplies for Engineers, Architects, or Machinists. A Priced and Illustrated Catalogue sent free on application.
14 120s] WILLIAM Y. MCALLISTER, 728 Chestnut street, Philadelphia, Pa.

PLANE AND MATCHER for \$350, a good, new machine. S. C. HILLS, 12 Platt st. N. Y.

EMPLOYMENT! \$10 a day and Expenses paid. Circulars free. O. T. GAREY, Bideford, Me.

MANUFACTURERS OF SMALL BRASS Castings please address HEAN & BALDERSTON, 21 Lexington st., Baltimore, Md.

PARTIES WISHING TO BUY RIGHTS To manufacture a Simple, Cheap, and Durable Bed Bottom, rapidly coming into use, address
18 14] S. C. JENNINGS, Wantoma, Wis.

FOR SALE.—The whole or State and county Rights of the Patent Vegetable Cutter. Patented last July. Apply or address JOHN M. SCHWARTZ, 1530 Parrish st., Philadelphia, Pa.
17 12]

INVENTORS having Patents to sell will send it to their advantage to visit the rooms of GEO. M. DANFORTH & CO., Inventors' Exchange, 512 Broadway, New York, opposite St. Nicholas Hotel. Send stamp for circular.
18 2*

PATENT RIGHT FOR SALE.—A New Sash Supporter that can be made and sold cheap. Either the whole Right, or State or County Rights will be sold low. Address
17 12] Bridgeport, Conn.

ENGINE LATHES, Hand Lathes, Foot Lathes, and Tapping Machines, of the best design and first-class workmanship. Also, special machinery, small tools, etc. Patent articles made to order.
18 54] FLATHER & CO., No. 11 River st., Nashua, N. H.

PAPER-COLLAR MACHINES.—Experimental Machinery and Models—the latest improved machine for Plaiting Linen Bosoms and Collars. Patterns, Drawings, and Letters at the corner of Union and Fulton sts., Troy, N. Y. 18 2* W. H. TOLHURST.

CIRCULAR

These Saws are meeting with
UNPRECEDENTED SUCCESS,
And their
GREAT SUPERIORITY OVER EVERY OTHER KIND,
Both as to
EFFICIENCY AND ECONOMY,
Is now fully established.

Emerson's Patent Perforated
CROSS CUTTING, CIRCULAR, AND LONG SAWS.
All Gunning Avoided. Also,
EMERSON'S PATENT ADJUSTABLE SWAGE,
For Spreading, Sharpening, and Shaping the Teeth of all Splitting Saws. Price \$5.
Manufactured by the
AMERICAN SAW COMPANY,
Office No. 2 Jacob street, near Ferry street, New York.
18 14] Send for New Descriptive Pamphlet and Price List.

TURBINE WATER WHEELS.



GEORGE TALBOT,
17 13* 11] No. 96 LIBERTY STREET, NEW YORK.

CIRCULAR SAWS.
N. W. SPAULDING & BROTHERS,
224 Washington street,
CHICAGO, ILL.

Manufacturers of Spaulding's Patent Adjustable-Tooth Circular Saws, adapted to sawing all kinds of timber. These teeth have been in successful use for the last eight years. They save saws, power, and time, making the safest, most durable, and economical saw in use. Particular attention paid to straightening and repairing large saws. All saws sold and work done warranted.
16 20s 60w] Send for descriptive pamphlet.

EUROPEAN AGENCY for the Exhibition and sale of American Patents and Manufactures.
BLANCHARD & McKEAN,
No. 3 Rue de la Paix, Paris, France.
Will attend personally and promptly to all business relating to the interests of American Inventors and Manufacturers in Europe. Correspondence solicited.
GEO. A. BLANCHARD, 15 170s] [J. A. McKEAN, 16 20s 60w]

BOILER, SAFE, & RAILING-MAKERS' TOOLS.—For price list of Power Pumps, Rotary Shears, and Vertical Drills, address
16 30s] GREENLEAF & CO., Indianapolis, Ind.

SLATE SLABS,
Any size, shape, and thickness for sale by
HUDSON RIVER SLATE CO.
Samples, Plain and Marbleized, shown at their office, 16 40s*] 25 Park Row, N. Y.

AGENTS WANTED.—\$10 to \$20 a day, to introduce our new patent Star Shuttle Sewing Machine. Price \$30. It uses two threads, and makes the genuine LOCK STITCH. All other low-priced machines make the Chain Stitch. Exclusive territory given. Send for circulars. W. G. WILSON & CO., Manufacturers, Cleveland, Ohio.
11 130s]

DANGEROUS EXPLOSIONS IMPOSSIBLE! Baker's Patent No. 3 Shell Boiler for all purposes can be seen running on engine. Private Dwellings and other buildings warmed and ventilated by our Patent Steam, Water, and Vapor Apparatus. Full particulars and estimates of cost furnished on application.
BAKER, SMITH & CO.,
18 41] 57 Meier street, New York.

WONDERFUL INVENTION.—Driver's Fountain Kerosene Lamp.—Non-explosive, cheap, durable, and ornamental. Recently patented. Now on exhibition, and for sale by State or County Rights. All who see endorse it as perfect. Send stamp for circular. Address G. M. DANFORTH & CO., Inventors' Exchange, 512 Broadway, N. Y. "I recommend it as a good and useful invention."—Horace Greeley.
17 12]

STEAM PLEASURE CARRIAGE for sale. Weighs 500 lbs. complete. Made of the best material with steel boiler, 307 1/2 copper flues; 2 brass oscillating direct-acting cylinders, 3 1/2 bore, 10 stroke. All got up in the best style and finish. Runs rapidly; burns coal and water for 10 miles; is entirely new and will be sold for \$800. Address
17 12] H. S. TAYLOR, Derby Line, Vt.

THE REPEATING VEST-POCKET Light, or Match, without any brimstone, in elegant silver cases, about the size of a Lady's watch. Will last a lifetime; are self-lighting, giving instantly a clear, beautiful flame; will light fifty times in succession without replenishing. The material is cheap and perfectly safe. Sample case, filled with lights, sent by mail to any address on receipt of 63 cents. Liberal inducements to agents. Address
18 14] L. F. STANDISH, Springfield, Mass.

PAT. ERASER
Pencil Sharpener, and Pen Holder combined. Sells at sight. Agents wanted. Can make \$50 a week. Sample, post paid, 25 cents, or two styles for 40 cents. Address
18 41] MORSE ERASER CO., 404 Library st., Philadelphia, Pa.

THE BEST BOLT CUTTER IS MERRI-
MAN'S PATENT.—Which cuts a full, smooth thread at once passing over the bolt. The dies revolve, are instantly adjustable to the slightest variation, and open to release the bolt. Foreign Patents made. Send for circulars.
16 14] H. B. BROWN & CO., New Haven, Conn.

WITH
EMERSON'S
PATENT
MOVABLE
TEETH.
These Saws are meeting with
UNPRECEDENTED SUCCESS,
And their
GREAT SUPERIORITY OVER EVERY OTHER KIND,
Both as to
EFFICIENCY AND ECONOMY,
Is now fully established.

Emerson's Patent Perforated
CROSS CUTTING, CIRCULAR, AND LONG SAWS.
All Gunning Avoided. Also,
EMERSON'S PATENT ADJUSTABLE SWAGE,
For Spreading, Sharpening, and Shaping the Teeth of all Splitting Saws. Price \$5.
Manufactured by the
AMERICAN SAW COMPANY,
Office No. 2 Jacob street, near Ferry street, New York.
18 14] Send for New Descriptive Pamphlet and Price List.

WHEATON'S OINTMENT cures the Itch. WHEATON'S OINTMENT cures Old Sores. WHEATON'S OINTMENT cures all diseases of the Skin. Price 50 cents.—by mail 60 cents. All Druggists sell it. WEEKS & POTTER, Boston, Proprietors. 114 15* or 16-N

GUN AND SEWING MACHINE Screws of all kinds and sizes on hand and made to order by the
LAMB KNITTING MACHINE MFG CO.,
Successors to the
7 13* 04 11] Mass. Arms Co., Chicopee Falls, Mass.

WANTED—AGENTS.—\$75 to \$200 per month, everywhere, male and female, to introduce throughout the United States, the GENUINE IMPROVED COMMON SENSE FAMILY SEWING MACHINE. This machine will stitch, hem, fell, tick, quilt, blind, braid, and embroider in a most superior manner. Price only \$18. Fully warranted for 5 years. We will pay \$1,000 for any machine that will sew a stronger, more beautiful, or more elastic seam than ours. It makes the "Elastic Lock Stitch." Every needle which can be cut, and still the cloth cannot be pulled apart without tearing it. We pay agents from \$75 to \$200 per month and expenses, or a commission from which twice that amount can be made. Address SECOMB & CO., Cleveland, Ohio.
CAUTION.—Do not be imposed upon by other parties palming off worthless cast-iron machines, under the same name or otherwise. Ours is the only genuine and really practical cheap machine manufactured.
15 4*

FOR the Best Spoke Machinery, address the Manufacturer, J. GLEASON, 1059 Germantown avenue, Philadelphia, Pa.
15 3*

JUST PUBLISHED—THE INVENTOR'S and MECHANIC'S GUIDE.—A new book upon Mechanics, Patents, and New Inventions. Containing the U. S. Patent Laws, Rules and Directions for doing business at the Patent Office; 112 diagrams of the best mechanical movements, with descriptions; the Condensing Steam Engine, with engraving and description; How to Invent; How to Obtain Patents; Hints upon the Value of Patents; How to sell Patents; Forms for assignments; Information upon the Rights of Inventors, Assignees and Joint Owners; Instructions as to Interferences, Reissues, Extensions, Caveats, together with a great variety of useful information in regard to patents, new inventions and scientific subjects, with scientific tables, and many illustrations. 198 pages. This is a most valuable work. Price only 25 cents. Address MUNN & CO., 37 Park Row, N. Y.

A MESSEURS LES INVENTEURS.
Avis important. Les inventeurs non familiers avec la langue Anglaise, et qui préféreraient nous communiquer leurs inventions en Français peuvent nous adresser dans leur langue natale. Envoyez nous un dessin et une description concise pour notre examen. Toutes communications seront reçues en confiance.
MUNN & CO.,
Scientific American Office, No. 37 Park Row, New York

Zur Beachtung für deutsche Erfinder.
Nach dem neuen Patent-Gesetz der Vereinigten Staaten, können Deutsche, sowie Bürger aller Länder, mit einer einzigen Ausnahme, Patente zu denselben Bedingungen erlangen, wie Bürger der Ver. Staaten.
Erläuterungen über die, zur Erlangung von Patenten nötigen Schritte, können in deutscher Sprache schriftlich an uns gerichtet werden und Erfinder, welche vorzüglich nach unserer Office kommen werden von Deutschen prompt bedient werden.

MUNN & CO.
37 Park Row, New York

Die Patentgesetze der Vereinigten Staaten, nebst den Regeln und der Geschäftsordnung der Patentoffice, und Anleitungen für die Erfinder um sich Patente zu sichern, sind in Buch-Format von uns in deutscher Sprache herausgegeben, und werden gratis an alle verlannt, welche darum mündlich oder schriftlich einfordern.
Man adressire
MUNN & CO.
37 Park Row, New York

Die Patentgesetze der Vereinigten Staaten, nebst den Regeln und der Geschäftsordnung der Patentoffice, und Anleitungen für die Erfinder um sich Patente zu sichern, sind in Buch-Format von uns in deutscher Sprache herausgegeben, und werden gratis an alle verlannt, welche darum mündlich oder schriftlich einfordern.
Man adressire
MUNN & CO.
37 Park Row, New York

MUNN & CO.
37 Park Row, New York

Scientific American,
4000 Book Pages a Year
THE
BEST NEWSPAPER
IN THE WORLD.

Published Twenty-Two Years.

This paper differs materially from other publications being an illustrated weekly paper containing 16 large pages, devoted to the promulgation of information relating to the various Mechanical and Chemical Arts, Photography, Manufactures, Agriculture, Patents, Inventions, Engineering, Mill Work, etc.

Every number contains several beautiful engravings of new machines.

All the most valuable discoveries are delineated and described in its issues, so that, as respects inventions, it may be justly regarded as an illustrated Repository, where the inventor may learn what has been done before him in the same field which he is exploring, and where he may bring to the world a knowledge of his own achievements.

The contributors to the SCIENTIFIC AMERICAN are among the most eminent scientific practical men of the times.

Mechanics, Inventors, Engineers, Chemists, Manufacturers, Agriculturists, and people in every walk of life, will find the SCIENTIFIC AMERICAN to be of great value in their respective callings. Its counsels and suggestions will save them hundreds of dollars annually, beside affording them a continual source of knowledge.

An official list of all Patents granted, together with the claims thereof, is published weekly.

The form of the SCIENTIFIC AMERICAN is adapted for binding and preservation; and the yearly numbers make two splendid volumes of nearly one thousand quarto pages.

Published Weekly, \$3 a year, \$1.50 half-year, 10 copies for 1 year, \$25. Specimen copies sent gratis. Address
MUNN & CO.,
No. 37 Park Row, New York.

JUST PUBLISHED—THE INVENTOR'S AND MECHANIC'S GUIDE.—A new book upon Mechanics, Patents, and New Inventions. Containing the U. S. Patent Laws, Rules and Directions for doing business at the Patent Office; 112 diagrams of the best mechanical movements, with descriptions; the Condensing Steam Engine, with engraving and description; How to Invent; How to Obtain Patents; Hints upon the Value of Patents; How to sell Patents; Forms for assignments; Information upon the Rights of Inventors, Assignees and Joint Owners; U. S. Census by counties, together with a great variety of useful scientific information in regard to patents, new inventions and scientific subjects, with scientific tables, and many illustrations. 198 pages. This is a most valuable work. Price only 25 cents. Address MUNN & CO., 37 Park Row, New York.